




na.row.up™ 5-slider

your lighting rep has
recommended the **na.row.up™**
cylinder pendant for your project
Let's take a quick look:



sizes and lumens

P7606.up **P7612.up** **P7618.up** **P7624.up**

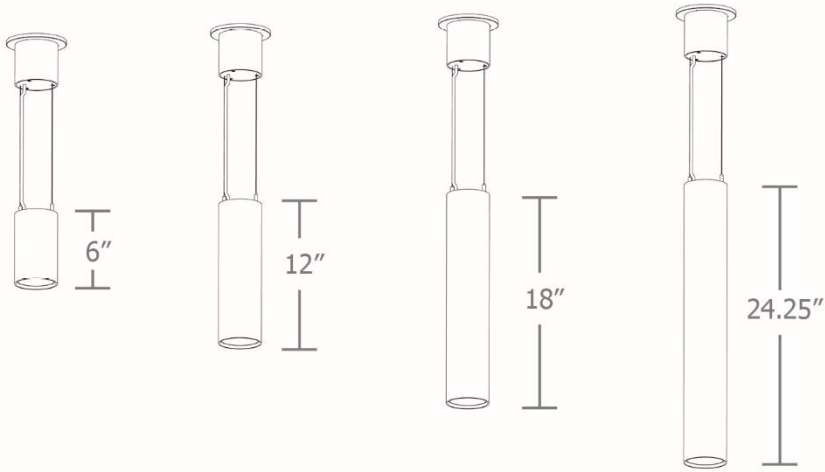

direct/ indirect

- P7606 (06"): 395–1985 lm / 340-845 lm
- P7612 (12"): 395–2780 lm / 340-1185 lm
- P7618 (18"): 395–2780 lm / 340-1185 lm
- P7624 (24"): 395–2780 lm / 340-1185 lm



construction


extruded aluminum canopy,
painted to match fixture

canopy mounted drivers, constant current,
field maintainable, universal input (120-277v),
0-10v controllable to 5% dimming

up light COB in 2700, 3000, 3500 or 4000K,
90+ CRI standard
wd855 frost acrylic top lens protects
COB from dust and shields it from view

15 standard powder
coat paint finishes
+ custom RAL colors

na.row.up™ 5-slider

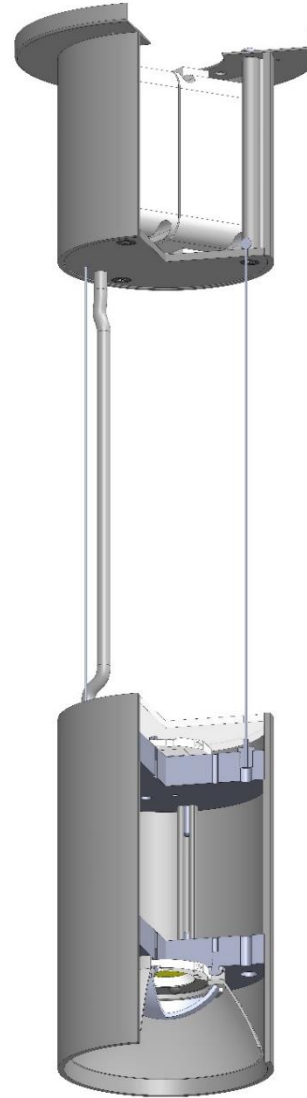

dual stainless-steel ultra-thin cables
with field adjustable micro-grippers
allowing for exact desired mounting
height

slim silver braid power cord standard


3.5" dia. smooth extruded
aluminum outer housing

downlight COB in 2700, 3000, 3500 or 4000K.
90+ CRI, field changeable downlight optics: 20°
(spot), 30° (med), 50° (wide), 90° (extra wide)



performance

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
na.row.up	+	31.7 fc	44.9 fc	22.3 fc	2.0:1	1.4:1

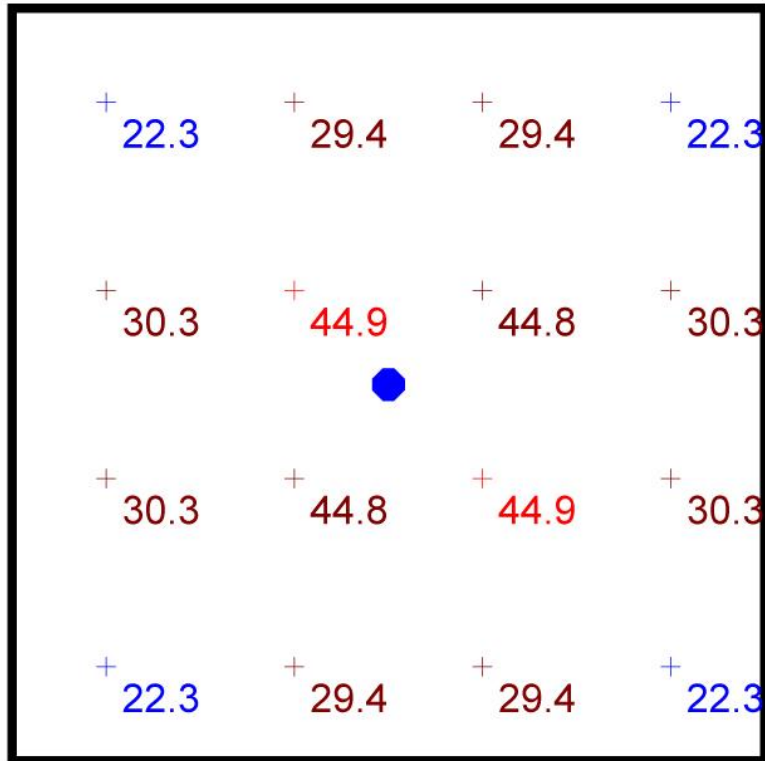

Plan View
Scale - 1" = 2ft

- 8' x 8' x 14'H space
- 80/50/20 reflectances
- bottom of fixture at 10' aff
- FC readings at 2.5' aff
- layout conducted using 12" length unit with 90 CRI (H3) 2780 lm direct and (H1) 1185 lm indirect lumen package





www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

na.row.up™ 5-slider

