




maxx™ 5-slider

your lighting rep has recommended the **maxx™** pendant for your project. Let's take a quick look:




sizes and lumens


P7726

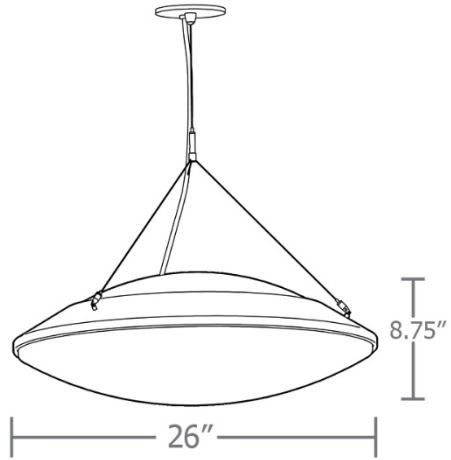

P7738

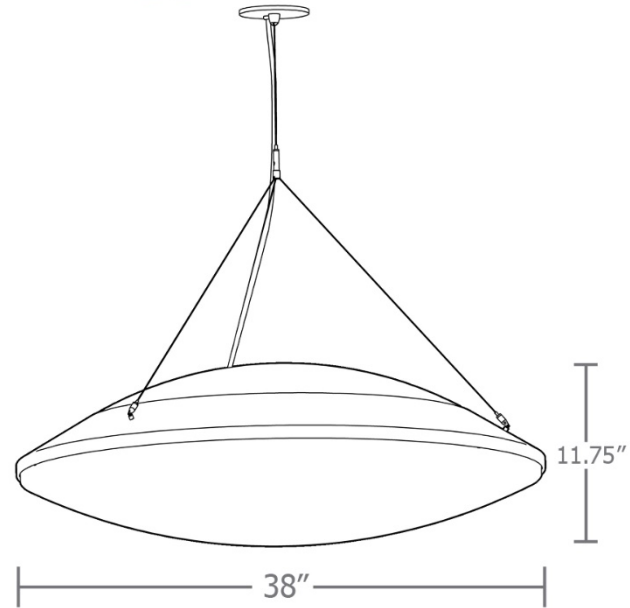

- P7726 (26") / 2340 – 7020 lm
- P7738 (36") / 4180 – 13370 lm

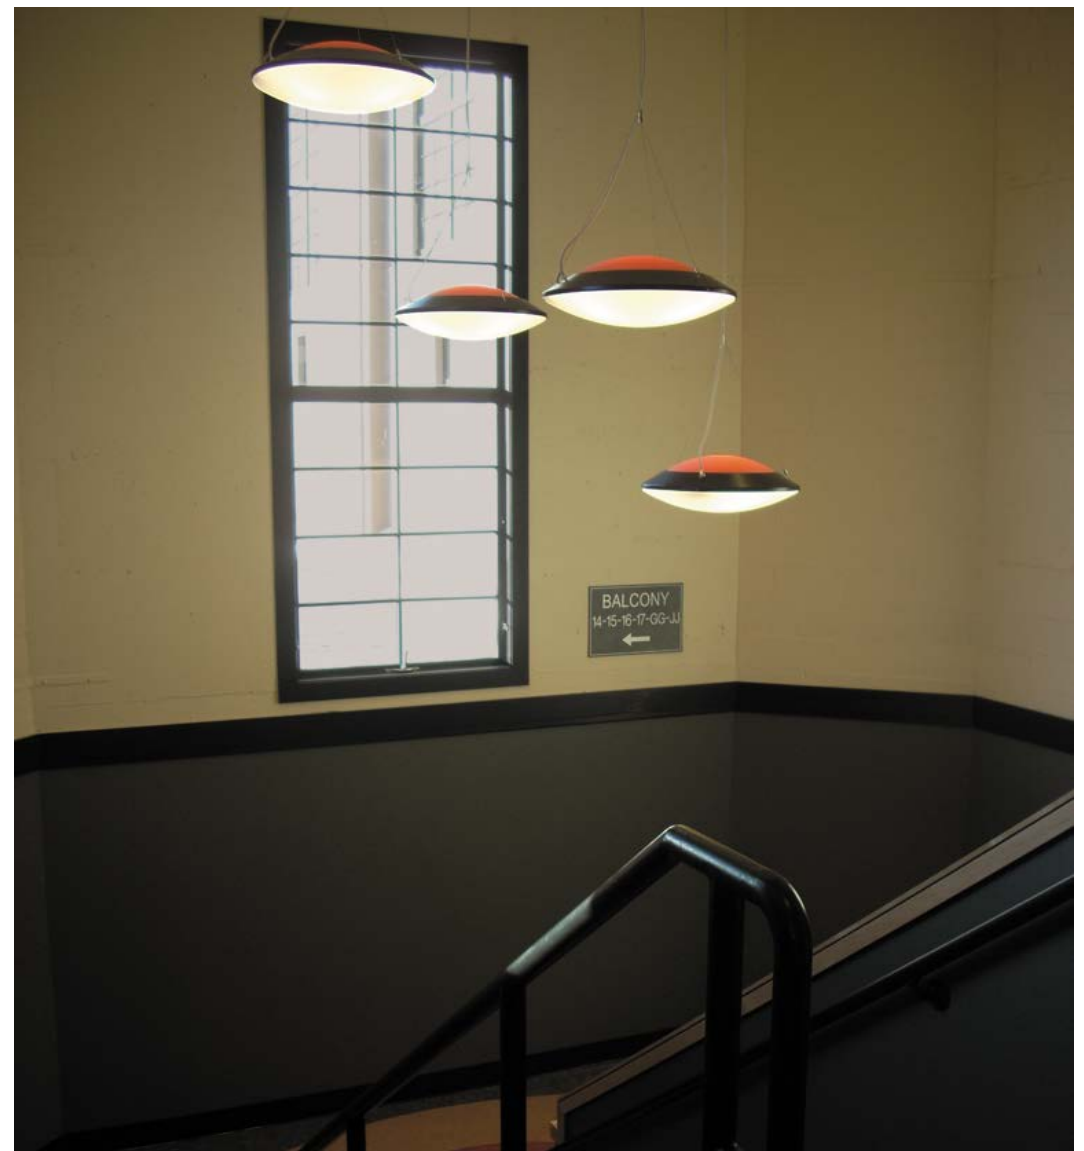

construction


integral programmable drivers, constant current, field maintainable, universal input (120-277), 0-10v controllable to 1% dimming.

precision CNC spun .063" aluminum housing w/ rolled bottom edge for added strength

.050" aluminum array optics platform painted in high reflectance (>92%) matte white powder coat

subtle glow from .125" thick colored acrylic top dome in one of four colors: blue, orange, red, or white

5" dia. spun steel canopy w/ field adjustable stainless steel cables allowing for exact desired mounting height, sloped ceiling adapter standard

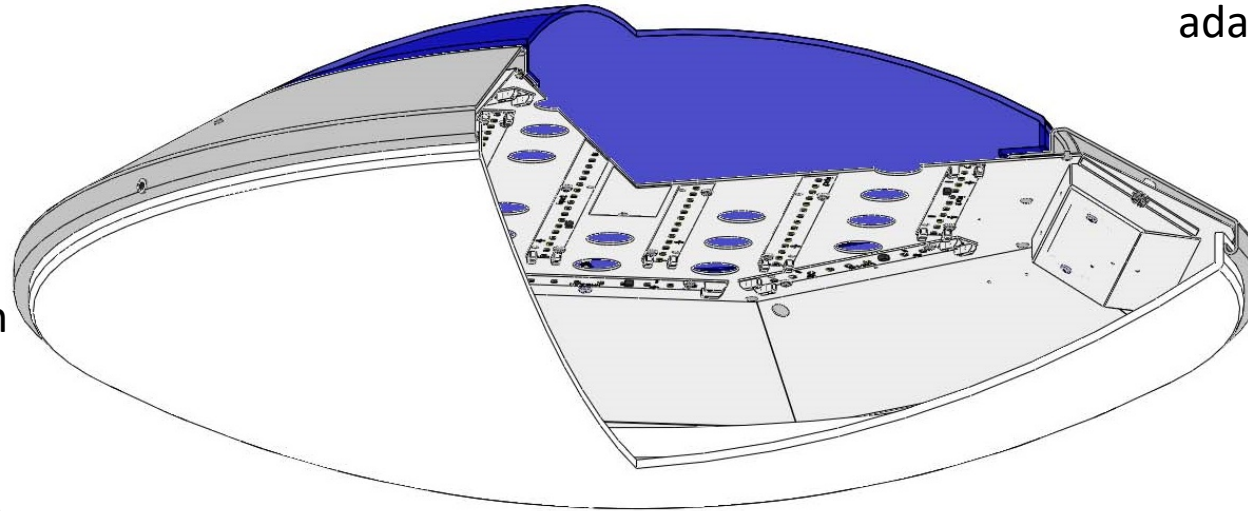

21 standard powder coat paint finishes + custom RAL colors


metal core LED boards mechanically held in place for simple field maintenance

bottom dome diffuser made from virgin matte white acrylic, secured by allen key set screws recessed into trim ring

performance

Statistics


Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
maxx	+	46.3 fc	56.9 fc	39.3 fc	1.4:1	1.2:1

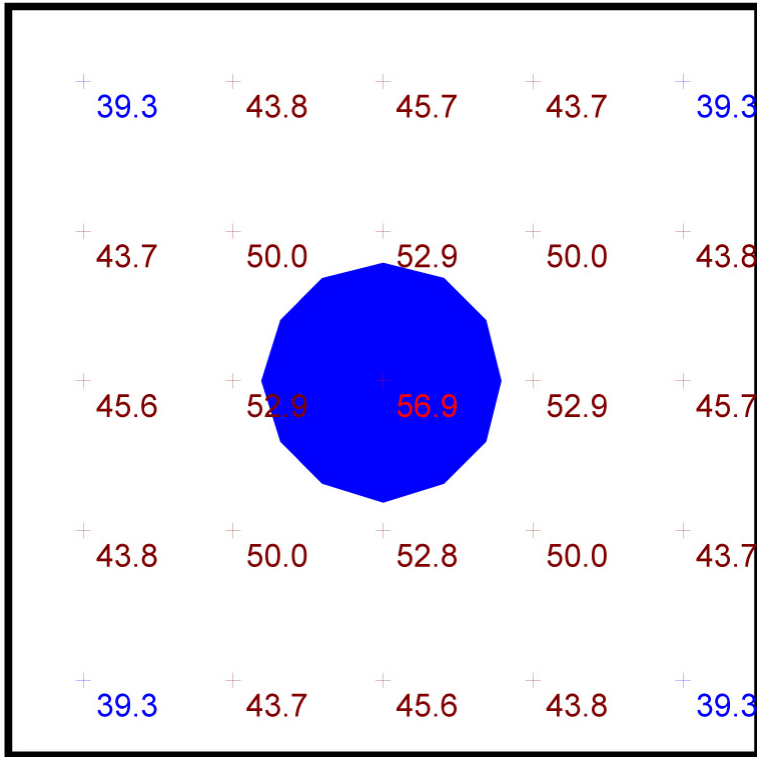

Plan View
Scale - 1" = 2ft

- 10' x 10' x 14'H space
- 80/50/20 reflectances
- bottom of fixture at 12' aff
- FC readings at 2.5' aff
- layout conducted using P7738 HI output (13370 delivered lumens)



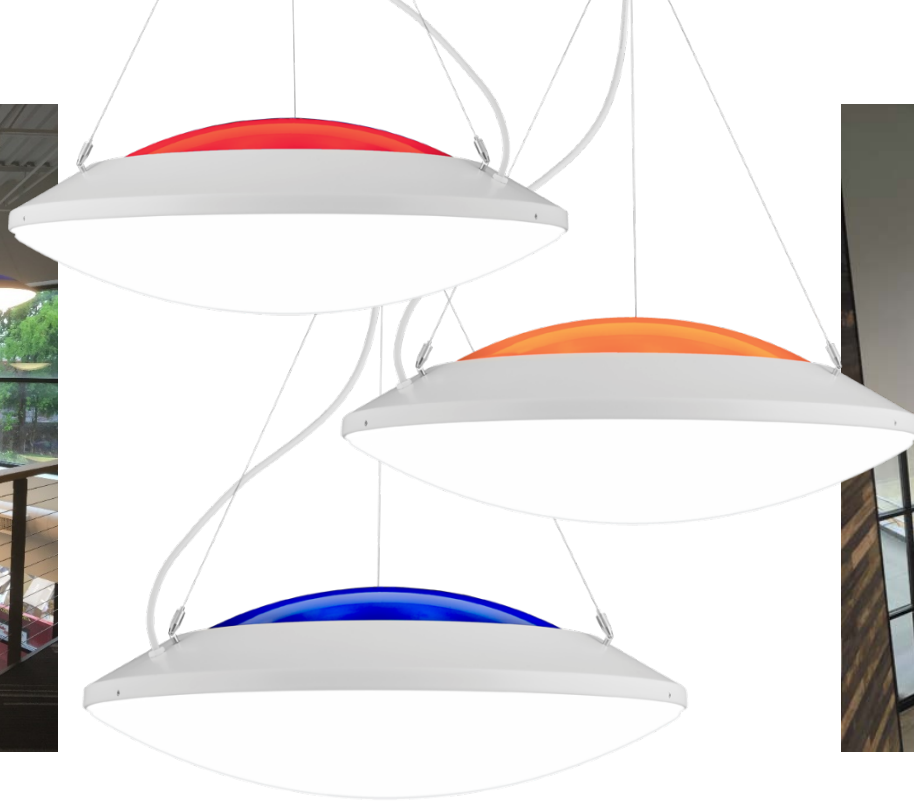

www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

maxx™ 5-slider

