

job name:   
 type:

## 26" wht.wal™ spec sheet 90CRI

### material

**trim ring**  
 precision CNC spun .063" aluminum. rolled bottom edge for added strength.

**diffuser**  
 .125" virgin white acrylic bottom/inner lens.

### optics

**reflector**  
 .050" aluminum array platform powder coat painted high reflectance (>92%) matte white.

### LED

custom LED board in 3000K, 3500K, or 4000K (90+ cri standard) under normal operating conditions, the LEDs employed are rated for >50,000hrs L70 (6.8K) per IES TM-21 from LM-80 test data. select power cord color below.

### driver

integral, programmable, UL class P, class 2, universal input (120-277v), constant current, 0-10v dimming, 1% minimum dimming level, PF >.9, THD <20%, protections include open and short circuit, overload and over temperature.

### mounting

5"dia. spun steel canopy in satin white. four point vertical suspension of stainless steel cables attach to trim with field adjustable grippers that allow for exact AFF mounting heights. optional quadpod to single point cable suspension, with sloped ceiling adapter. select cable length under options.

### emergency


recommend use of inverter (by other)  
 optional WREM: wired for remote EM battery (by other). 2nd power cord required.



## catalog number

--	--	--	--	--	--

size	CCT	lumens	painting finish	power cord	options
<b>P6326</b> (2ft) 26"dia X 4"ht <small>see page 2 &amp; 3 for info on P6338 and P6348</small>	<b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	<b>LO</b> 2620 lm <b>HI</b> 4890 lm <b>CL</b> xxxx lm <small>custom lumens consult factory (1310 lm - 4890 lm)</small>	<b>AP</b> anodized paint <b>BS</b> brass <b>BU</b> blue <b>BZ</b> bronze <b>CP</b> champagne <b>FB</b> flat black <b>GM</b> gun metal <b>MB</b> military blue <b>MW</b> matte white <b>OR</b> orange <b>RD</b> red <b>SB</b> satin black <b>SS</b> satin silver <b>TG</b> textured gray <b>YO</b> yellow  <b>premium finish</b> <b>RAL</b> specify RAL#	<b>WHPC</b> white power cord and canopy  <b>BKPC</b> black power cord and canopy  <b>SBPC</b> silver braid power cord and white canopy	<b>6FT</b> 72" cables <b>12FT</b> 144" cables <b>QPD</b> Quadpod hanging system <small>choose suspension length above when selecting -QPD</small> <b>WREM</b> wired for remote EM battery pack <small>(by other) (see note above)</small> <b>ELD</b> EldoLED* <b>LUT</b> Lutron* <small>*consult factory</small>



job name:   
 type:

## 38" wht.wal™ spec sheet 90CRI

### material

**trim ring**  
 precision CNC spun .063" aluminum. rolled bottom edge for added strength.

**diffuser**  
 .125" virgin white acrylic bottom/inner lens.

### optics

**reflector**  
 .050" aluminum array platform powder coat painted high reflectance (>92%) matte white.

### LED

custom LED board in 3000K, 3500K, or 4000K (90+ cri standard) under normal operating conditions, the LEDs employed are rated for >50,000hrs L70 (6.8K) per IES TM-21 from LM-80 test data. select power cord color below.

### driver

integral, programmable, UL class P, class 2, universal input (120-277v), constant current, 0-10v dimming, 1% minimum dimming level, PF >.9, THD <20%, protections include open and short circuit, overload and over temperature.

### mounting

5"dia. spun steel canopy in satin white. four point vertical suspension of stainless steel cables attach to trim with field adjustable grippers that allow for exact AFF mounting heights. optional quadpod to single point cable suspension, with sloped ceiling adapter. select cable length under options.

### emergency


recommend use of inverter (by other)  
 optional WREM: wired for remote EM battery (by other). 2nd power cord required.



## catalog number

--	--	--	--	--	--

size	CCT	lumens	painting finish	power cord	options
<b>P6338</b> (3ft) 38"dia X 5.5"ht <small>see page 3 for info on P6348</small>	<b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	<b>LO</b> 2955 lm <b>HI</b> 6140 lm <b>CL</b> xxxx lm <small>custom lumens consult factory (1750 lm - 6140 lm)</small>	<b>AP</b> anodized paint <b>BS</b> brass <b>BU</b> blue <b>BZ</b> bronze <b>CP</b> champagne <b>FB</b> flat black <b>GM</b> gun metal <b>MB</b> military blue <b>MW</b> matte white <b>OR</b> orange <b>RD</b> red <b>SB</b> satin black <b>SS</b> satin silver <b>TG</b> textured gray <b>YO</b> yellow  <b>premium finish</b> <b>RAL</b> specify RAL#	<b>WHPC</b> white power cord and canopy <b>BKPC</b> black power cord and canopy <b>SBPC</b> silver braid power cord and white canopy	<b>6FT</b> 72" cables <b>12FT</b> 144" cables <b>QPD</b> Quadpod hanging system <small>choose suspension length above when selecting -QPD</small> <b>WREM</b> wired for remote EM battery pack <small>(by other) (see note above)</small> <b>ELD</b> EldoLED* <b>LUT</b> Lutron* <small>*consult factory</small>



job name:   
 type:

# 48" wht.wal™ spec sheet 90CRI

**material**

**trim ring**  
 precision CNC spun .063" aluminum. rolled bottom edge for added strength.  
**diffuser**  
 .125" virgin white acrylic bottom/inner lens.

**optics**

**reflector**  
 .050" aluminum array platform powder coat painted high reflectance (>92%) matte white.

**LED**

custom LED board in 3000K, 3500K, or 4000K (90+ cri standard) under normal operating conditions, the LEDs employed are rated for >50,000hrs L70 (6.8K) per IES TM-21 from LM-80 test data. select power cord color below.

**driver**

integral, programmable, UL class P, class 2, universal input (120-277v), constant current, 0-10v dimming, 1% minimum dimming level, PF >.9, THD <20%, protections include open and short circuit, overload and over temperature.

**mounting**

5"dia. spun steel canopy in satin white. four point vertical suspension of stainless steel cables attach to trim with field adjustable grippers that allow for exact AFF mounting heights. optional quadpod to single point cable suspension, with sloped ceiling adapter. select cable length under options.

**emergency**

recommend use of inverter (by other)  
 optional WREM: wired for remote EM battery (by other). 2nd power cord required.





## catalog number

--	--	--	--	--	--

size	CCT	lumens	painting finish	power cord	options
<b>P6348</b> (4ft) 48"dia X 7"ht	<b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	<b>LO</b> 5040 lm <b>HI</b> 8250 lm <b>CL</b> xxxx lm <small>custom lumens consult factory (2160 lm - 8250 lm)</small>	<b>AP</b> anodized paint <b>BS</b> brass <b>BU</b> blue <b>BZ</b> bronze <b>CP</b> champagne <b>FB</b> flat black <b>GM</b> gun metal <b>MB</b> military blue <b>MW</b> matte white <b>OR</b> orange <b>RD</b> red <b>SB</b> satin black <b>SS</b> satin silver <b>TG</b> textured gray <b>YO</b> yellow	<b>WHPC</b> white power cord and canopy <b>BKPC</b> black power cord and canopy <b>SBPC</b> silver braid power cord and white canopy	<b>6FT</b> 72" cables <b>12FT</b> 144" cables <b>QPD</b> Quadpod hanging system <small>choose suspension length above when selecting -QPD</small> <b>WREM</b> wired for remote EM battery pack <small>(by other) (see note above)</small> <b>ELD</b> EldoLED* <b>LUT</b> Lutron* <small>*consult factory</small>


**premium finish**  
**RAL** specify RAL#



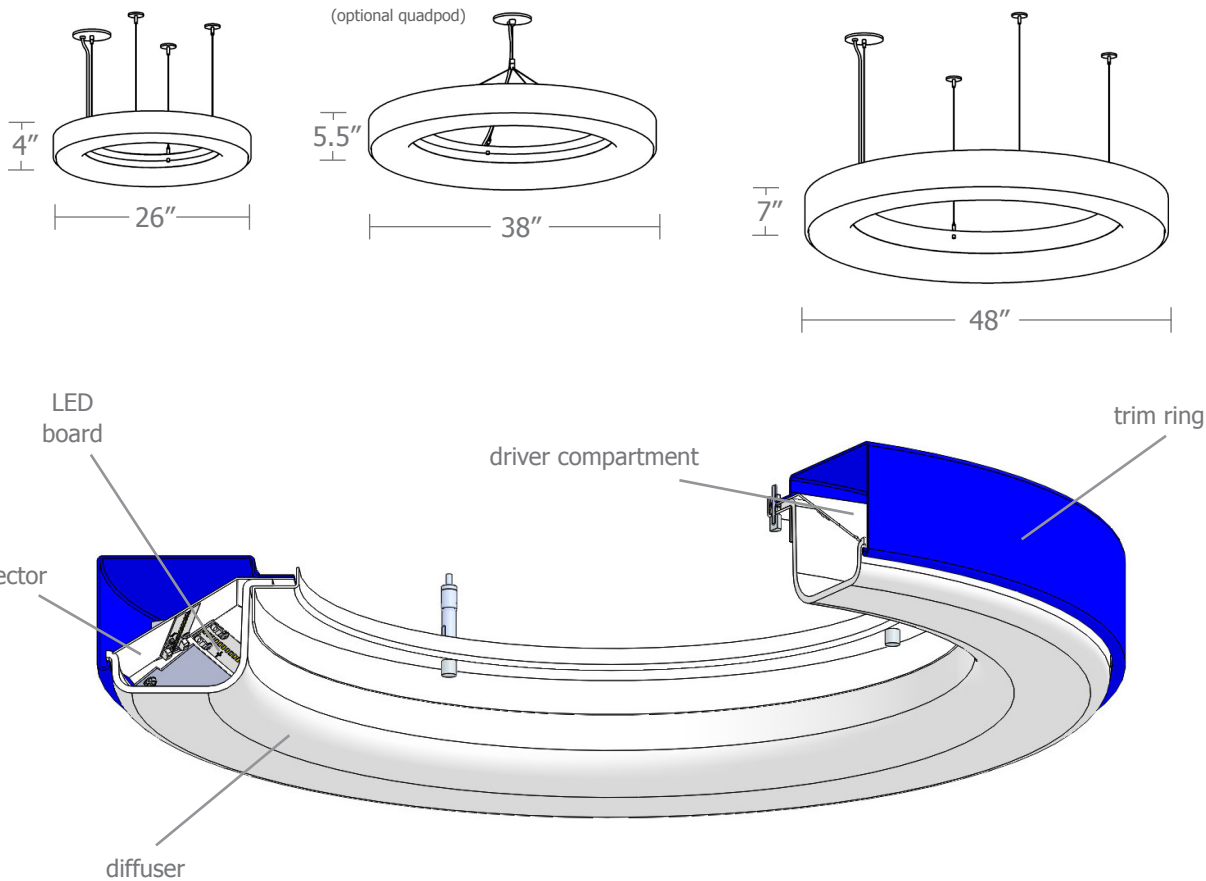


Typical Lighting Layout

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
wht.wal pendant	+	27.5 fc	33.1 fc	23.3 fc	1.4:1	1.2:1

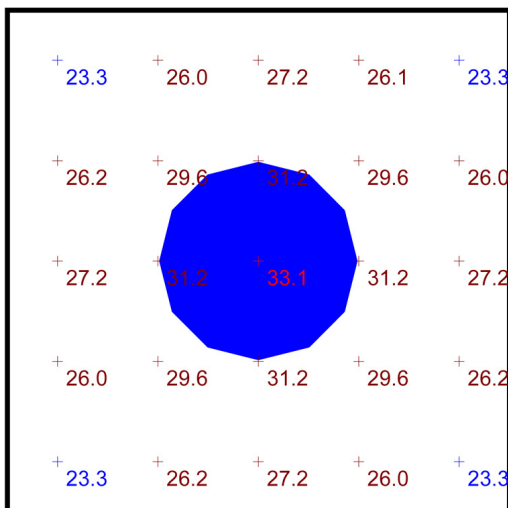

Plan View  
Scale - 1" = 2ft


- 10' x 10' x 14'H space
- 80/50/20 reflectances
- bottom of fixture at 12' aff
- FC readings at 2.5' aff
- layout conducted using 48" dia. HI lumen package (8250 delivered lumens)




## Calculation Table

The application of a Light Loss Factor is required to:


- match the lumen output for the power module specified
- incorporate the increased lumen output due to LED/Driver upgrades



**19611**  
P6326




**19185**  
P6338




**19188**  
P6348

Cat No	Delivered* Lumens	Watts 120V / 277V	IES File #	LLF to be applied
<b>P6326 LO</b>	2620	31	19611	0.59
<b>P6326 HI</b>	4890	62	19611	1.10
<b>P6338 LO</b>	2955	36	19185	0.58
<b>P6338 HI</b>	6140	78	19185	1.20
<b>P6348 LO</b>	5040	61	19188	0.86
<b>P6348 HI</b>	8250	104	19188	1.40

\*delivered lumens based on 4000K, 90+ cri



## Powder Coat Paint Finishes



**MW** matte white



**AP** anodized paint



**SS** satin silver



**TG** textured gray




**FB** flat black



**SB** satin black



**CP** champagne

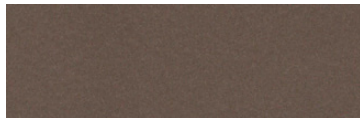

**BZ** bronze



**GM** gun metal



**OR** orange 2011



**BU** blue 5017



**BS** brass



**RD** red 3020



**YO** yellow 1018



**MB** military blue

For accurate color verification, actual finish samples are available upon request.

## Premium Finishes\*



**RAL#**

\*Available on select series. Consult product submittal for availability.

