impulse[™] specifications

sizes

P2126 26"dia. x 4"ht.

P2138 38"dia. x 5.5"ht.

P2148 48"dia. x 7"ht.

material

trim ring

precision CNC spun .063" aluminum. rolled top edge for added strength and recessed diffuser plane eliminates visible mounting hardware.

diffuser

.125" virgin matte white acrylic donut.

luminous accent disc

.125" gloss acrylic available in a variety of translucent colors.

optics

reflector

segmented 22 gauge aluminum painted powder coat white.

.187" prismatic acrylic truncated cone provides debris-free diffuser illumination.

electrical


pre-wired for dual circuit with factory installed, thermally protected, class P, electronic fluorescent ballasts for virtually all lamping choices. see submittal at www.**impact**ltg.com for a current listing of lamping and control options. white power cord is standard with other color options listed on the submittal.

mounting

5"dia. spun steel canopy in satin white with sloped ceiling adapter. single 12' stainless steel cable connects to field adjustable collector, an array of cables branch off and attach to reflector with adjustable grippers, cable system allows for exact AFF mounting heights.

finish

select from standard powder coat paint finishes or brushed aluminum or specify RAL# for custom colors.

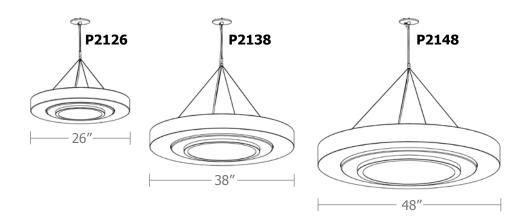


















impulse™

24 www.**impact**ltg.com | 314.427.1212 | saint louis, mo

Powder Coat Paint Finishes



For accurate color verification, actual finish samples are available upon request.

Premium Finish



BA brushed aluminum Available on select series. Consult product pages for availability. RAL#

