magnum ii™ specifications

sizes

P1426 26"dia. x 5.75"ht. **P1438** 38"dia. x 7.75"ht.

material

trim ring

precision CNC spun .063" aluminum. rolled top edge for added strength and recessed diffuser plane eliminates visible mounting hardware.

diffuser

.125" virgin matte white acrylic donut.

luminous truncated cone

.125" gloss acrylic in cobalt blue or .187" pattern 12 clear prismatic.

finc

water jet trimmed .25" aluminum bar stock with brushed finish.

optics

reflector

segmented 22 gauge aluminum painted powder coat white.

refractor

.187" prismatic acrylic truncated cone provides debris-free diffuser illumination.

electrical


pre-wired for dual circuit with factory installed, thermally protected, class P, electronic fluorescent ballasts for virtually all lamping choices. see submittal at www.**impact**ltg.com for a current listing of lamping and control options. white power cord is standard with other color options listed on the submittal.

mounting

5"dia. spun steel canopy in satin white with sloped ceiling adapter. single 12' stainless steel cable connects to field adjustable collector. an array of cables branch off and attach to reflector with adjustable grippers. cable system allows for exact AFF mounting heights.


finish

select from standard powder coat paint finishes or brushed aluminum or specify RAL# for custom colors.

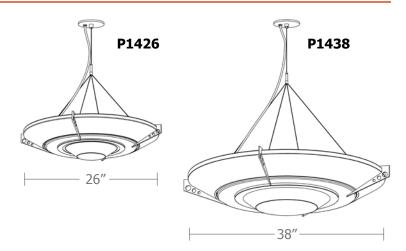











magnum ii™

www.**impact**ltg.com | 314.427.1212 | saint louis, mo

Powder Coat Paint Finishes



For accurate color verification, actual finish samples are available upon request.

Premium Finish





BA brushed aluminum Available on select series. Consult product pages for availability.

RAL#

