wāf.r™ specifications

sizes

P5526 26"dia. x 5"ht. **P5538** 38"dia. x 6"ht.

P5548 48"dia. x 7"ht.

material

trim ring

precision CNC spun .063" aluminum. rolled bottom edge for added strength.

diffuser

.187" virgin matte white acrylic lens held in place with allen key set screws recessed into trim ring.

optics

reflector

segmented 22 gauge aluminum reflector painted powder coat white.

electrical


pre-wired for single circuit with factory installed, thermally protected, class P, electronic fluorescent ballasts for virtually all lamping choices. see submittal at www.**impact**ltg.com for a current listing of lamping and control options. white power cord is standard with other color options listed on the submittal.

mounting

5"dia. spun steel canopy in satin white. four point vertical suspension of 12 ft long stainless steel cables attach to trim with field adjustable grippers that allow for exact AFF mounting heights. optional quadpod to single point cable suspension.

finish

select from standard powder coat paint finishes or brushed aluminum or specify RAL# for custom colors.

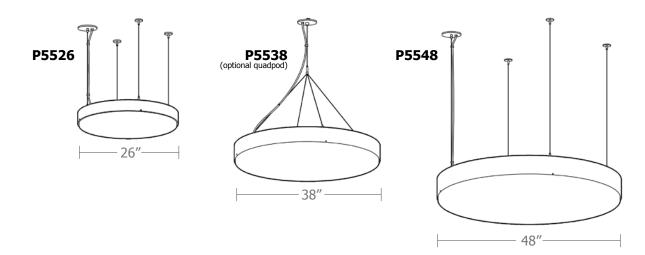





wāf.r™

74













www.**impact**ltg.com | 314.427.1212 | saint louis, mo

Powder Coat Paint Finishes



For accurate color verification, actual finish samples are available upon request.

Premium Finish



BA brushed aluminum Available on select series. Consult product pages for availability. RAL#

