




bul.it.XL™ 5-slider

your lighting rep has
recommended the **bul.it.XL™**
pendant for your project
Let's take a quick look:



sizes and lumens

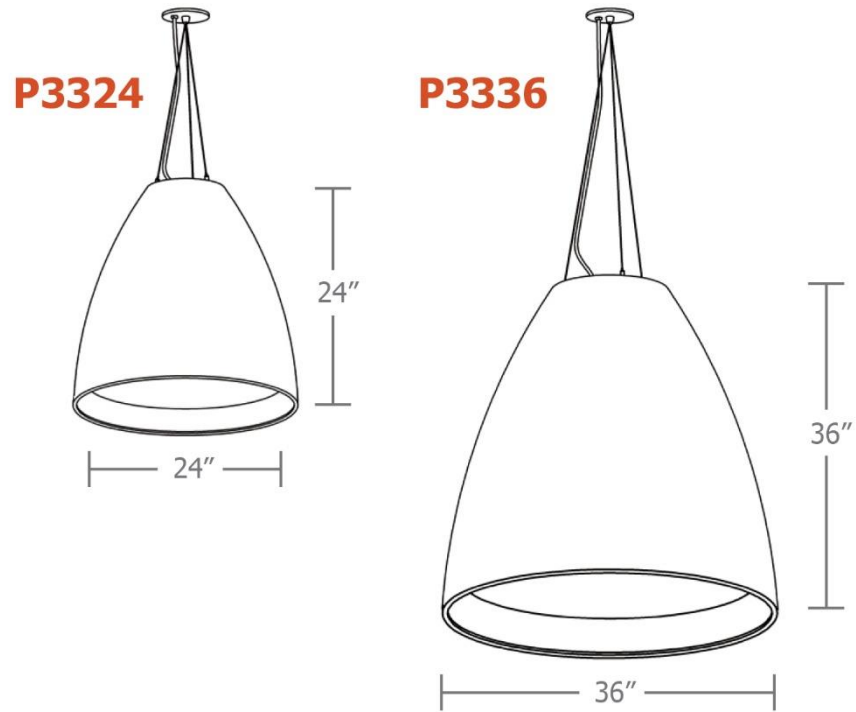

- P3324 (24") / 2000 – 5600 lm
- P3336 (36") / 2000 – 5600 lm



construction


integral programmable driver, universal input (120-277v), field maintainable, 0-10v controllable to 1% dimming.

5" dia. spun steel canopy with field adjustable tripod stainless steel cables

(POC) power over cable suspension system option provides a clean look without the need for a separate power cord

(supersized) when specifying, please consider the fact that 36" unit will not fit through a standard door. **min. 42" opening** required

.050" spun aluminum conical reflector optics chamber finished in high reflectance (>92%) matte white powder coat

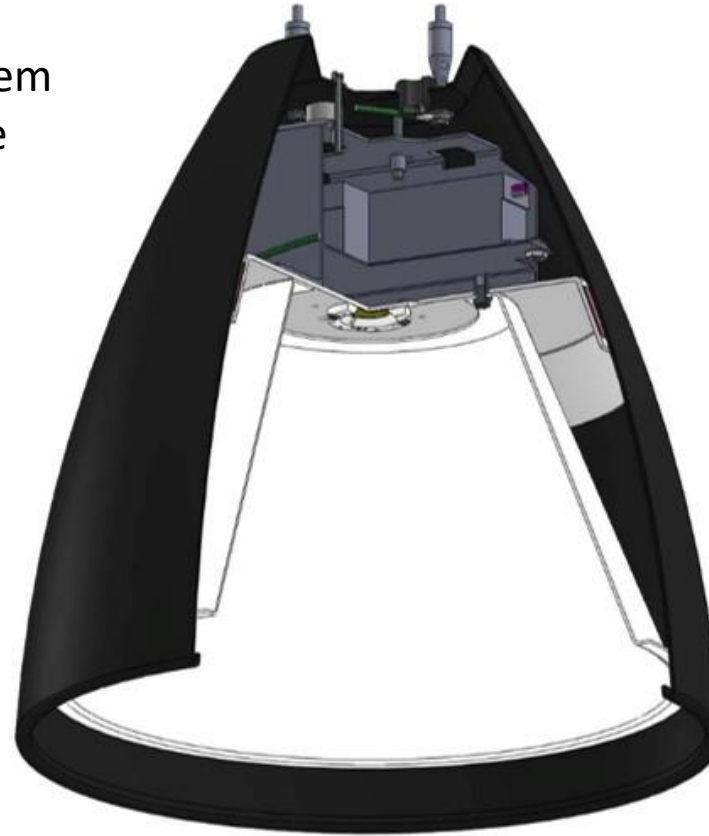

optional colored cloth power cord in blue, orange purple, red, or white/gray dot


single COB LED module in **90+ CRI** standard
3000K, 3500K and 4000K

precision CNC spun .080" aluminum parabolic housing with bottom edge for added strength


open bottom, frosted acrylic flat lens, or open with decorative colored ring in amber, blue, frost, green, red, or yellow

15 standard powder coat paint finishes + custom RAL colors

performance

Schedule						
Symbol	Quantity	Manufacturer	Catalog Number	Description	Lamp	Wattage
	1	Impact Architectural Lighting	P3336 40HX	36" dia. pendant bul.it.XL luminaire w/ open bottom	4000k 90cri LED	63


Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
bul.it.XL	+	29.7 fc	46.3 fc	15.9 fc	2.9:1	1.9:1

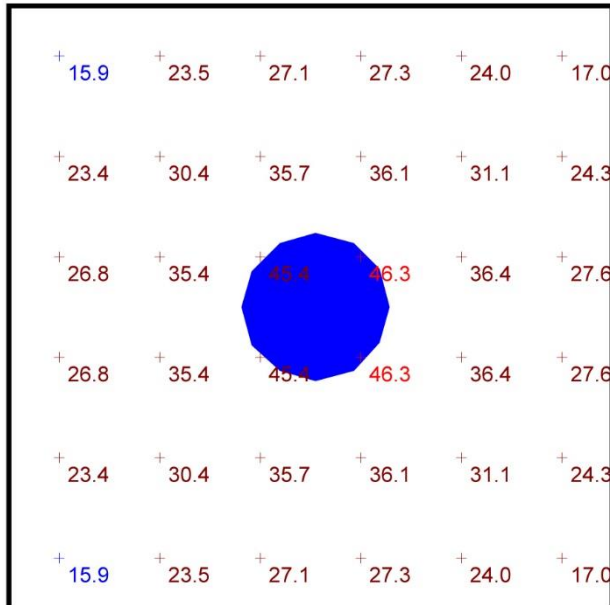

Plan View
Scale - 1" = 2ft

- 12' x 12' x 20'H space
- 80/50/20 reflectances
- bottom of fixture at 14' aff
- FC readings at 2.5' aff
- layout conducted using P3336 HX output 90 cri (5600 delivered lumens)



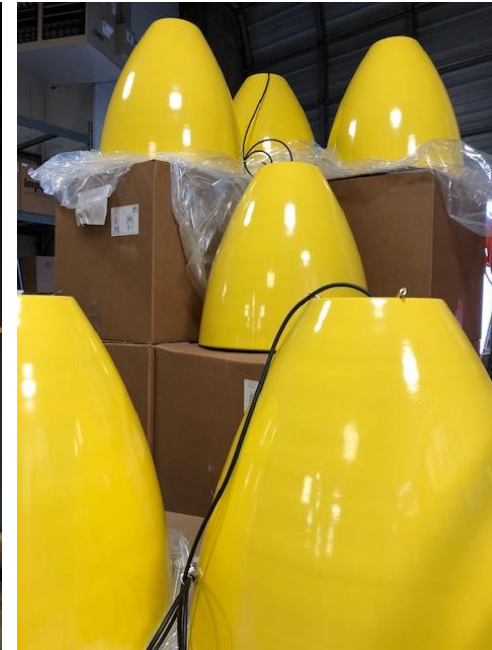

www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

bul.it.XL™ 5-slider

