




str.8™ 5-slider

your lighting rep has
recommended the **str.8™**
cylinder pendant for your project
Let's take a quick look:




sizes and lumens


P7506

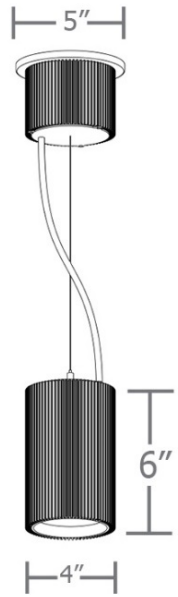

P7512

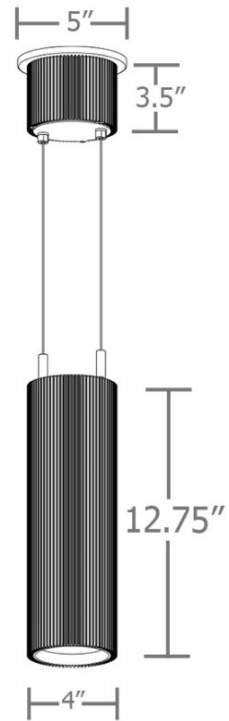

- P7506 (06") / 450 – 3000 lm
- P7512 (12") / 450 – 3000 lm

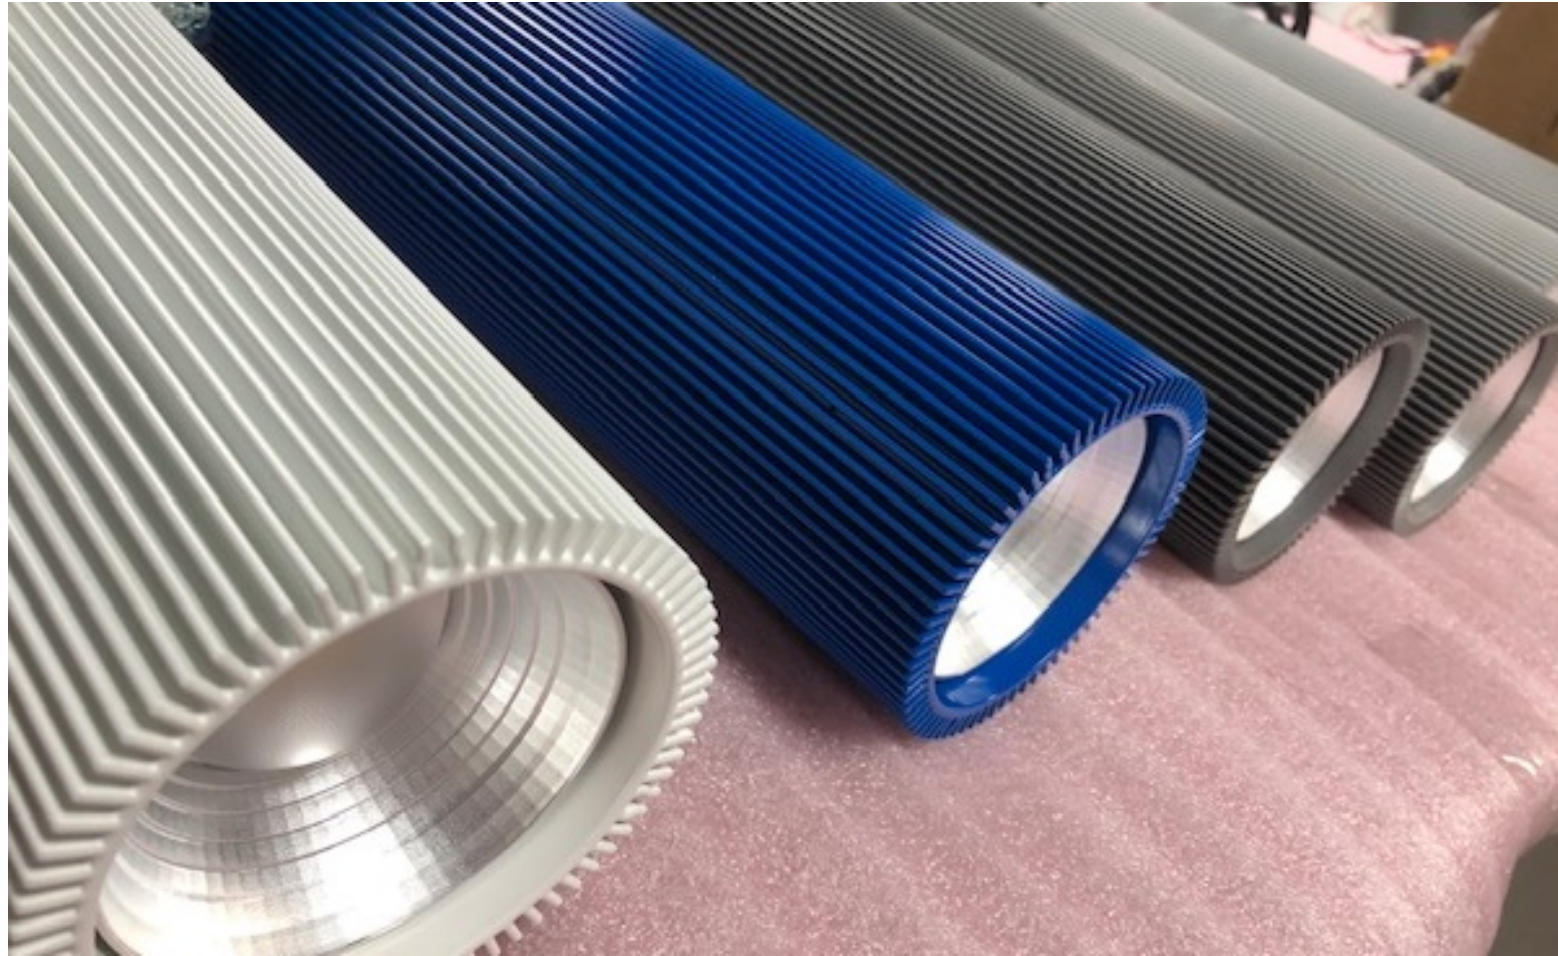


construction

canopy mounted driver, constant current, field maintainable, universal input (120-277v), 0-10v controllable to 5% dimming.

(POC) power over cable suspension system option provides a clean look without the need for a separate power cord

COB light engine in 80+ CRI standard or optional 90 CRI.
2700K, 3000K, 3500K and 4000K.

4" dia. ribbed extruded aluminum outer housing

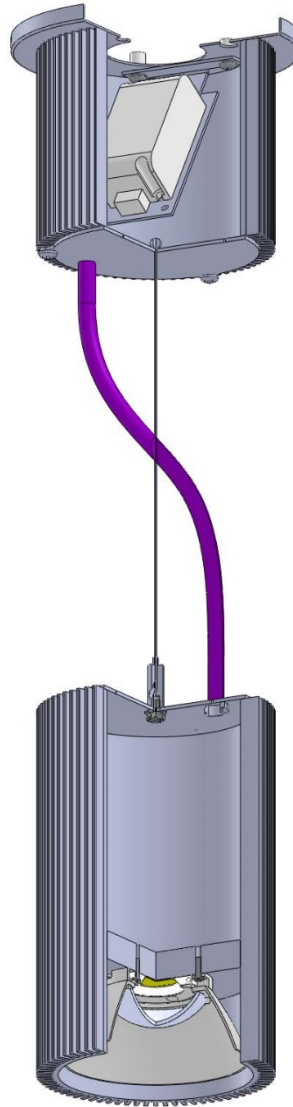

optional color cloth power cord (**shown here**), available in blue, orange, purple, red or white & gray dot

extruded aluminum driver canopy, painted to match fixture, holds stainless steel ultra-thin cable with field adjustable micro-gripper allowing for exact aff mounting


available in 2 anodized finishes, 18 standard powder coat finishes + custom RAL colors

field changeable downlight optics: 20° (spot), 30° (med), 50° (wide), 90° (extra wide) reflector with color mixing dome.

performance

Statistics

Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
str.8	+	24.6 fc	53.8 fc	13.2 fc	4.1:1	1.9:1

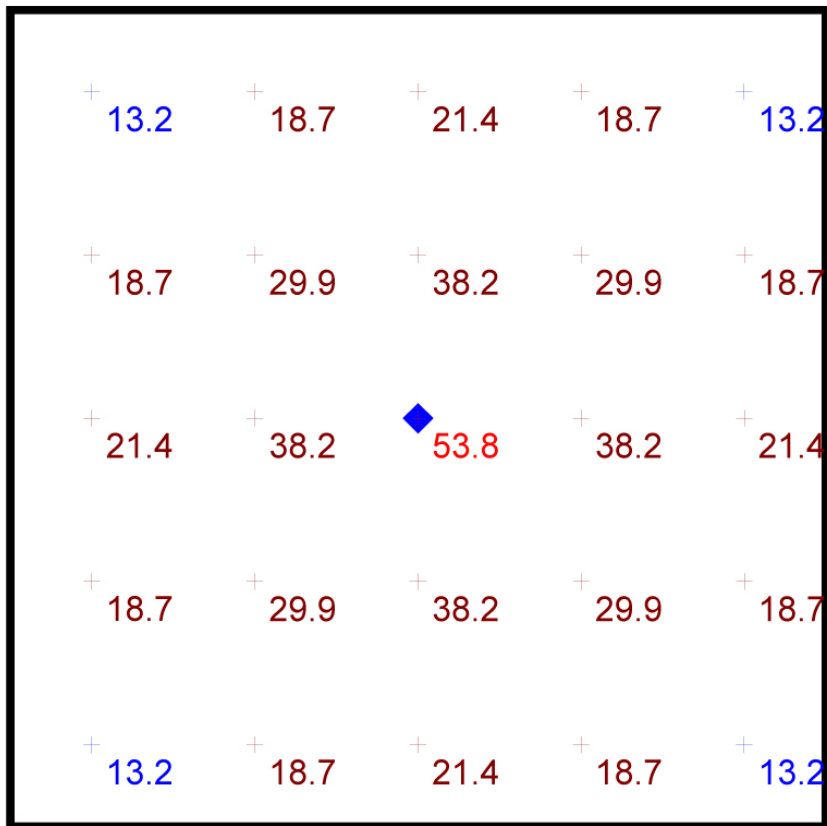


Plan View

Scale - 1" = 2ft

str.8™ 5-slider

- 10' x 10' x 14'H space
- 80/50/20 reflectances
- bottom of fixture at 10' aff
- FC readings at 2.5' aff
- layout conducted using P7506-W (H3) output 3000 delivered lumens w/ 50° beam spread



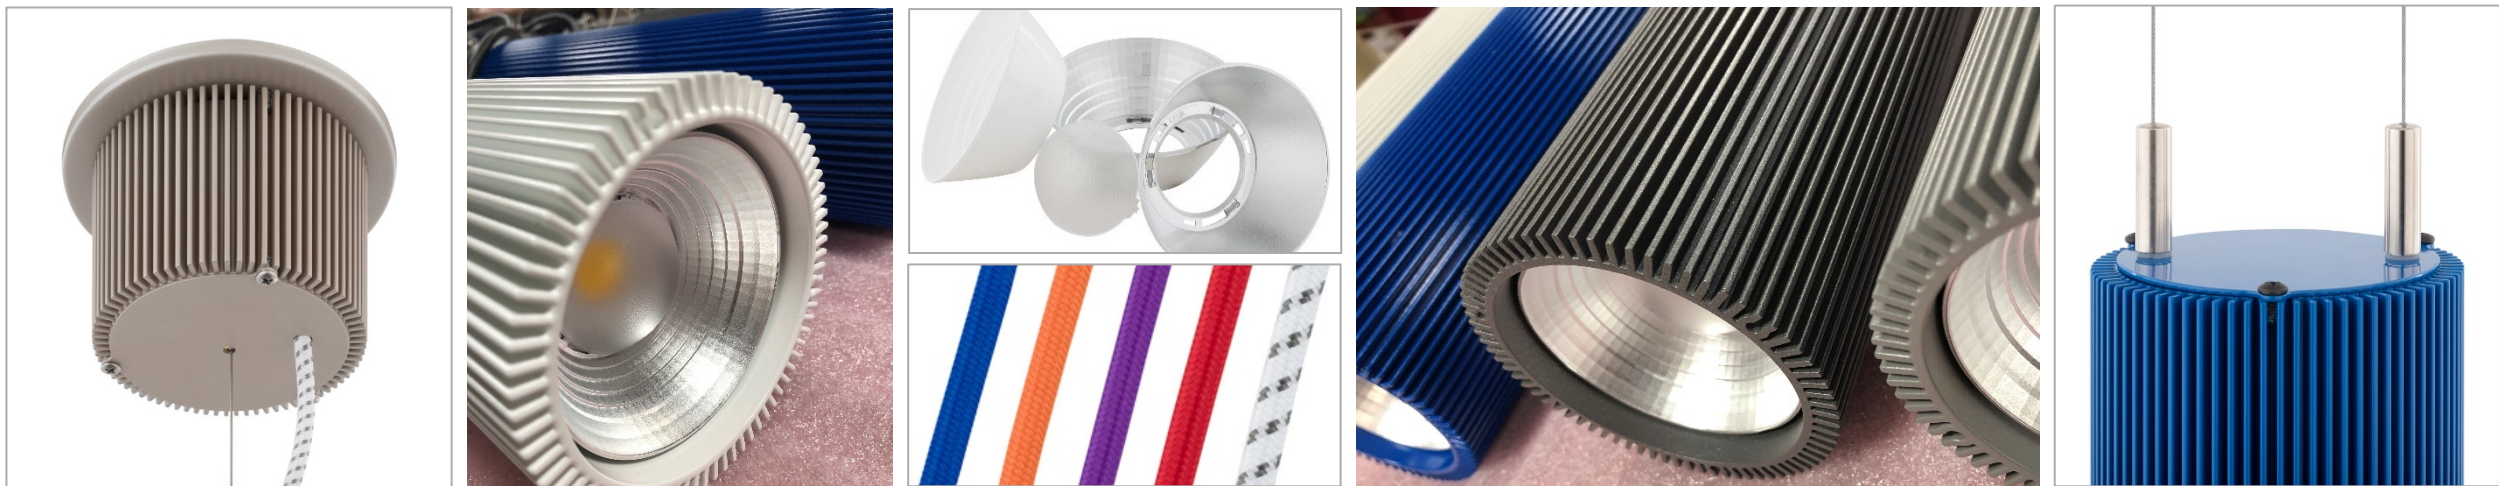

www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

str.8™ 5-slider

