



ceiling mount
str8™ 5-slider



your lighting rep has recommended
the **ceiling mount str.8™** cylinder
downlight for your project
Let's take a quick look:



sizes and lumens

C7506

C7512

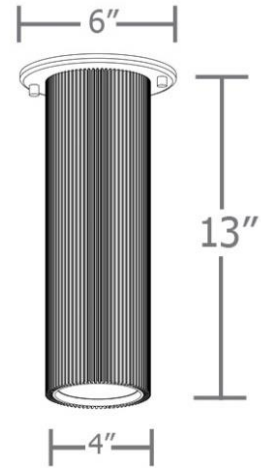

- C7506 (06") / 395 – 2780 lm
- C7512 (12") / 395 – 2780 lm



ceiling mount
str8™ 5-slider



construction

integral, constant current driver, field maintainable, universal input (120-277v), 0-10v controllable to 5% dimming.

COB LED in 2700K, 3000K, 3500K, 4000K, **90+ CRI** standard

complementary pendant mount version available



6" dia. canopy flange mounts directly to 4" octagon j-box

*when specifying (H3) 3000 lumen package for 6" length, a "deep" j-box is required

4" dia. ribbed extruded aluminum outer housing

2 anodized finishes, 12 standard powder coat paint finishes + custom RAL colors



field changeable downlight optics:
20° (spot), 30° (med), 50° (wide),
90° (extra wide)

ceiling mount
str8™ 5-slider



performance

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
str8.ceiling mount	+	26.9 fc	47.6 fc	20.3 fc	2.3:1	1.3:1

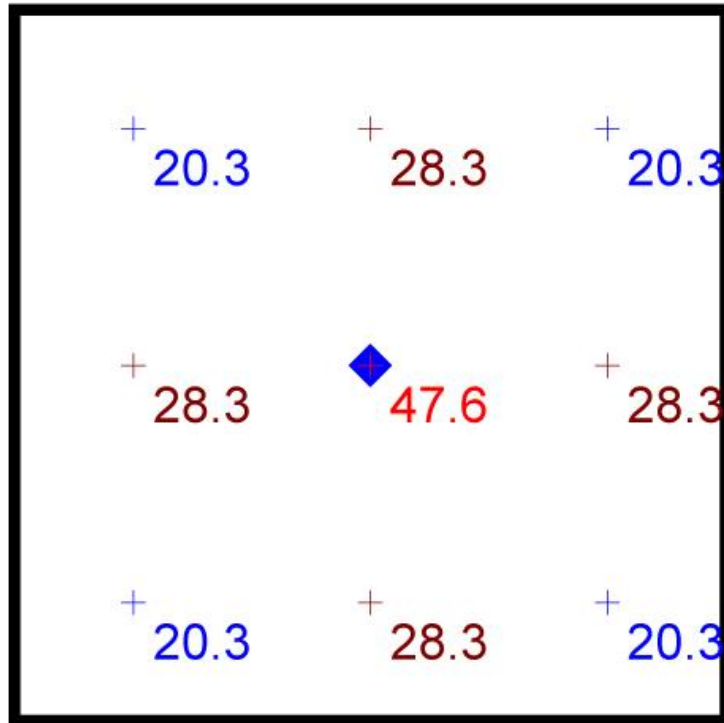
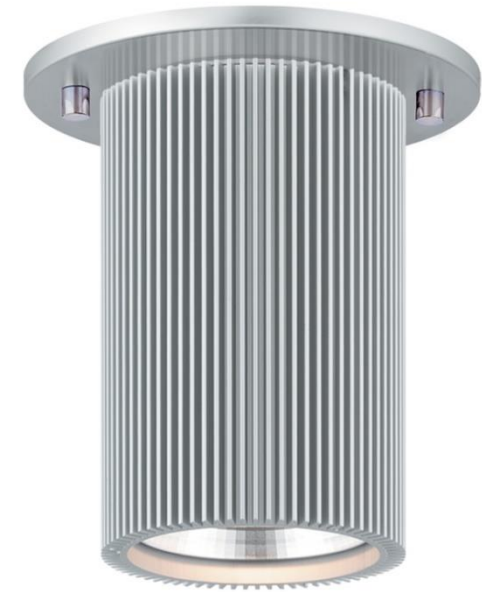


Plan View
Scale - 1" = 2ft

- 6' x 6' x 9'H space
- 80/50/20 reflectances
- bottom of fixture at 8' aff
- FC readings at 2.5' aff
- layout conducted using 12" length unit with 90 CRI (H1) 1390 lumen package w/ wide dist.

ceiling mount
str8™ 5-slider



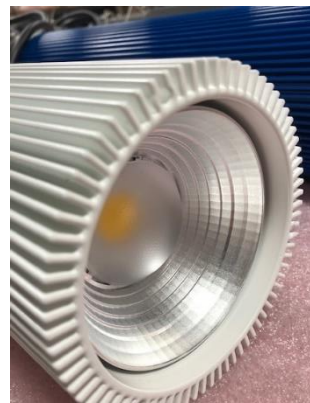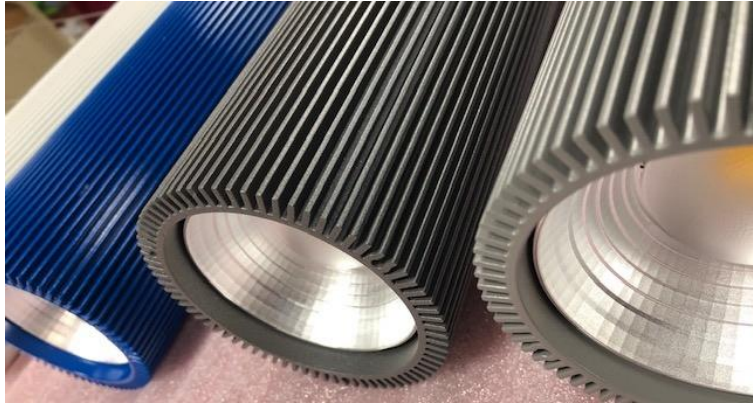

www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

ceiling mount
str8™ 5-slider

