




ceiling mount
na.row™ 5-slider

your lighting rep has recommended
the ceiling mount **na.row™**
cylinder downlight for your project
Let's take a quick look:

sizes and lumens

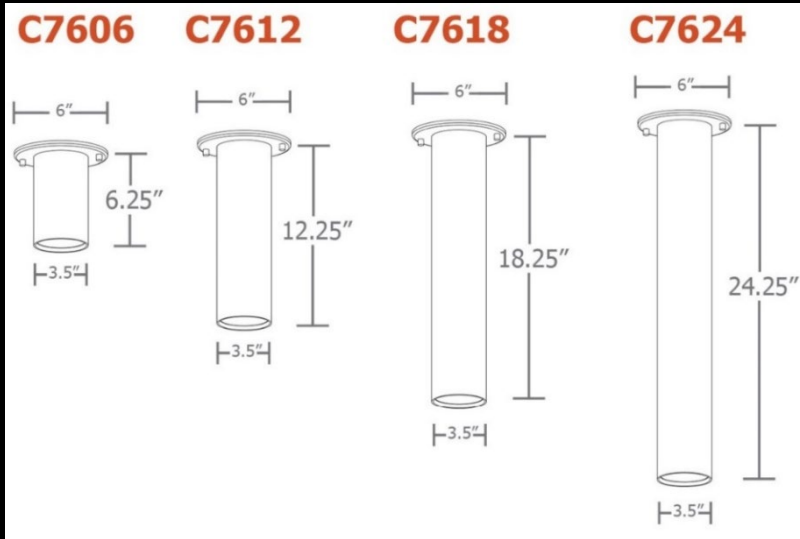


- C7606 (06") / 395 – 2780 lm
- C7612 (12") / 395 – 2780 lm
- C7618 (18") / 395 – 2780 lm
- C7624 (24") / 395 – 2780 lm



construction

integral, constant-current driver,
field maintainable, universal input
(120-277v), 0-10v controllable to 5%
dimming

COB LED in 2700K,
3000K, 3500K, 4000K
90+ CRI standard

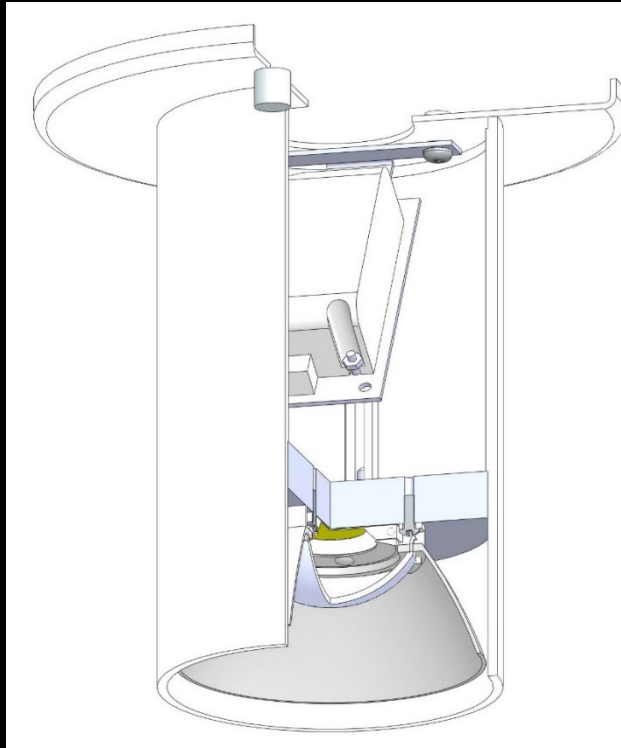

6" dia. canopy flange mounts
directly to 4" octagon j-box

*when specifying (H3) 2780
lumen package for 6" length, a
"deep" j-box is required

3.5" dia smooth extruded
aluminum outer housing

15 standard powder
coat painted finishes
+ custom RAL colors


field changeable downlight optics:
20° (spot), 30° (med), 50° (wide),
90° (extra wide)

ceiling mount
na.row™ 5-slider



performance

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
na.row.ceiling	+	26.9 fc	47.6 fc	20.3 fc	2.3:1	1.3:1

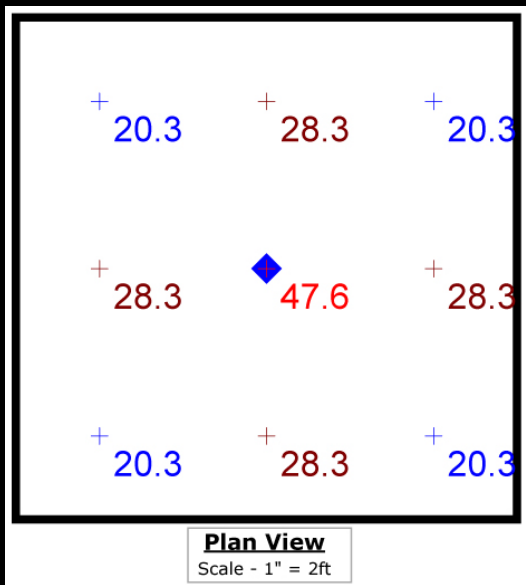

- 6' x 6' x 9'H space
- 80/50/20 reflectances
- bottom of fixture at 8' aff
- FC readings at 2.5' aff
- layout conducted using 12" length unit with 90 CRI, wide dist. H1 1390 lumen package



ceiling mount
na.row™ 5-slider



www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

ceiling mount
na.row™ 5-slider

