




str.8.up™ 5-slider

your lighting rep has
recommended the **str.8.up™**
cylinder pendant for your project
Let's take a quick look:




sizes and lumens

P7506.up

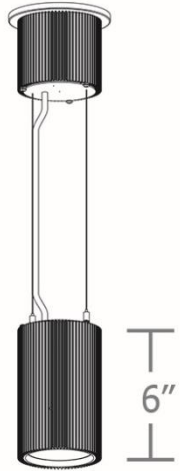

P7512.up

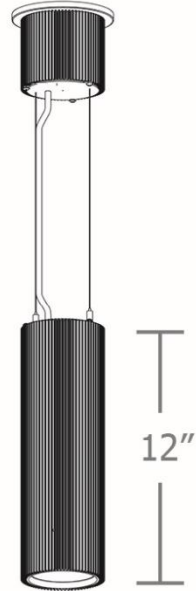

direct/ indirect

- P7506 (06"): 395–1985 lm / 340–845 lm
- P7512 (12"): 395–2780 lm / 340–1185 lm




construction

canopy mounted drivers, constant current, field maintainable, universal input (120-277v), 0-10v controllable to 5% dimming.

slim silver braid power cord standard

4" dia. ribbed extruded aluminum outer housing

Downlight **90+ cri** COB light engine standard
2700K, 3000K, 3500K and 4000K.

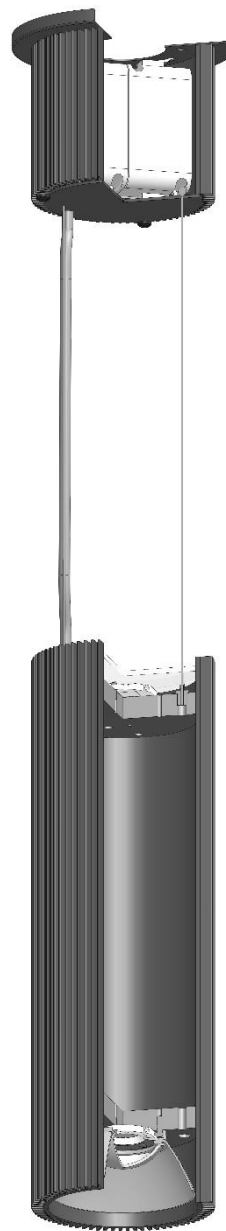

extruded aluminum driver canopy, painted to match fixture, holds two stainless steel ultra-thin cables with field adjustable micro-grippers allowing for exact aff mounting


up light COB light engine in **90+ cri** standard .
2700K, 3000K, 3500K and 4000K. wd855 frost acrylic top lens protects COB from dust and shields it from view

available in 2 anodized finishes,
12 standard powder coat finishes
+ custom RAL colors

field changeable downlight optics: 20° (spot), 30° (med),
50° (wide), 90° (extra wide) reflector with color mixing dome.

performance



Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
str8.up	+	29.1 fc	46.9 fc	18.0 fc	2.6:1	1.6:1

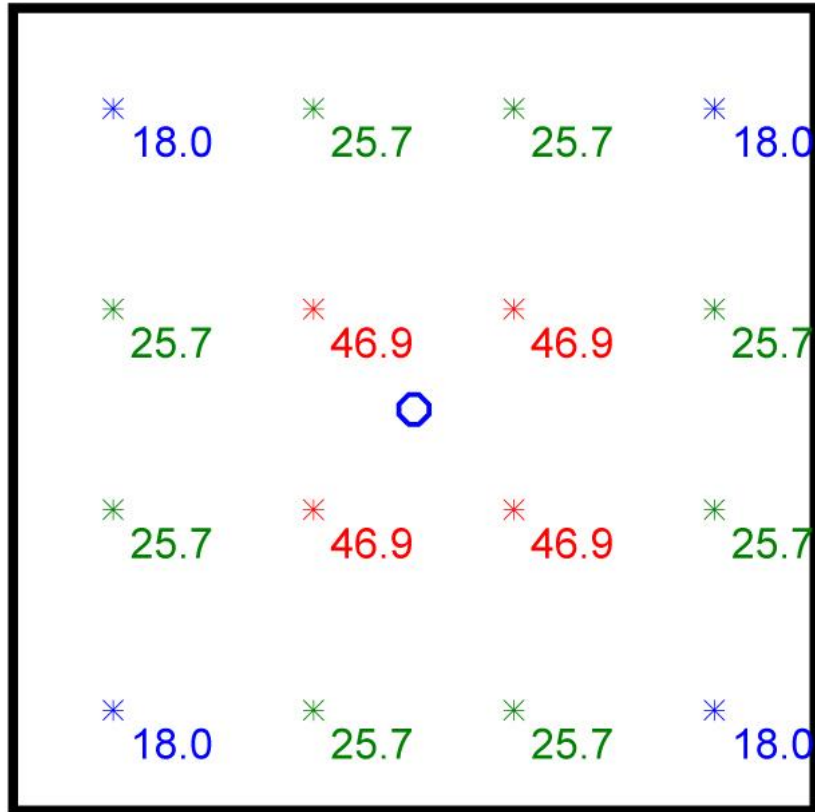

Plan View
Scale - 1" = 2ft

- 8' x 8' x 10'H space
- 80/50/20 reflectances
- bottom of fixture at 8' aff
- FC readings at 2.5' aff
- layout conducted using (H2) 1985 lumen 90 CRI downlight and (L3) 845 lumen uplight



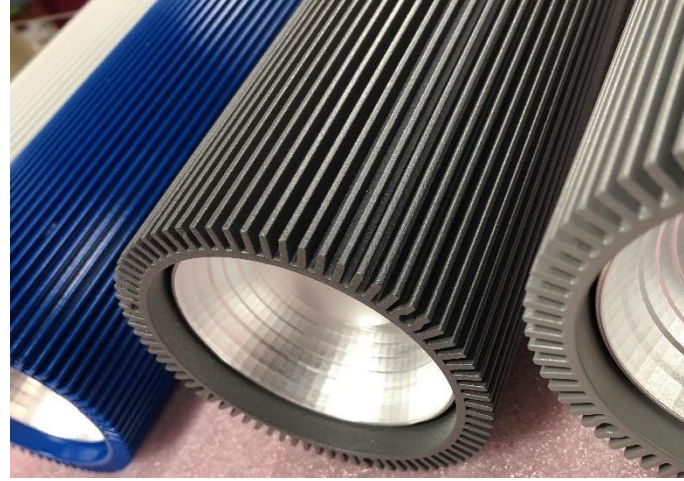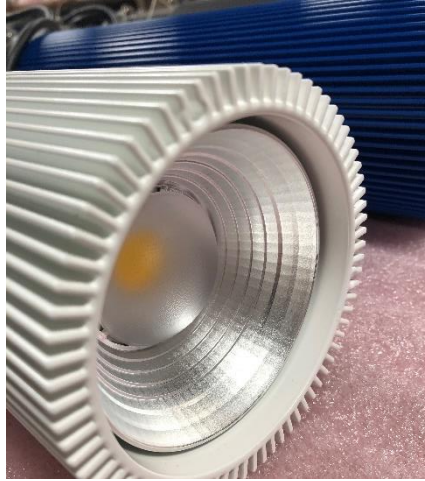

www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

str.8.up™ 5-slider

