




sq.3.up™ 5-slider

your lighting rep has
recommended the **sq.3.up™**
cylinder pendant for your project
Let's take a quick look:



sizes and lumens

P6606.up **P6612.up** **P6618.up** **P6624.up**

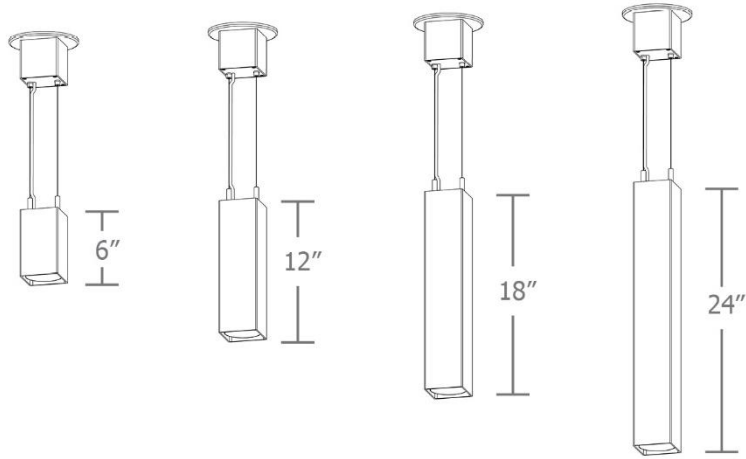

direct/ indirect

- P6606 (06"): 395–1985 lm / 340-845 lm
- P6612 (12"): 395–2780 lm / 340-1185 lm
- P6618 (18"): 395–2780 lm / 340-1185 lm
- P6624 (24"): 395–2780 lm / 340-1185 lm




construction

extruded aluminum canopy with universal bracket for easy clocking, painted to match fixture

silver braid power cord “disappears” next to stainless steel aircraft cable

COB light engines (direct/indirect) in **90+ CRI** standard.
2700K, 3000K, 3500K and 4000K.

15 standard powder coat paint finishes + custom RAL colors

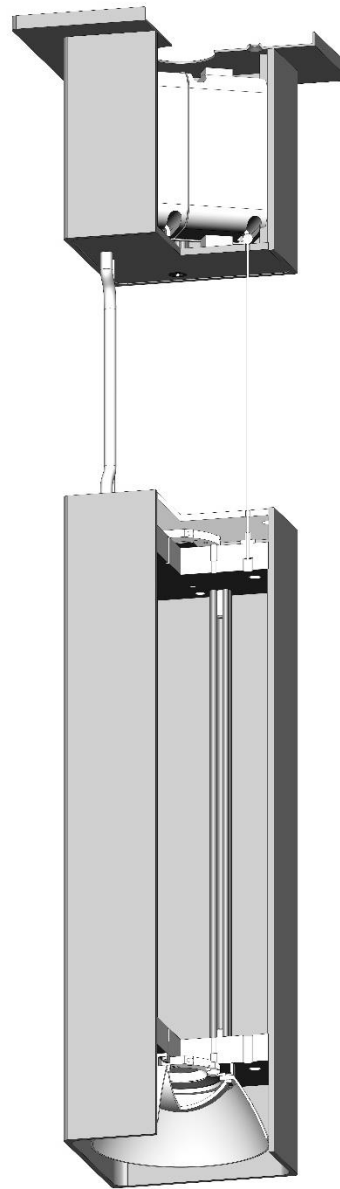

canopy mounted drivers, constant current, field maintainable, universal input (120-277v), 0-10v controllable to 5% dimming

single stainless-steel ultra-thin cables with field adjustable micro-grippers allowing for exact desired mounting height


up light wd855 frost acrylic top lens protects COB from dust and shields it from view

3.5” square smooth extruded aluminum outer housing

field changeable downlight optics: 20° (spot), 30° (med), 50° (wide), 90° (extra wide)

performance

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
sq.3.up	+	29.1 fc	46.9 fc	18.0 fc	2.6:1	1.6:1

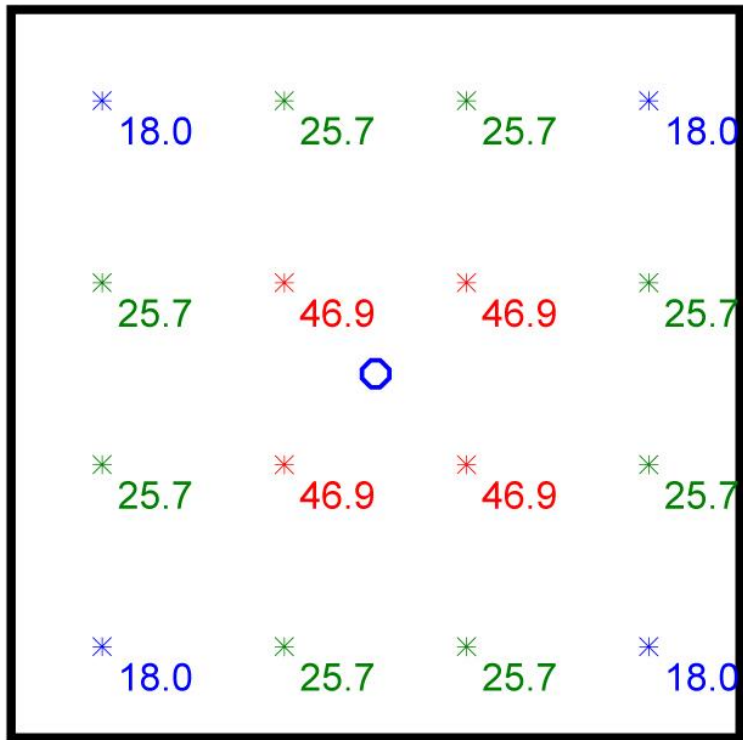

- 8' x 8' x 14'H space
- 80/50/20 reflectances
- bottom of fixture at 10' aff
- FC readings at 2.5' aff
- layout conducted using 12" length unit with 90cri (H3) 2780 direct lumens and (H1) 1185 indirect lumens





www.impacttg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

sq.3.up™ 5-slider

