





)(ula.linear™ 5-slider

your lighting rep has  
recommended the  
**)(ula.linear™**  
pendant for your project  
Let's take a quick look:

## sizes and lumens

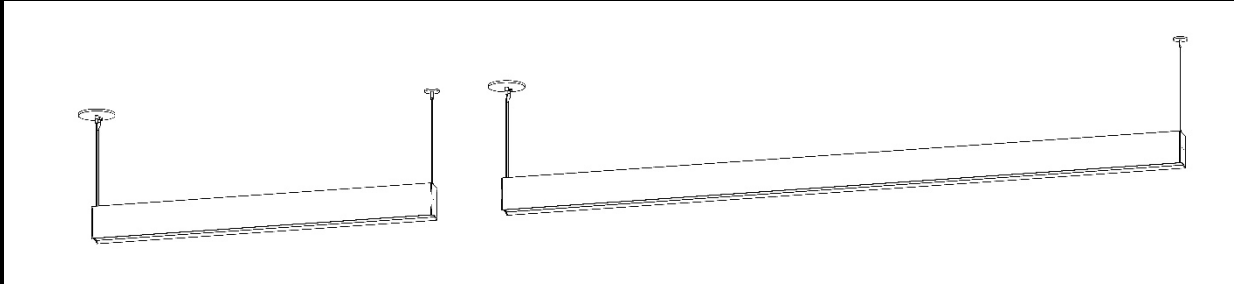

- P7248 (4'): 1600-4000 lm direct/ 1600-4000 lm indirect
- P7296 (8'): 3300-8100 lm direct / 3200-8100 lm indirect

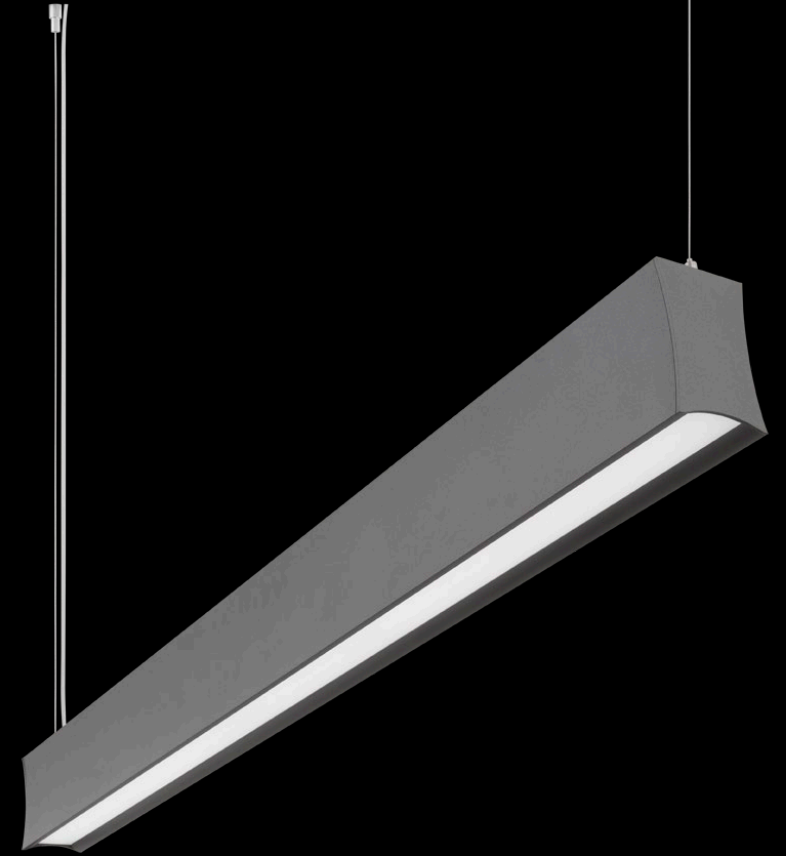


## construction

two-point vertical mounting utilizing 3' or 6' long stainless-steel cables, field adjustable grippers

47" white module LED board, L80 > 72,000 hrs, **90 cri** standard, 3000K, 3500K, 4000K direct or direct/indirect

integral programmable drivers, field maintainable, universal input (120-277v), 0-10v controllable, 1% dimming.

bottom lens .118" thick laser cut optimum light diffusion acrylic, **72% light transmission**

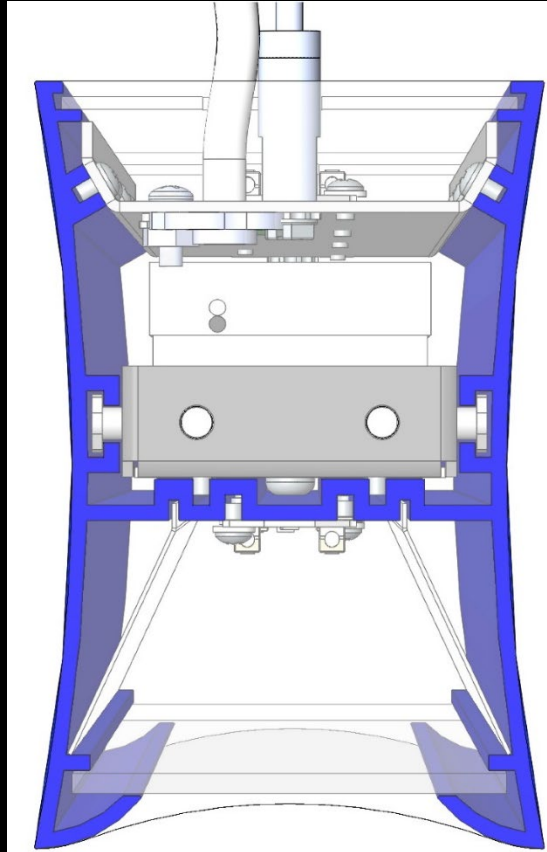

**80° batwing diffuser** patent-pending Brightwing™ achieves a flat-field beam profile, uniformly illuminating the ceiling without a central hot-spot

**94% efficient**

hourglass curved profile with a soft bullnose bottom return

choose from **15 standard** powder coat paint finishes or ask about our new WOOD finishes


)(ula.linear™ 5-slider

seamless single piece aluminum extrusion



# performance

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
ula.linear	+	31.1 fc	54.0 fc	17.6 fc	3.1:1	1.8:1

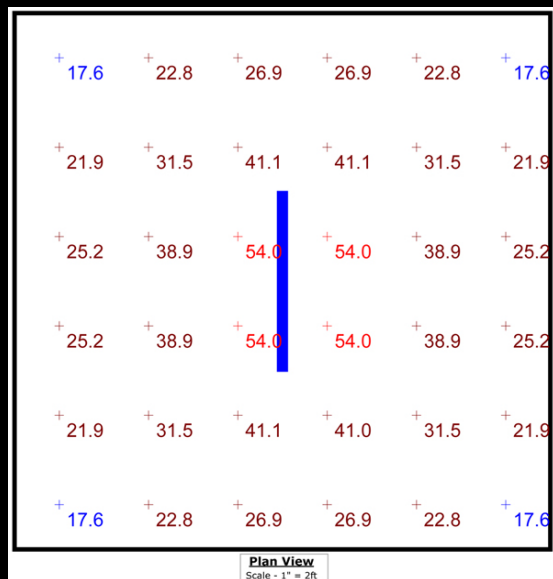

- 12' x 12' x 10'H space
- 80/50/20 reflectances
- bottom of fixture at 8" aff
- FC readings at 2.5' aff
- layout conducted using P7248 HX - HX (4000 direct / 4000 indirect delivered lumens) 90CRI





[www.impactltg.com](http://www.impactltg.com)

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 6-week lead time

)(ula.linear™ 5-slider

