




na.row.r™ 5-slider

your lighting rep has
recommended the **na.row.r™**
cylinder pendant for your project
Let's take a quick look:

sizes and lumens

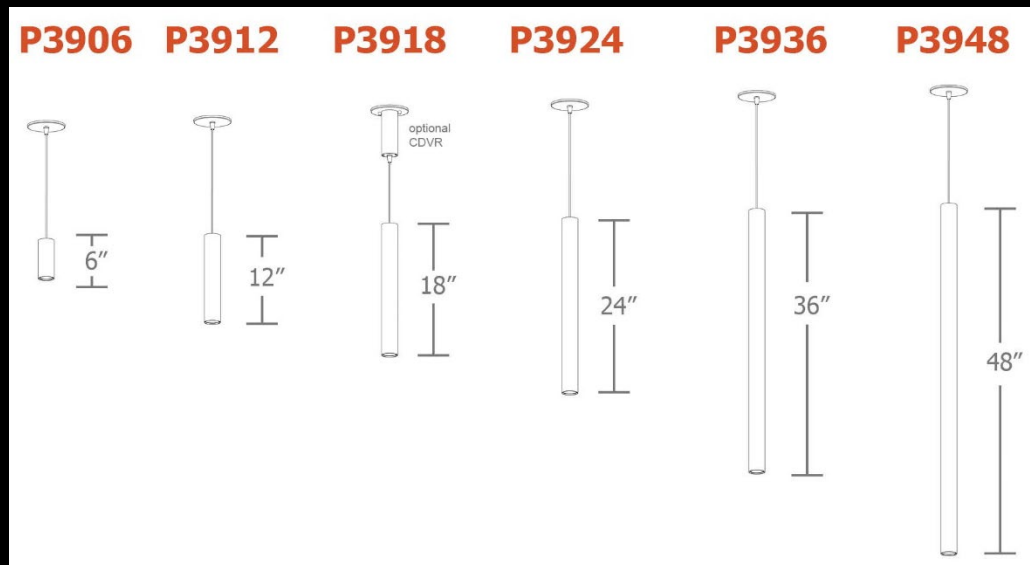

- P3906 (6") / 360 – 1805 lm
- P3912 (12") / 360 – 1805 lm
- P3918 (18") / 360 – 1805 lm
- P3924 (24") / 360 – 1805 lm
- P3936 (36") / 360 – 1805 lm
- P3948 (48") / 360 – 1805 lm

na.row.r™ 5-slider

na.row.r™



2" dia.

construction

5" d canopy painted to match fixture

**optional CDVR – canopy mounted driver*

optional colored cloth power cord in blue, orange, purple, red or white & gray dot

90cri LED COB in 2700K, 3000K, 3500K, and 4000K. field changeable standard downlight optics: 12° (spot), 25° (med), and 38° (wide)



driver mounted in J-box: constant current, field maintainable, universal input (120-277v), 0-10v controllable to 5% dimming
****2-1/8" deep J-box required (by other)**


36" silver braid power cord standard. allowing for exact desired mounting height

2" dia. smooth extruded aluminum outer housing

15 standard powder coat paint finishes + custom RAL colors



performance

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
na.row	+	27.1 fc	39.6 fc	18.5 fc	2.1:1	1.5:1

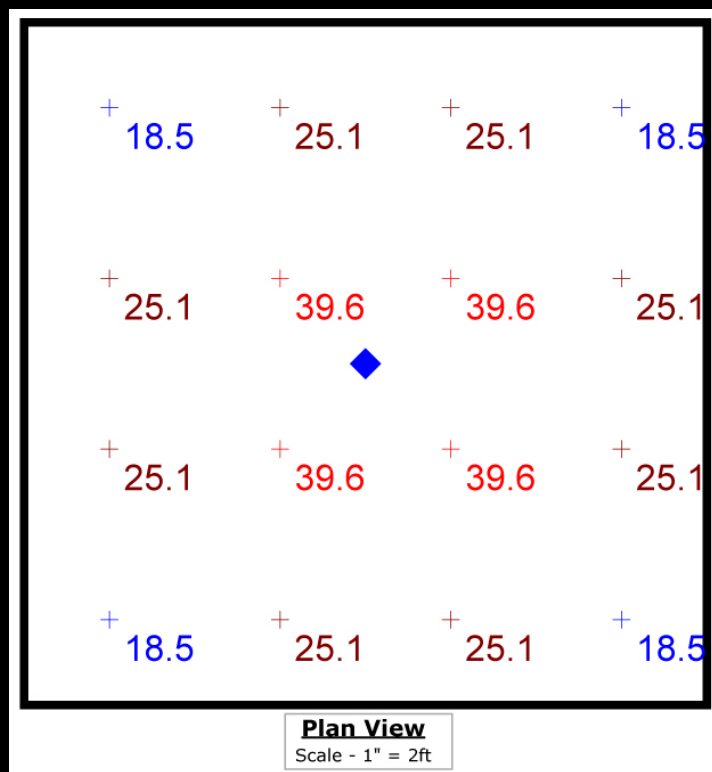

- 8' x 8' x 12'H space
- 80/50/20 reflectances
- bottom of fixture at 10' aff
- FC readings at 2.5' aff
- layout conducted using P3912-H2 unit with 90 cri wide dist. 1805 lumen package



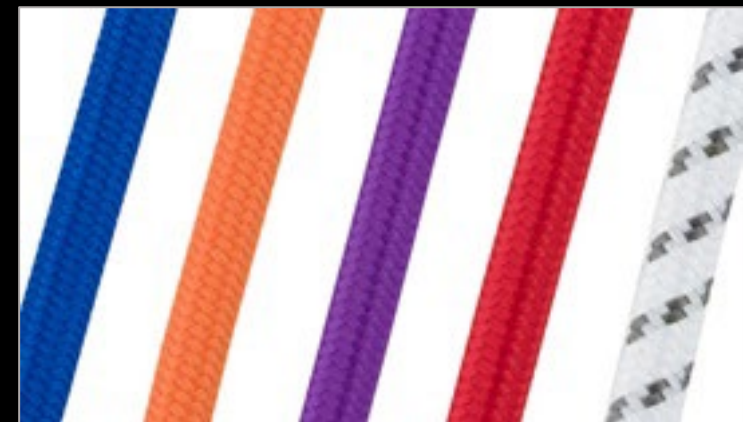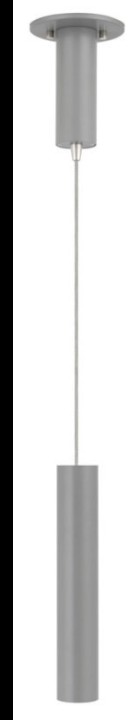

www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

na.row™ 5-slider

