




top.ls.tiki.up™ 5-slider

your lighting rep has recommended the **top.ls.tiki.up™** direct/indirect pendant for your project Let's take a quick look:



## sizes and lumens

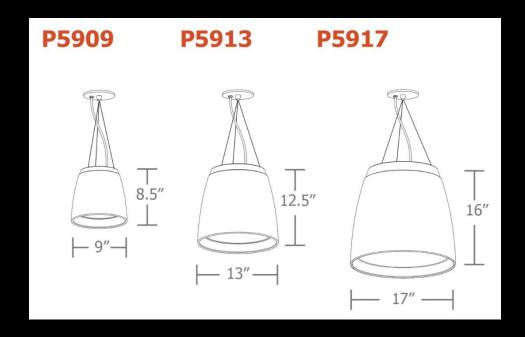

direct / indirect

P5909 (9"): 995–2780 lm / 970 lm

■ P5913 (13"): 1585–4120 lm / 775-1940 lm

■ P5917 (17"): 2580–4985 lm / 775-2135 lm





## construction

integral drivers, field maintainable, universal input (120-277v), 0-10v controllable to 1% dimming.

precision CNC spun aluminum tapered drum with rolled bottom edge for added strength

15 standard powder coat paint finishes + custom RAL colors

5" dia. mounting canopy with ultrathin stainless steel Wisp® cable tripod and tiny field adjustable grippers for exact mounting height



downlight portion either open or optional flat frosted acrylic lens

spun aluminum up light platform recesses into top of housing. 340° omnidirectional silicone optic

COB LED modules – direct/ Indirect

90+ cri standard.

2700K, 3000K, 3500K and 4000K.

Dual circuit dimming available – requires

2<sup>nd</sup> power cord.


spun aluminum inner conical reflector finished in high reflectance (>92%) matte white powder coat paint



## performance

Schedule													
Symbol	QTY	Manufacturer	Catalog Number	Description	Lamp	Wattage							
	1	Impact Architectural Lighting	P5917 40 HX 40 HI	17" dia. pendant top.ls.tiki.up luminaire w/ open bottom	4000k 90cri LED	73							

Statistics										
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min				
top.ls.tiki.up	+	35.1 fc	64.9 fc	26.5 fc	2.4:1	1.3:1				



- 10' x 10' x 16'H space
- 80/50/20 reflectances
- bottom of fixture at 12' aff
- FC readings at 2.5' aff
- layout conducted using P5917-40HX-40HI lumen package (4985 lm direct / 2135 indirect delivered lumens)







- spec sheet and color chart
- photometric files
- built to order in Saint Louis, MO, USA
- 4-week lead time

