




tink.r.2™ 5-slider

your lighting rep has
recommended the **tink.r.2™**
cylinder pendant for your project
Let's take a quick look:

8 configurations x 3 sizes =
22 combinations

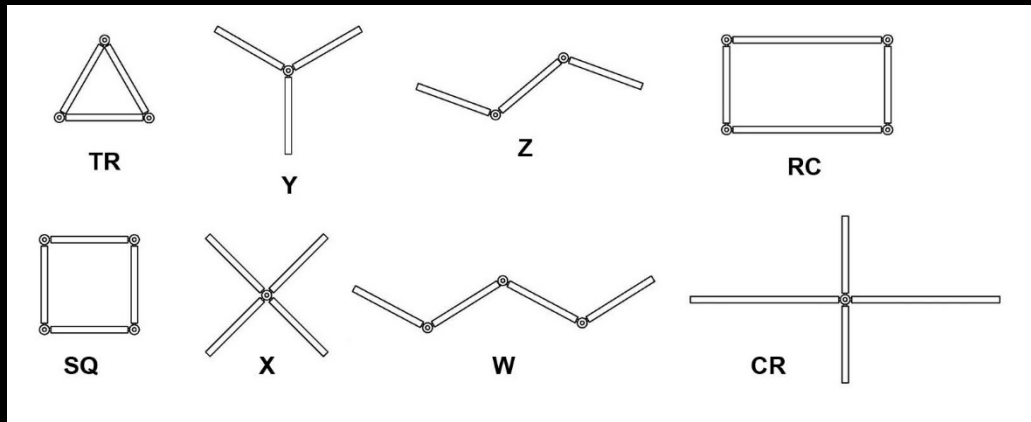

range 400 – 800 lm/ft

- P8524 (24"legs) / 2400 – 6400 lm*
- P8548 (48"legs) / 4800 – 12800 lm*
- P8572 (72"legs) / 7200 – 25600 lm*

*total lumens depend on config + leg size




construction

remote driver enclosure standard,
constant current, field maintainable,
universal input (120-277v), 0-10v
controllable to 1% dimming

satin white canopies with ultra-thin
wisp aircraft cables, field adjustable at
mini-grippers located along T-slot or ball
grippers located at hubs. ultra-thin
silver braid power cord standard

extruded aluminum spine
available in 4 Designer
powder coat paint finishes

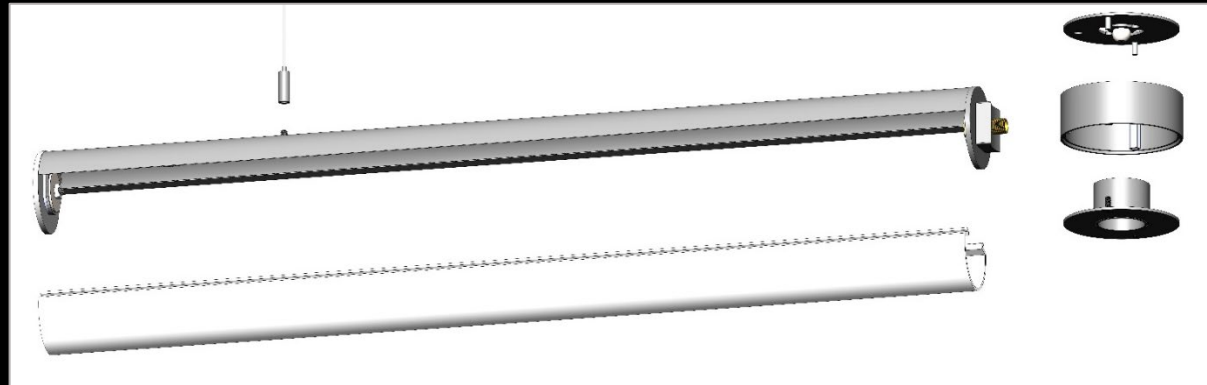

90 cri premium architectural
grade flexible LED PCB in
3000K, 3500K, or 4000K


proprietary extruded frosted
acrylic with 80% transmission and
excellent LED diffusion

tink.r.2™ 5-slider



performance

Statistics					
Description	Avg	Max	Min	Max/Min	Avg/Min
tink.r.2 Z configuration	20.39	36	10	3.60	2.04

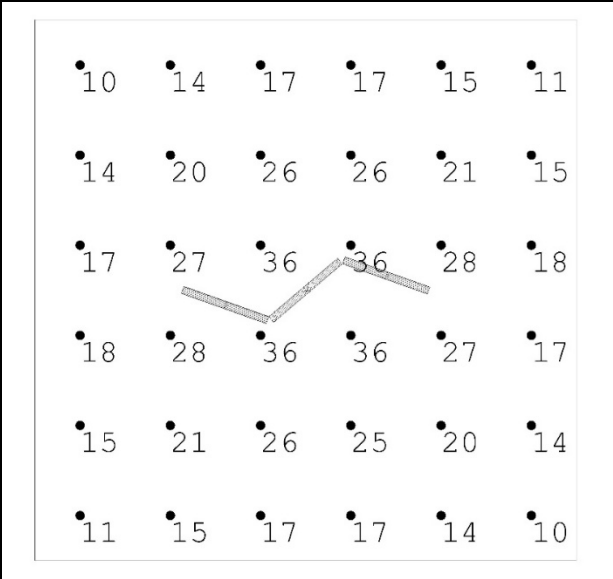

- 12' x 12' x 10'H space
- 80/50/20 reflectances
- bottom of fixture at 8' aff
- FC readings at 2.5' aff
- layout conducted using P8524-Z-40HI





www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

tink.r.2™ 5-slider

