




imago ii™ 5-slider

your lighting rep has
recommended the **imago ii™**
pendant for your project
Let's take a quick look:



sizes and lumens

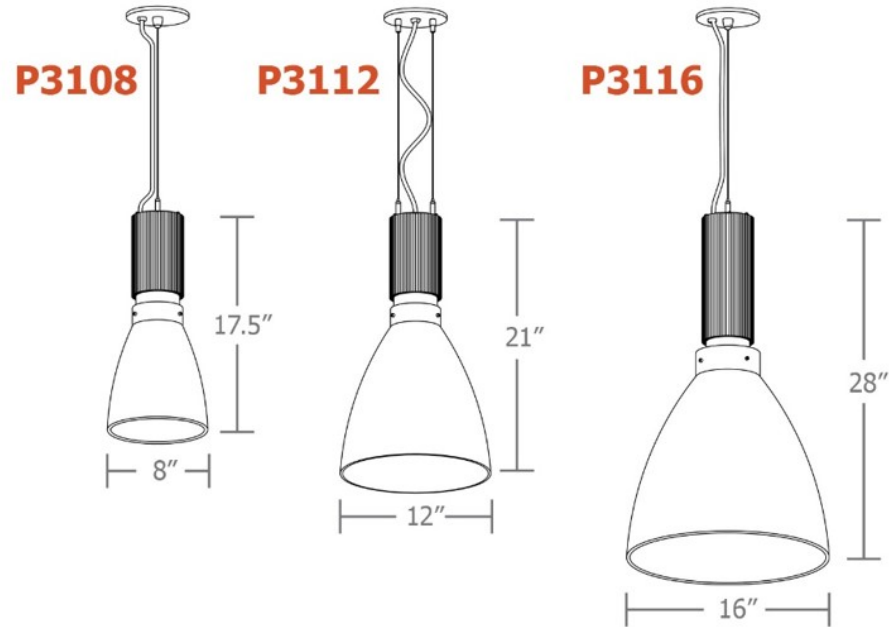

- P3108 (8") / 1480 – 3900 lm
- P3112 (12") / 1480 – 3900 lm
- P3116 (16") / 2120 – 5000 lm




construction

integral programmable driver, constant current , universal input (120-277v), field maintainable, 0-10v controllable to 1% dimming.

single COB LED module in 80+ CRI standard or optional 90 CRI
2700K, 3000K, 3500K and 4000K.

.064 spun aluminum parabolic reflector with rolled bottom edge for added strength, anodize paint finish standard, optional satin black

white segmented internal reflector for optimal lumen efficiency

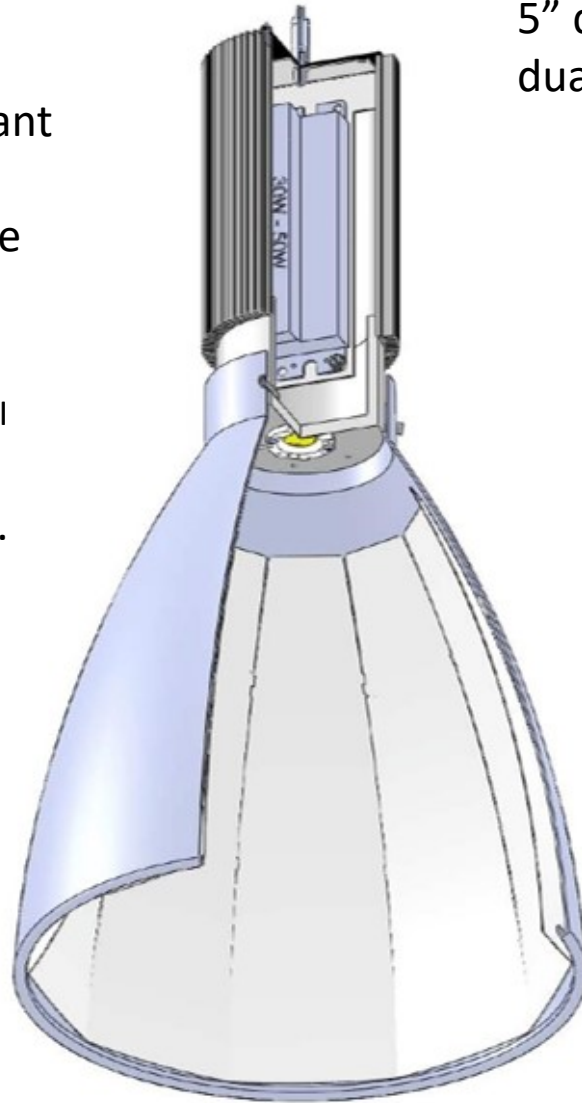

5" dia. spun steel canopy with single or dual field adjustable stainless-steel cables

powerhead:
2 anodized finishes, 18 standard
powder coat paint finishes
+ custom RAL colors

(POC) power over cable suspension
system option provides a clean look
without the need for a separate power
cord


optional colored cloth power cord in
blue, orange, purple, red, or white
& gray dot

optional P95 acrylic bottom lens

performance

Statistics

Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
imago.ii	+	26.2 fc	41.2 fc	13.2 fc	3.1:1	2.0:1

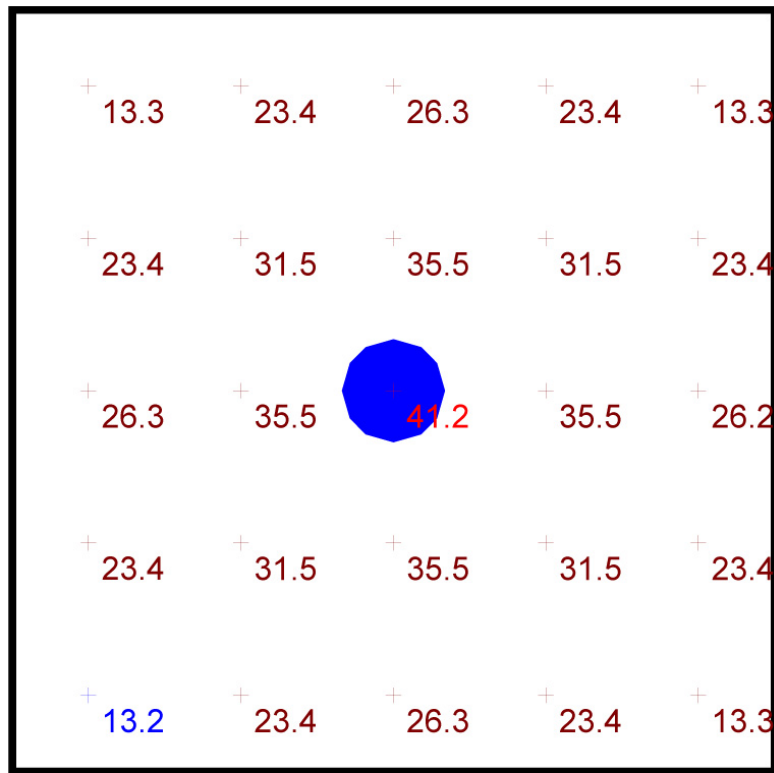

Plan View
Scale - 1" = 2ft

- 10' x 10' x 14'H space
- 80/50/20 reflectances
- bottom of fixture at 12' aff
- FC readings at 2.5' aff
- layout conducted using P3116 HI output unit (3900 delivered lumens)





www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

imago ii™ 5-slider

