



imago™ 5-slider

your lighting rep has
recommended the **imago™**
pendant for your project
Let's take a quick look:



sizes and lumens



- P3508 (8") / 1535 – 3790 lm
- P3512 (12") / 1535 – 3790 lm



construction

integral programmable driver, constant current , universal input (120-277v), field maintainable, 0-10v controllable to 1% dimming.

2 anodized finishes + 12 standard powder coat paint finishes + custom RAL colors

single COB LED module in 90+ CRI standard 2700K, 3000K, 3500K and 4000K.

.25" open bottom parabolic acrylic diffuser



5" dia. spun steel canopy with single or dual field adjustable stainless-steel cables


(POC) power over cable suspension system **option** provides a clean look without the need for a separate power cord

optional colored cloth power cord in blue, orange, purple, red, or white & gray dot

optional frosted acrylic bottom lens, solvent welded to bottom of parabolic diffuser

performance

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
imago	+	31.8 fc	47.0 fc	15.1 fc	3.1:1	2.1:1

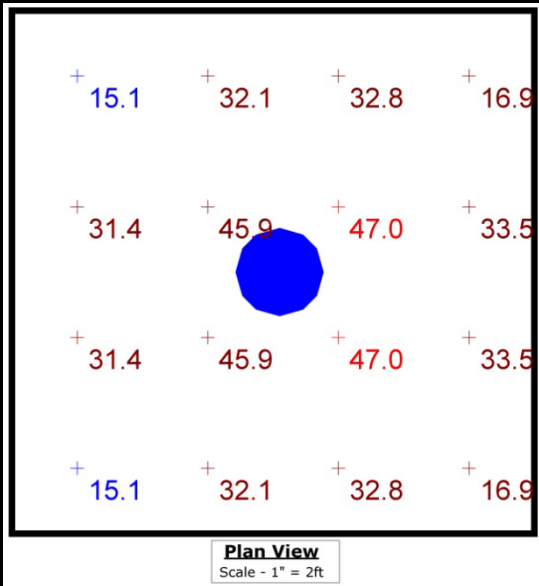

- 10' x 10' x 12'H space
- 80/50/20 reflectances
- bottom of fixture at 10' aff
- FC readings at 2.5' aff
- layout conducted using P3512 unit with HX lumen 90cri package providing 3790 delivered lumens





www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time