




mere™ 5-slider

your lighting rep has
recommended the **mere™**
pendant for your project
Let's take a quick look:

sizes and lumens

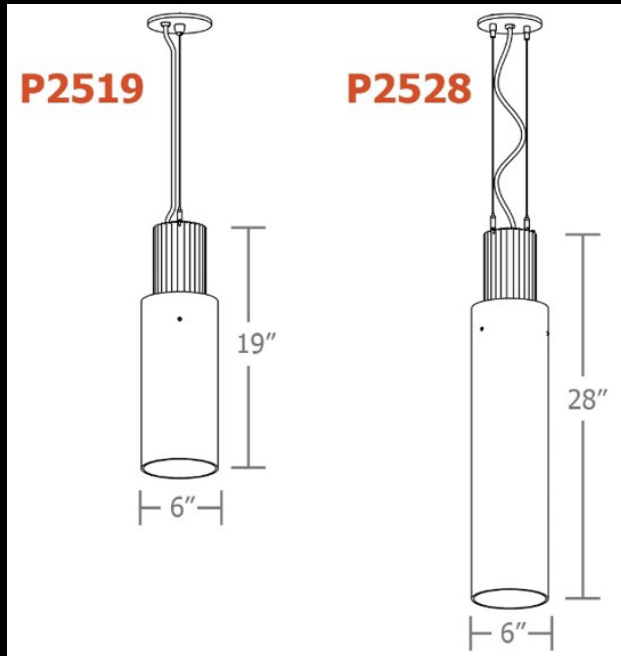

- P2519 (19") / 1535 – 3790 lm
- P2528 (28") / 1535 – 3790 lm



construction


integral programmable constant current , universal input (120-277v) driver, field maintainable, 0-10v controllable to 1% dimming

single COB LED module **90+ CRI** standard 2700K, 3000K, 3500K and 4000K.

6" dia. cylindrical open bottom
wd300 white acrylic diffuser

optional frost acrylic bottom lens,
solvent welded to bottom of
cylindrical diffuser

5" dia. spun steel canopy with
single or dual field adjustable
stainless-steel cables

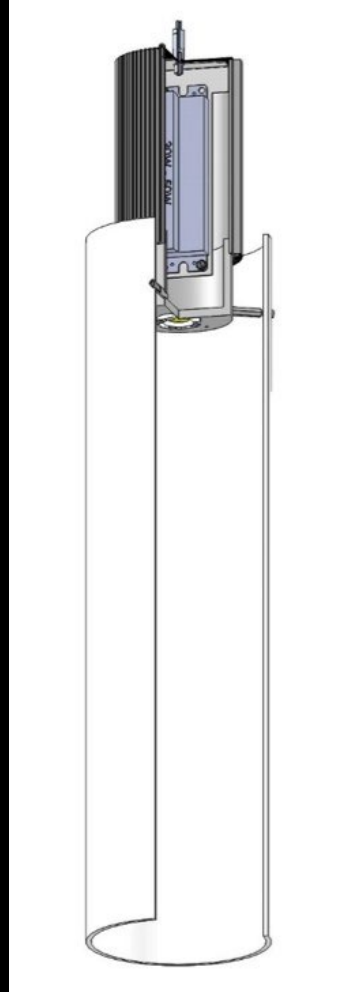


2 anodized finishes + 12 standard
powder coat paint finishes + custom
RAL colors

(POC) power over cable suspension
system **option** provides a clean look
without the need for a separate power
cord

optional color cloth power cord in
blue, orange, purple, red, or white
& gray dot

performance

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
mere	+	18.4 fc	32.1 fc	11.2 fc	2.9:1	1.6:1

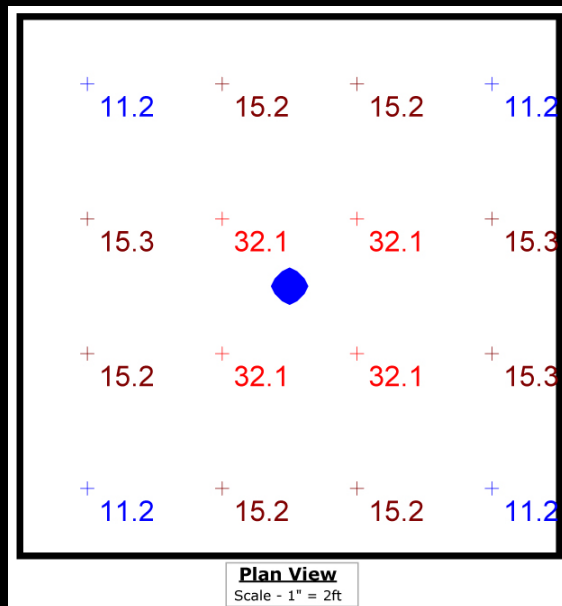

- 10' x 10' x 10'H space
- 80/50/20 reflectances
- bottom of fixture at 8'0" aff
- FC readings at 2.5' aff
- layout conducted using P2519 unit with HI lumen 90cri package providing 2980 delivered lumens





www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time