




mere.ly™ 5-slider

your lighting rep has  
recommended the **mere.ly™**  
pendant for your project  
Let's take a quick look:




## sizes and lumens

**P9912**

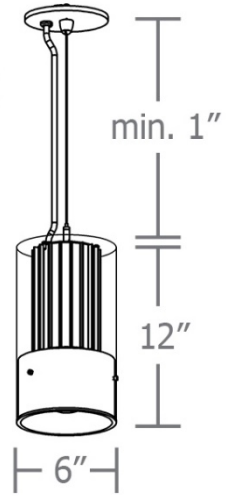

**P9924**

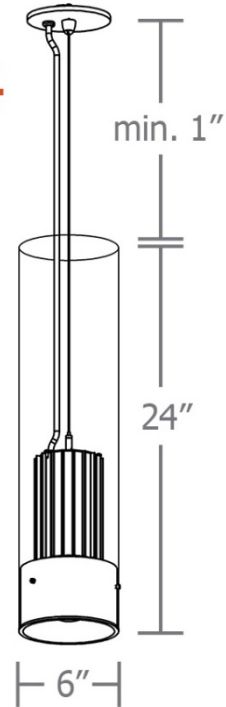

- P9912 (12") / 1625 – 2325 lm
- P9924 (24") / 1625 – 2325 lm




## construction

6" dia. cylindrical open-bottom .100" virgin clear acrylic diffuser; non-standard lengths available upon request

integral programmable driver, constant current, universal input (120-277v), field maintainable, 0-10v controllable to 1% dimming.

flexible film rests on clear acrylic ledge bonded to bottom of cylinder. choose from 4 colors/patterns .

single COB LED module in 80+ CRI standard or optional 90 CRI 2700K, 3000K, 3500K and 4000K

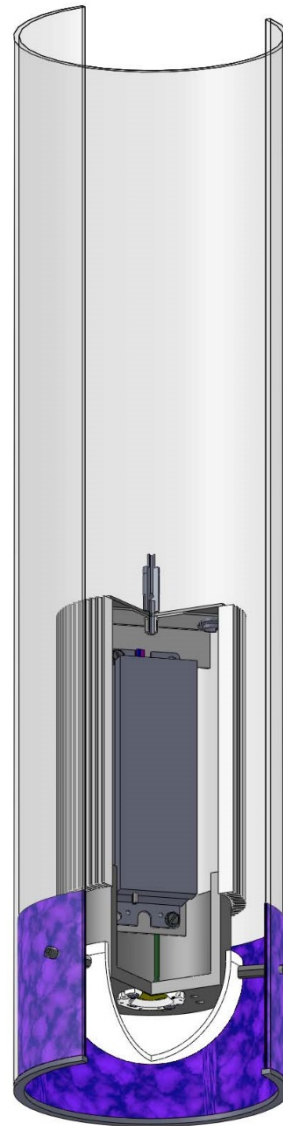

secondary white diffuser dome over LED softens down light

5" dia. spun steel canopy with single or dual field adjustable stainless steel cables that allow for exact AFF mounting heights

(POC) power over cable suspension system option provides a clean look without the need for a separate power cord


optional colored cloth power cord in blue, orange, purple, red, or white & gray dot

2 anodized finishes, 18 standard powder coated paint finishes + custom RAL colors

# performance

## Statistics

Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
mere.ly	+	14.2 fc	29.2 fc	8.4 fc	3.5:1	1.7:1

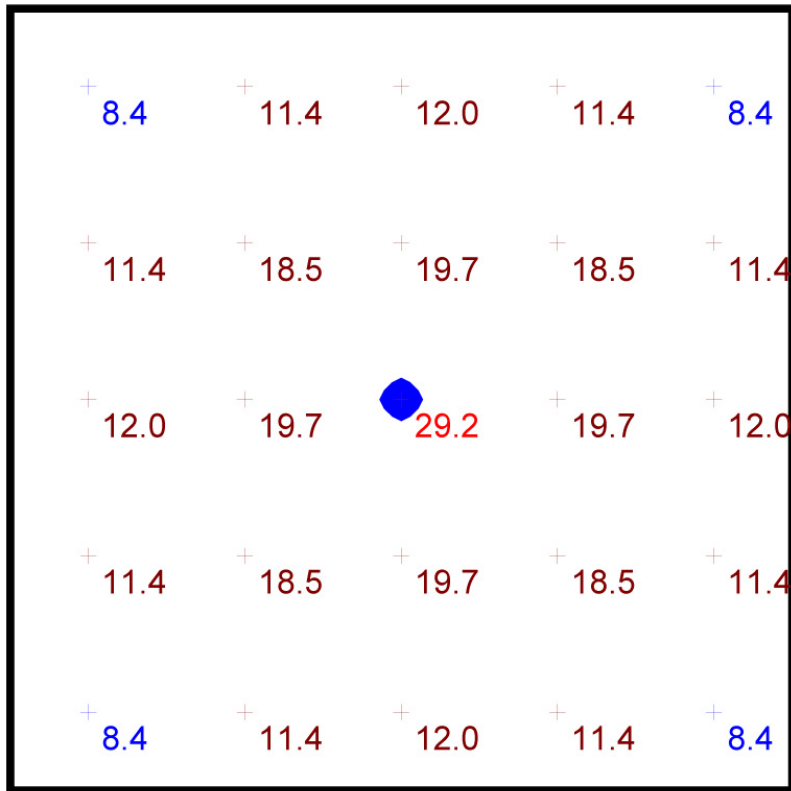

Plan View  
Scale - 1" = 2ft

- 10' x 10' x 10'H space
- 80/50/20 reflectances
- bottom of fixture at 7' aff
- FC readings at 2.5' aff
- layout conducted using P9924 LO lumen package (2325 delivered lumens)







## Decorative Films



**AB Aurora Borealis**



**CS California Sunset**



**CB Cranberry**



**NY New York Velvet**



[www.impactltg.com](http://www.impactltg.com)

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

mere.ly<sup>™</sup> 5-slider

