



bul.it™ 5-slider

your lighting rep has
recommended the **bul.it™**
pendant for your project
Let's take a quick look:

sizes and lumens



- P3308 (8") / 995 – 2780 lm
- P3312 (12") / 960 – 3065 lm
- P3316 (16") / 1600 – 3885 lm



construction

(POC) power over cable
suspension system *option*
provides a clean look without the
need for a separate power cord

single COB LED module in
2700K, 3000K, 3500K,
4000K, **90+** CRI standard

.050" spun aluminum
conical reflector finished in
high reflectance (>92%)
matte white powder coat

integral programmable driver,
universal input (120-277v), field
maintainable, 0-10v controllable
to 1% dimming.



open bottom, frosted acrylic flat lens, or
open with decorative colored ring in
amber, blue, frost, green, red, or yellow


5" dia. spun steel canopy with
field adjustable tripod
stainless steel cables


optional colored cloth power
cord in blue, orange, purple,
red or white & gray dot


precision CNC spun .063" aluminum
parabolic housing with rolled
bottom edge for added strength

15 standard powder
coat paint finishes
+ custom RAL colors

performance

Schedule						
Symbol	QTY	Manufacturer	Catalog Number	Description	Lamp	Wattage
	1	Impact Architectural Lighting	P3316 40 HX	16" dia. pendant bul.it luminaire w/ open bottom	4000k 90cri LED	45

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
bul.it		25.7 fc	44.5 fc	17.9 fc	2.5:1	1.4:1

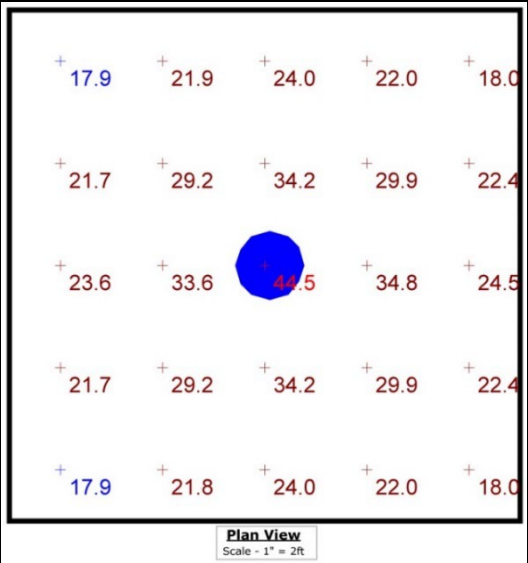

- 10' x 10' x 14'H space
- 80/50/20 reflectances
- bottom of fixture at 12' aff
- FC readings at 2.5' aff
- layout conducted using P3116 HX output 90+ cri (3885 delivered lumens)





www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time