




bul.it™ 5-slider

your lighting rep has recommended the **bul.it™** pendant for your project
Let's take a quick look:



sizes and lumens

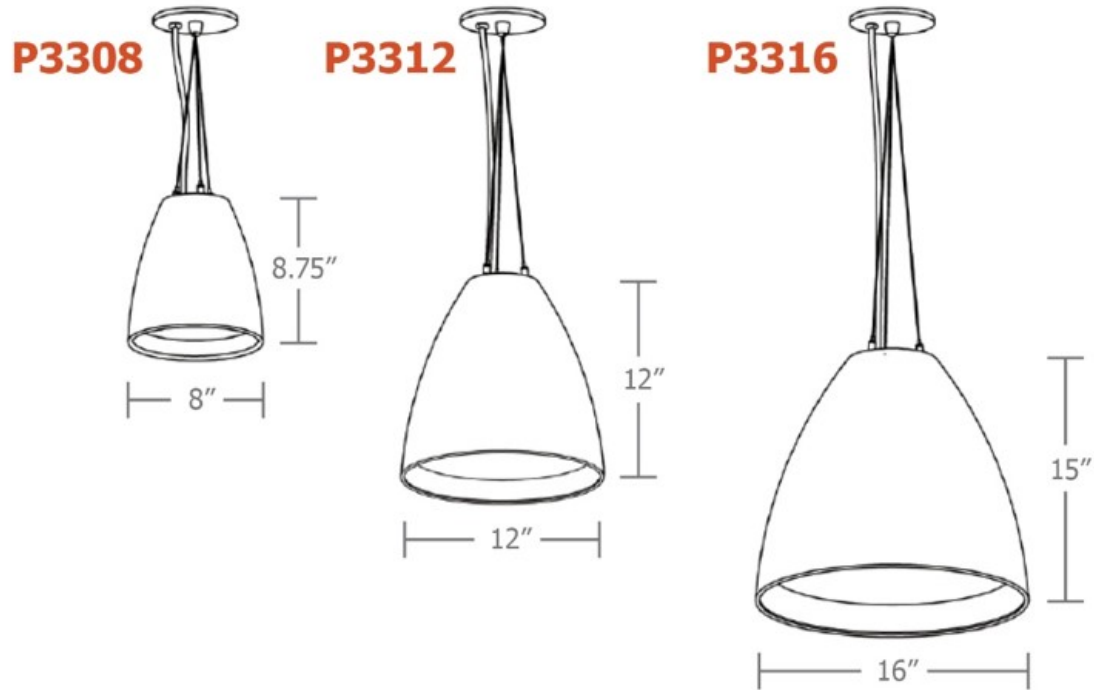

- P3308 (8") / 1190 – 3333 lm
- P3312 (12") / 1000 – 3500 lm
- P3316 (16") / 1600 – 5000 lm



construction

integral programmable driver, universal input (120-277v), field maintainable, 0-10v controllable to 1% dimming.

5" dia. spun steel canopy with field adjustable tripod stainless steel cables


(POC) power over cable suspension system option provides a clean look without the need for a separate power cord

single COB LED module in 2700K, 3000K, 3500K, 4000K, 80+ CRI standard or optional 90 CRI

optional colored cloth power cord in blue, orange, purple, red or white & gray dot

precision CNC spun .063" aluminum parabolic housing with rolled bottom edge for added strength

.050" spun aluminum conical reflector finished in high reflectance (>92%) matte white powder coat

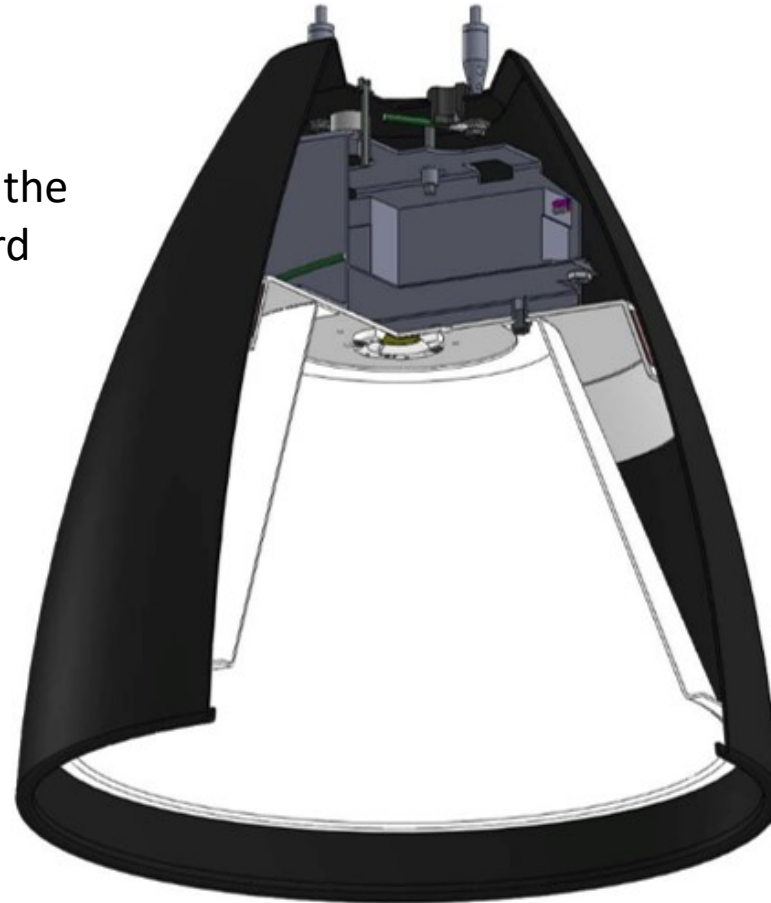


21 standard powder coat paint finishes + custom RAL colors

open bottom, frosted acrylic flat lens, or open with decorative colored ring in amber, blue, frost, green, red, or yellow

performance

Statistics

Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
bul.it	+	25.3 fc	41.4 fc	15.0 fc	2.8:1	1.7:1

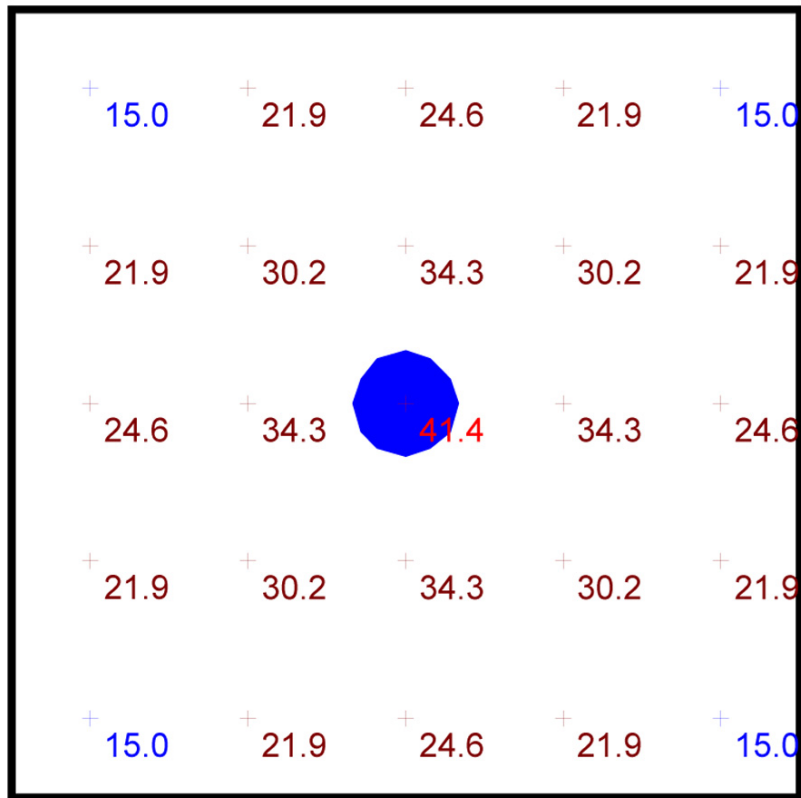

Plan View
Scale - 1" = 2ft

- 10' x 10' x 14'H space
- 80/50/20 reflectances
- bottom of fixture at 12' aff
- FC readings at 2.5' aff
- layout conducted using P3116 HI output (3700 delivered lumens)





www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

bul.it™ 5-slider

