


top.Is.tiki™ 5-slider

your lighting rep has
recommended the **top.Is.tiki™**
pendant for your project
Let's take a quick look:

sizes and lumens

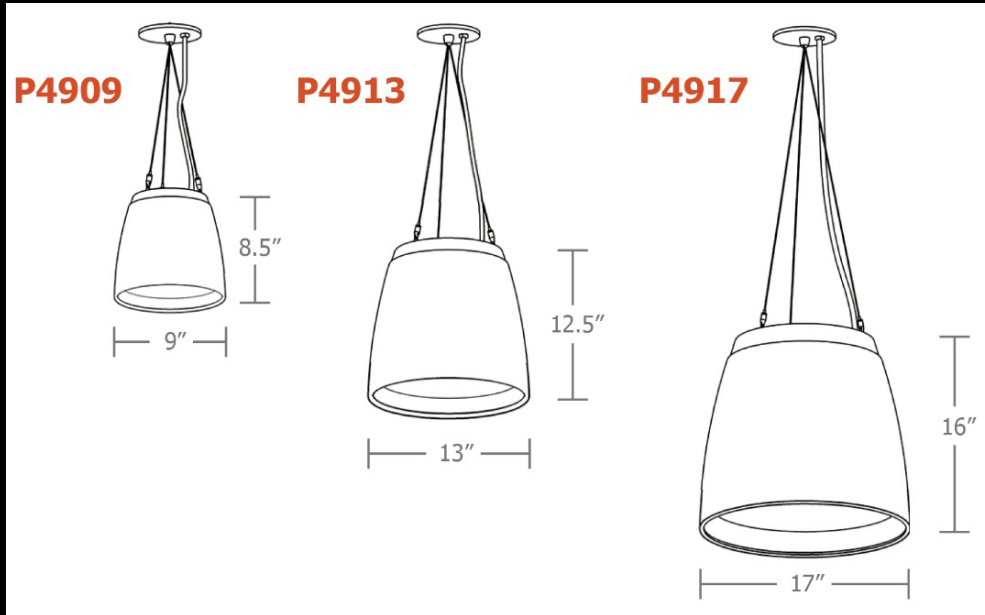

- P4909 (9") / 995 – 2780 lm
- P4913 (13") / 1585 – 4120 lm
- P4917 (17") / 2580 – 4985 lm




construction

(POC) power over cable
suspension system *option*
provides a clean look without the
need for a separate power cord

precision CNC spun aluminum
tapered drum with rolled bottom
edge for added strength

spun aluminum inner conical
reflector finished in high
reflectance (>92%) matte white
powder coat paint

integral driver, field maintainable,
universal input (120-277v), 0-10v
controllable to 1% dimming.

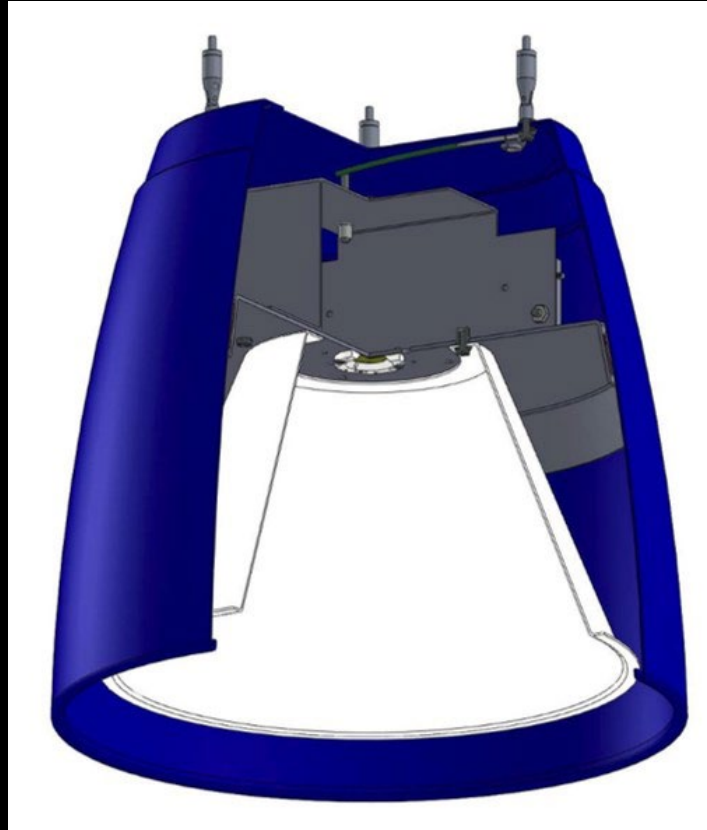

5" dia. mounting canopy with
stainless steel cable tripod and
field adjustable grippers for
exact mounting height

optional colored cloth power
cord in blue, orange, purple,
red or white & gray dot

single COB LED module
90+ CRI standard
2700K, 3000K, 3500K and
4000K


15 standard powder
coat paint finishes


downlight portion either open
or frosted acrylic flat lens


top.ls.tiki™ 5-slider



performance

| Schedule | | | | | |
|---|-----|----------------|---|-----------------|---------|
| Symbol | QTY | Catalog Number | Description | Lamp | Wattage |
|  | 1 | P4913 40 HI | 13" dia. pendant top.ls.tiki luminaire w/ open bottom | 4000k 90cri LED | 35 |

| Statistics | | | | | | |
|-------------|---|---------|---------|---------|---------|---------|
| Description | Symbol | Avg | Max | Min | Max/Min | Avg/Min |
| top.ls.tiki |  | 26.8 fc | 61.3 fc | 13.2 fc | 4.6:1 | 2.0:1 |

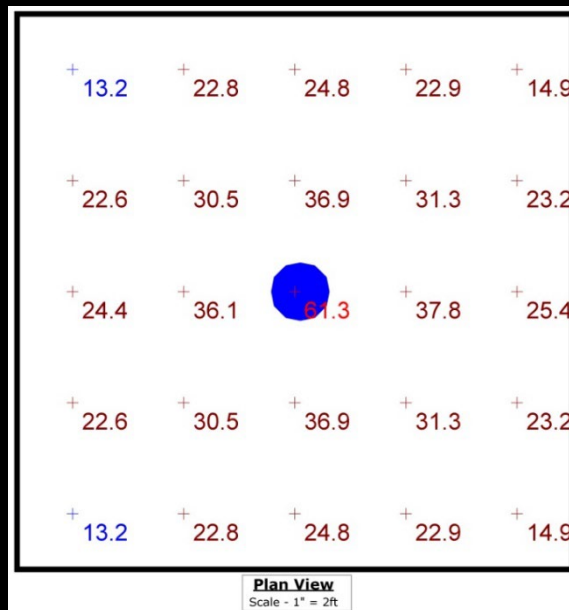

- 10' x 10' x 12'H space
- 80/50/20 reflectances
- bottom of fixture at 10' aff
- FC readings at 2.5' aff
- layout conducted using P4913 HI lumen package 90 cri (3260 delivered lumens)





www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

top.ls.tiki™ 5-slider

