




top.Is.tiki™ 5-slider

your lighting rep has
recommended the **top.Is.tiki™**
pendant for your project
Let's take a quick look:



sizes and lumens

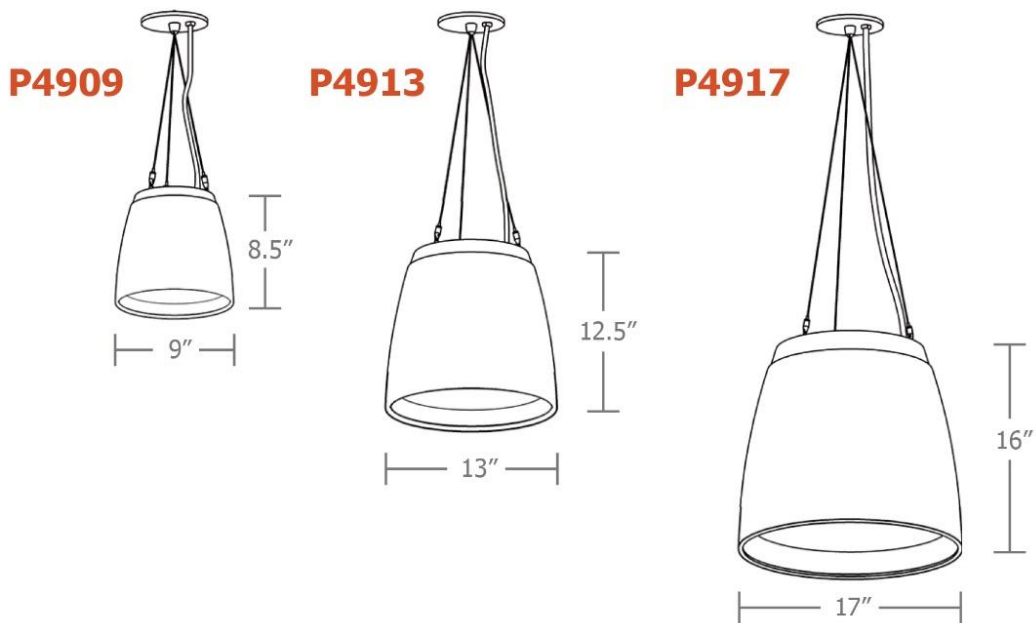

- P4909 (9") / 995 – 2780 lm
- P4913 (13") / 1585 – 4120 lm
- P4917 (17") / 2580 – 4985 lm



construction

(POC) power over cable suspension system *option* provides a clean look without the need for a separate power cord

precision CNC spun aluminum tapered drum with rolled bottom edge for added strength

spun aluminum inner conical reflector finished in high reflectance (>92%) matte white powder coat paint

integral driver, field maintainable, universal input (120-277v), 0-10v controllable to 1% dimming.



downlight portion either open or frosted acrylic flat lens

5" dia. mounting canopy with stainless steel cable tripod and field adjustable grippers for exact mounting height

optional colored cloth power cord in blue, orange, purple, red or white & gray dot


single COB LED module
90+ CRI standard
2700K, 3000K, 3500K and 4000K

15 standard powder coat paint finishes
+ custom RAL colors

performance

Schedule					
Symbol	QTY	Catalog Number	Description	Lamp	Wattage
	1	P4913 40 HI	13" dia. pendant top.ls.tiki luminaire w/ open bottom	4000k 90cri LED	35



Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
top.ls.tiki	+	26.8 fc	61.3 fc	13.2 fc	4.6:1	2.0:1

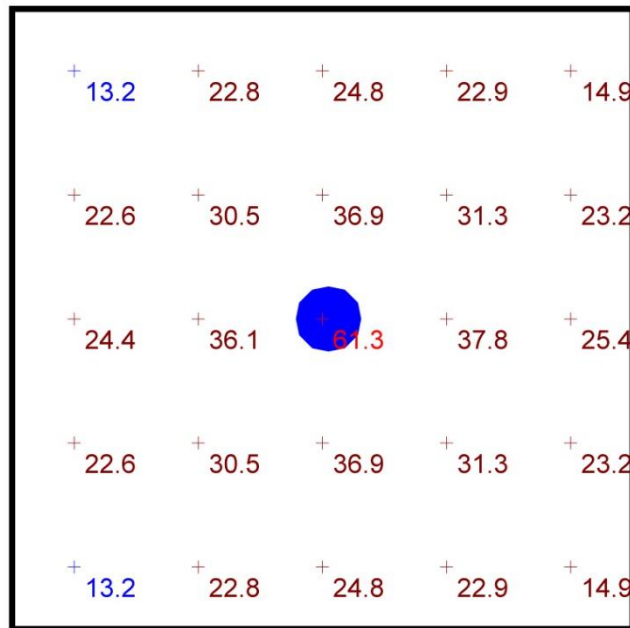

Plan View
Scale - 1" = 2ft

- 10' x 10' x 12'H space
- 80/50/20 reflectances
- bottom of fixture at 10' aff
- FC readings at 2.5' aff
- layout conducted using P4913 HI lumen package 90 cri (3260 delivered lumens)



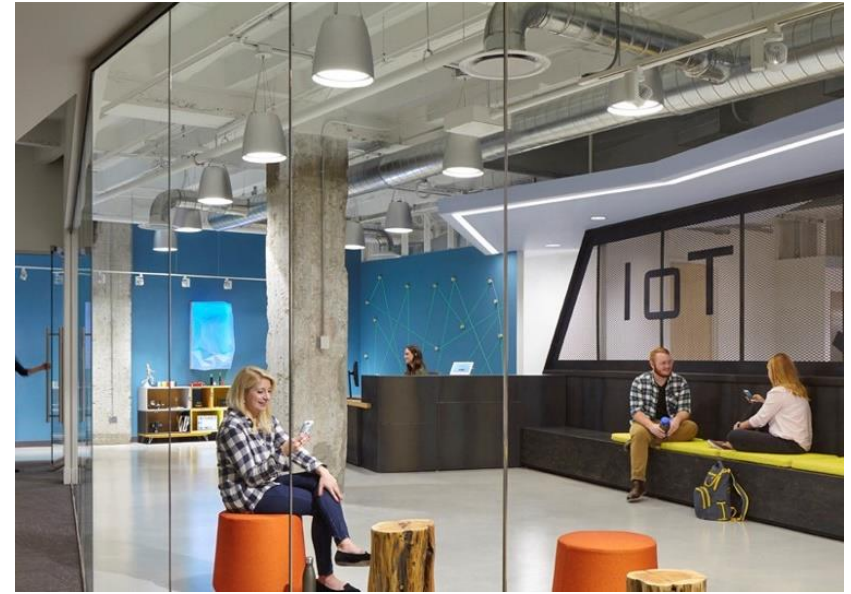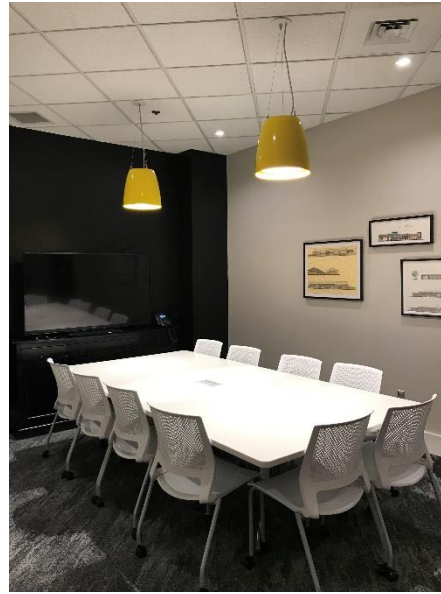

www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

top.ls.tiki™ 5-slider

