


ceiling mount

flt.maxx™ 5-slider

your lighting rep has recommended the
ceiling mount **flt.maxx™**
fixture for your project
Let's take a quick look:

sizes and lumens

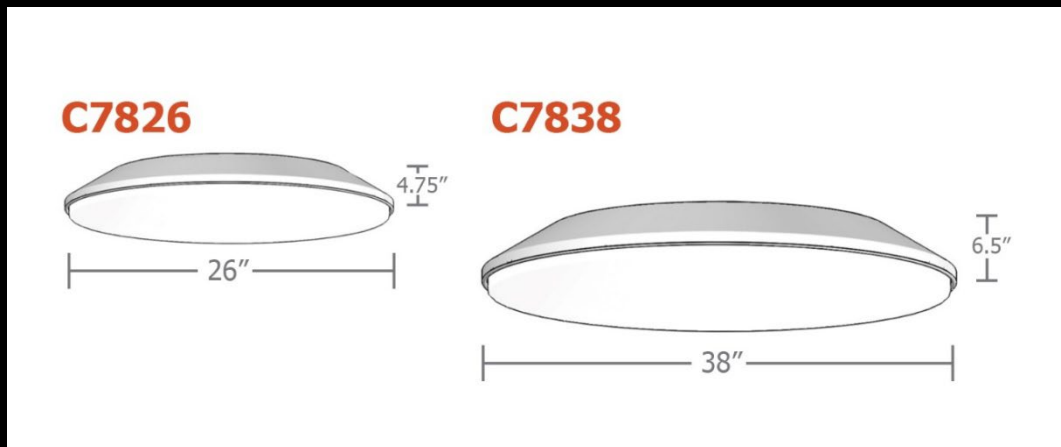

- C7826 (26") / 2340 – 7020 lm
- C7838 (36") / 4180 – 13370 lm



ceiling mount

flt.maxx™ 5-slider




construction

precision CNC spun .063"
aluminum housing w/ rolled
bottom edge for added strength

.050" aluminum array optics
platform painted in high
reflectance (>92%) matte white
powder coat

integral programmable driver,
constant current, field maintainable,
universal input (120-277), 0-10v
controllable to 1% dimming

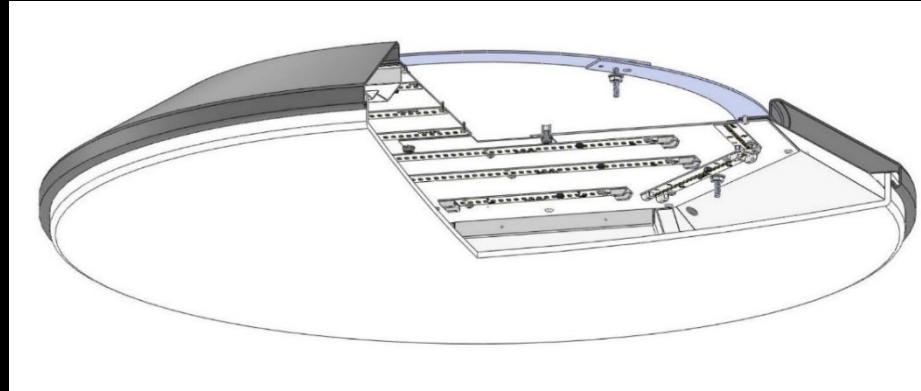

metal core LED boards
mechanically held in place
for simple field maintenance

15 standard powder coat
paint finishes
+ custom RAL colors

bottom diffuser made from virgin matte
white acrylic, secured by allen key set
screws recessed into trim ring


ceiling mount

flt.maxx™ 5-slider



performance

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
ceiling ft.maxx	+	42.2 fc	48.8 fc	36.9 fc	1.3:1	1.1:1

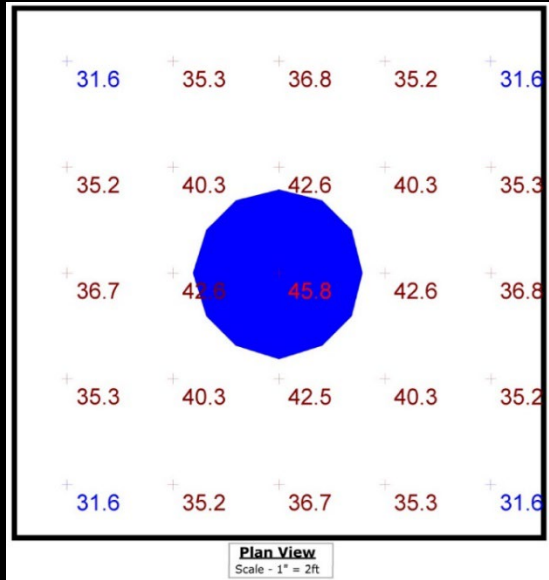

- 10' x 10' x 14'H space
- 80/50/20 reflectances
- bottom of fixture at 13.5' aff
- FC readings at 2.5' aff
- layout conducted using C7838 HI lumen package (13370 delivered lumens)





www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

ceiling mount

flt.maxx™ 5-slider

