




bul.it.XL™ 5-slider

your lighting rep has
recommended the **bul.it.XL™**
pendant for your project
Let's take a quick look:



sizes and lumens

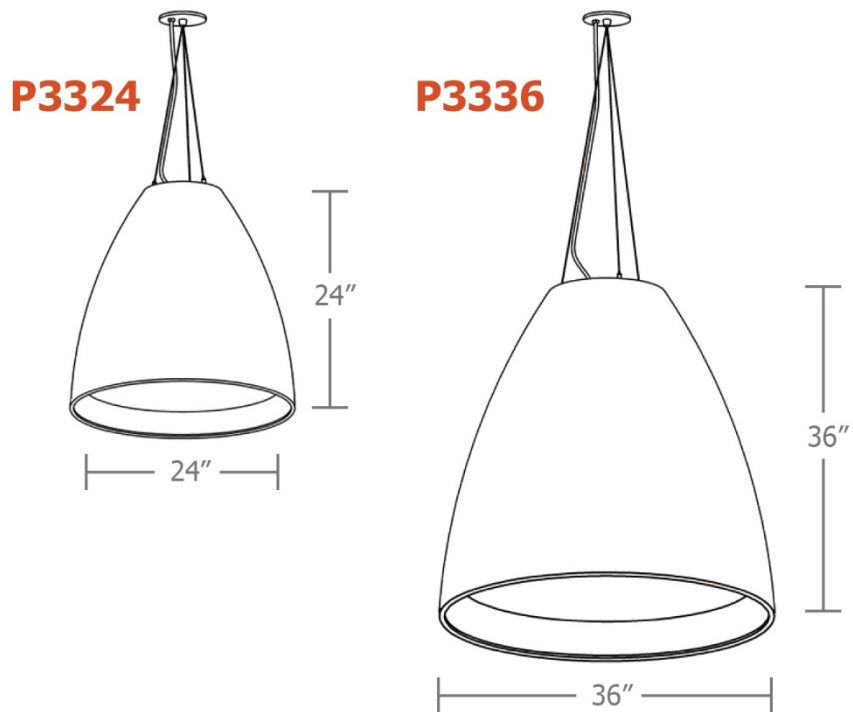

- P3324 (24") / 2000 – 7300 lm
- P3336 (36") / 2000 – 7300 lm



construction


integral programmable driver, universal input (120-277v), field maintainable, 0-10v controllable to 1% dimming.

5" dia. spun steel canopy with field adjustable tripod stainless steel cables

(POC) power over cable suspension system option provides a clean look without the need for a separate power cord

(supersized) when specifying, please consider the fact that 36" unit will not fit through a standard door. min. 42" opening required

.050" spun aluminum conical reflector optics chamber finished in high reflectance (>92%) matte white powder coat

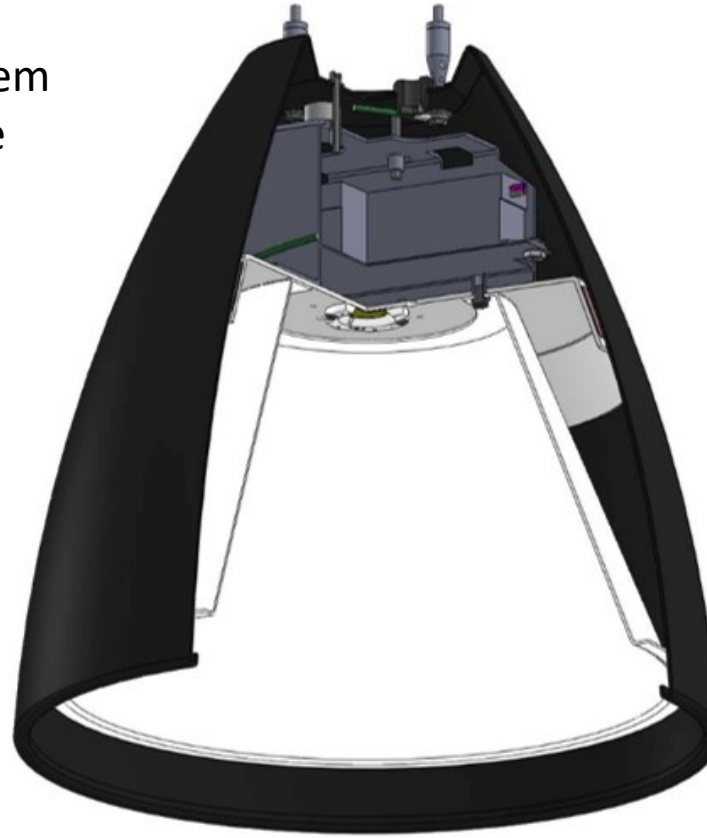

optional colored cloth power cord in blue, orange purple, red, or white/gray dot

single COB LED module in 80+ CRI standard or optional 90 CRI 2700K, 3000K, 3500K and 4000K

precision CNC spun .080" aluminum parabolic housing with bottom edge for added strength

open bottom, frosted acrylic flat lens, or open with decorative colored ring in amber, blue, frost, green, red, or yellow


21 standard powder coat paint finishes + custom RAL colors

bul.it.XL™ 5-slider



performance


Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
bul.itXL	+	32.8 fc	46.6 fc	22.7 fc	2.1:1	1.4:1

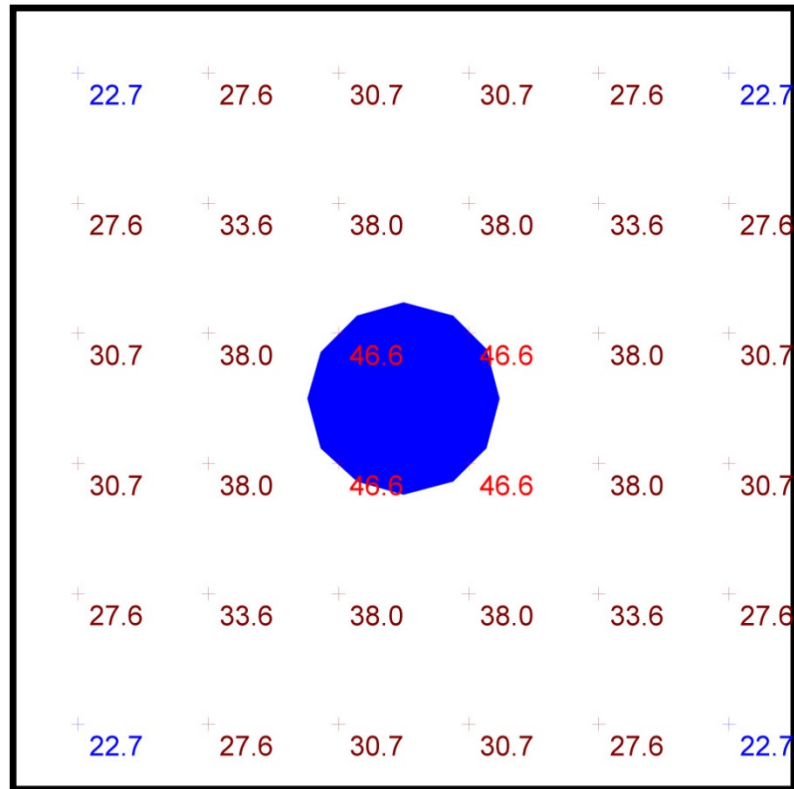

Plan View
Scale - 1" = 2ft

- 10' x 10' x 20'H space
- 80/50/20 reflectances
- bottom of fixture at 16' aff
- FC readings at 2.5' aff
- layout conducted using P3324 HX output (7300 delivered lumens)



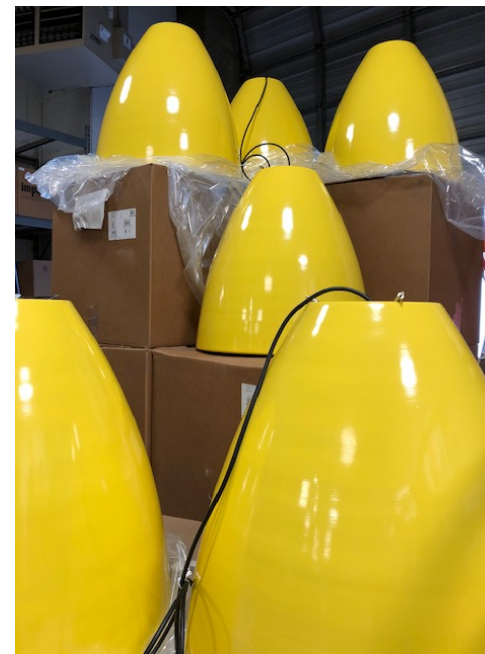

www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

bul.it.XL™ 5-slider

