




ceiling mount

wht.wal™ 5-slider

your lighting rep has recommended
the **ceiling mount** **wht.wal™** ring
fixture for your project
Let's take a quick look:



sizes and lumens

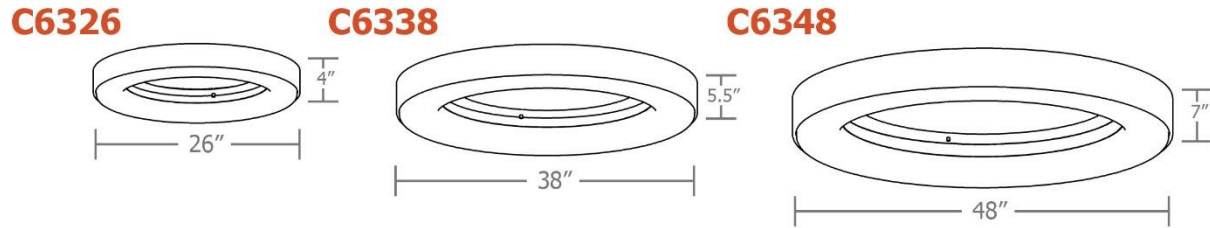

- C6326 (26") / 2620 – 4890 lm
- C6338 (38") / 2955 – 6140 lm
- C6348 (48") / 5040 – 8250 lm



ceiling mount

wht.wal™ 5-slider




construction

integral programmable drivers, constant current, universal input (120-277v), field maintainable, 0-10v controllable, 1% dimming.

mounts to standard 4" junction box

high reflectance matte white powder coat aluminum reflector

LED boards **90cri** standard 3000k, 3500k, 4000k

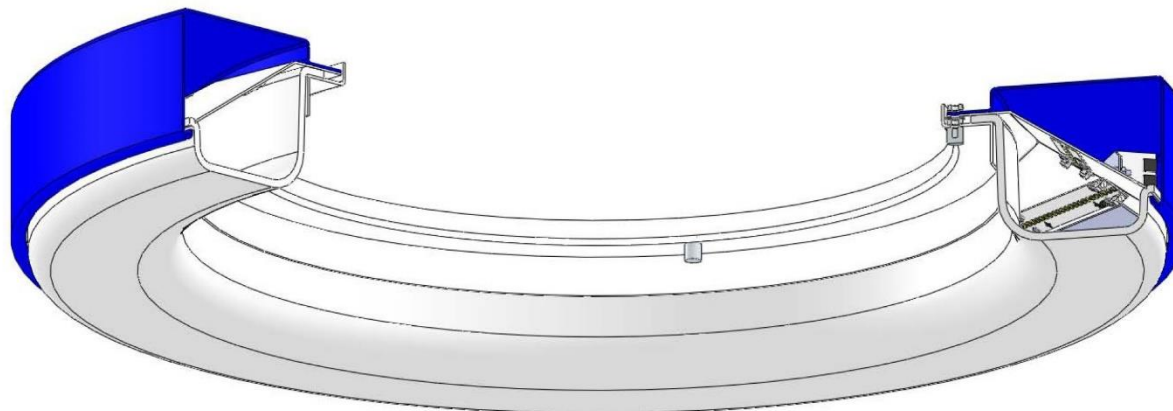

precision CNC spun .063" aluminum housing w/ rolled bottom edge for added strength

metal core LED boards mechanically held in place for easy maintenance

seamless single piece donut- shaped translucent white acrylic diffuser

15 standard powder coat paint finishes + custom RAL colors

.125 virgin white acrylic bottom/inner lens


ceiling mount

wht.wal™ 5-slider



performance

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
wht.wal ceiling mount	+	26.8 fc	36.2 fc	20.6 fc	1.8:1	1.3:1

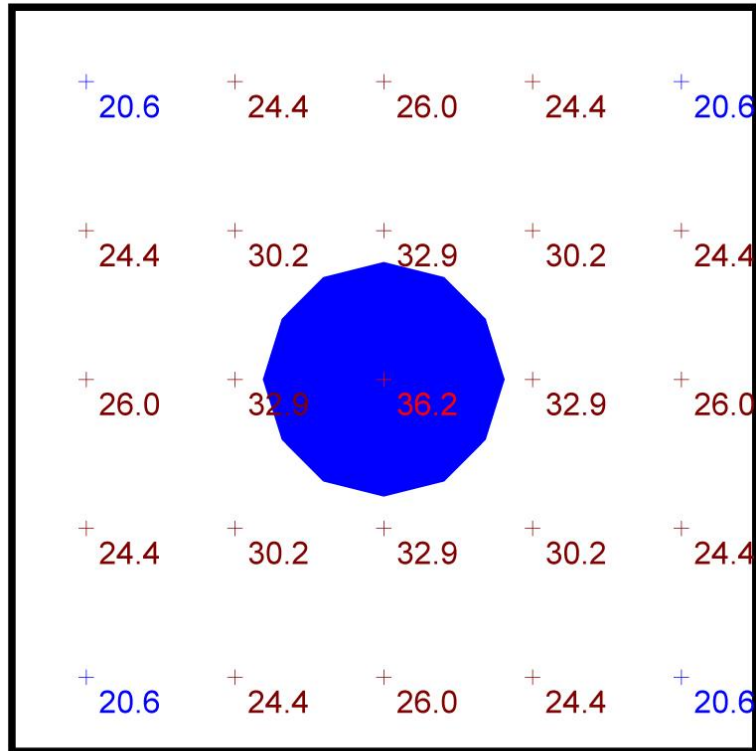

Plan View
Scale - 1" = 2ft

- 10' x 10' x 10'H space
- 80/50/20 reflectances
- ceiling mounted at 10' aff
- FC readings at 2.5' aff
- layout conducted using 38" dia. (HI) output unit delivering 6140 lumens

ceiling mount

wht.wal™ 5-slider





www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

ceiling mount

wht.wal™ 5-slider

