

job name:

type:

3.5"/6" na.row™ spec sheet 90CRI direct

material
3.5" dia. smooth extruded aluminum outer housing in five lengths, available in 15 standard powder coat paint finishes listed below. premium RAL and wood finishes also available. satin black canopy and cord standard on wood finishes.

LED
COB in 2700K, 3000K, 3500K, or 4000K 90 cri standard rated >36,000 hours L70 (6.8K) per LM-80 test data, and 71,000 hours projected life per IES TM-21.

downlight optics
LEDiL® Angelina 82mm dia 31mm high (RoHS compliant) available in 20° spot, 30° medium, 50° wide with specular anodized finish. 90° extra wide features matte white highly reflective finish. color mixing sublens standard. standard mounting clamp allows for easy replacement of reflector in field. the typical total beam angle is the full angle measured where the luminous intensity is half of the peak volume.

driver
constant current, class P, class 2 power unit, class A sound rating, universal input (120-277V) programmable driver, 5% minimum dimming level, PF >0.90. protections include short circuit, input/output isolation and surge protection (3KV). wired for 0-10v dimming from factory.

mounting standard
driver in junction box (requires 2 1/8" deep electrical box). ultrathin vertical stainless steel cable and field adjustable gripper that allow for exact AFF mounting heights. cloth-covered power cord color options listed below. cloth cord requires special stripping tool (link). 5"dia canopy painted to match fixture. satin black canopy and cord standard on wood finishes.

canopy mounted driver (CDVR) (optional)
5" dia canopy with 3.5" x 3.5" extruded aluminum painted to match fixture (see image below)

remote enclosure (.LV) (optional)
the standard driver can be remote mounted up to 33ft from the LED. suspension length should be considered in distance. remote enclosure supplied. for distances greater than 33ft consult factory. for Chicago Plenum installation consult factory.

power over cable (POC) (optional)
Class 2 LED powered suspension system that suspends and powers the fixture with thin stainless steel copper-core conductive cables, providing a clean look without the need for a separate power cord. powered suspension requires cable cutter (link) specifically designed to cut stainless steel aircraft cable from 1/32" to 1/8".

finish
select from 15 standard powder coat paint finishes or 3 wood finishes (listed below) or specify RAL# for custom colors. satin black canopy and cord standard on wood finishes.




emergency
if required, recommend use of inverter (by other).


catalog number

size	beam	CCT	lumens	painting finish	power cord	options
P7603 driver in j-box	S 20° spot	27 2700K	L1 410 lm	AP anodized paint	BUPC blue cloth cord	3FT 36" cable(s)
P7603.LV remote enclosure	M 30° med	30 3000K	L2 715 lm	BS brass	ORPC orange cloth cord	6FT 72" cable(s)
3.5"dia X 3.5"ht	W 50° wide	35 3500K	L3 1025 lm	BU blue	PLPC purple cloth cord	CDVR canopy mounted driver
	XW 90° extra wide	40 4000K	H1 1435 lm	BZ bronze	RDPC red cloth cord	
				CP champagne	WGPC white & gray dot cloth cord	
				FB flat black		
				GM gun metal	POC power over cable	
				MB military blue		
				MW matte white	WHPC white cord	
				OR orange	BKPC black cord	
				RD red	SBPC silver braid cord	
				SB satin black		
				SS satin silver		
				TG textured gray		
				YO yellow		
				premium finish		
				RAL specify RAL#		
				wood finish		
				ASH ashwood		
				ENG english brown oak		
				ESP espresso		
				satin black canopy and cord standard on wood finishes		



This product meets the guidelines for the Build America, Buy America Act. Some Exclusions Apply. For more information and full list of eligible SKUs, please contact the factory at info@impactltg.com

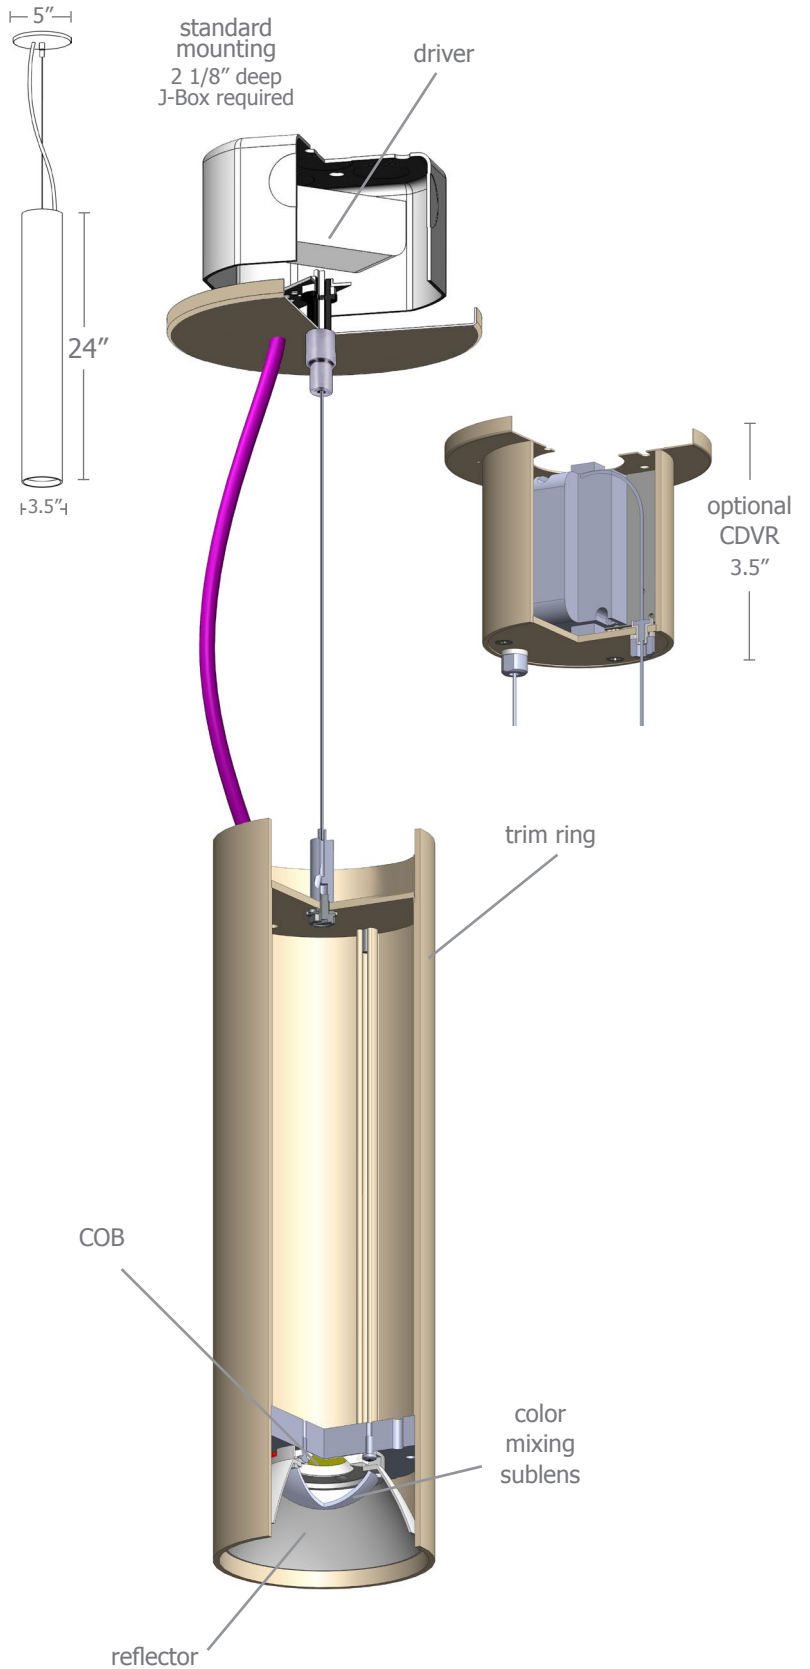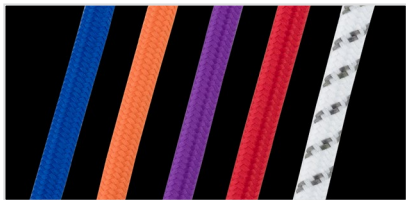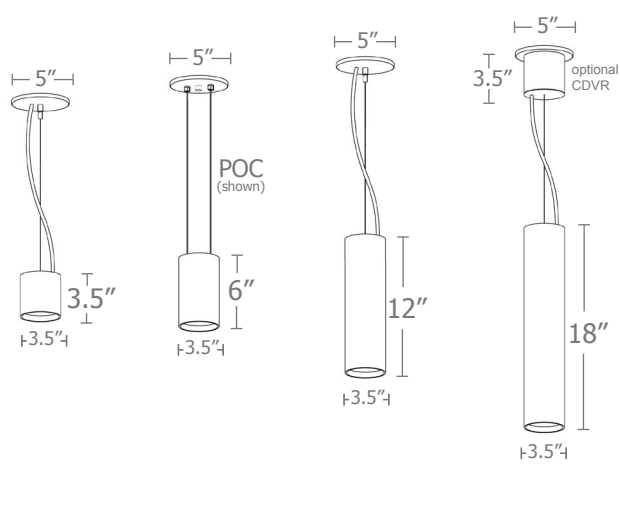


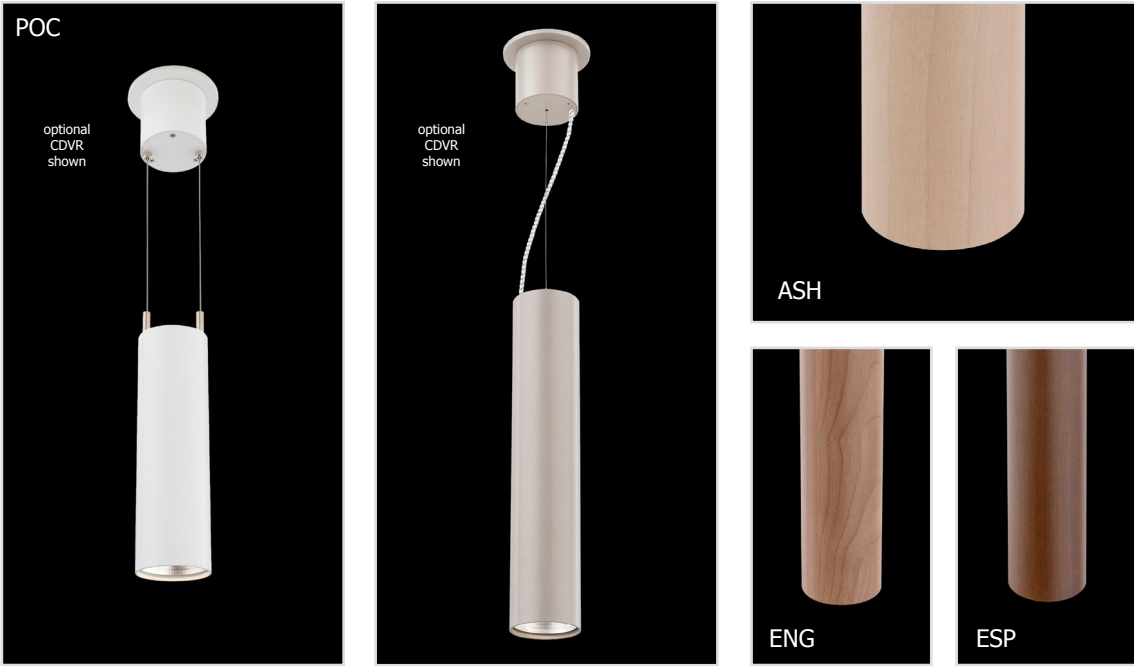

Typical Lighting Layout

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
na.row	+	27.1 fc	39.6 fc	18.5 fc	2.1:1	1.5:1

Schedule						
Symbol	Quantity	Manufacturer	Catalog Number	Description	Lamp	Wattage
	1	Impact Architectural Lighting	P7612 W 40 H3	12" length nar.ow downlight cylinder	4000k 90cri LED	28

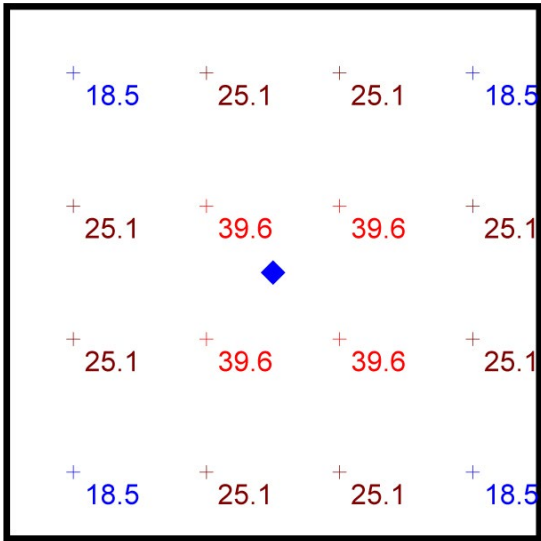

Plan View
Scale - 1" = 2ft


- 8' x 8' x 12'H space
- 80/50/20 reflectances
- bottom of fixture at 10' aff
- FC readings at 2.5' aff
- layout conducted using P7612 with 90 CRI H3 (2780 lm) with wide beam spread




Calculation Table

The application of a Light Loss Factor is required to:


- match the lumen output for the power module specified
- incorporate the increased lumen output due to LED/Driver upgrades




20921
P7506-S-40H3
S 20° spot



20922
P7506-M-40H3
M 30° med



20923
P7506-W-40H3
W 50° wide




20924
P7506-EW-40H3
xW 90° extra wide

Cat No	Delivered* Lumens	Watts 120V / 277V	IES File #	LLF to be applied
L1	410	4	20921 spot	.13
			20922 med	.13
			20923 wide	.13
			20924 x-wide	.13
L2	715	7	20921 spot	.23
			20922 med	.23
			20923 wide	.23
			20924 x-wide	.23
L3	1025	10	20921 spot	.32
			20922 med	.32
			20923 wide	.32
			20924 x-wide	.32
H1	1435	14	20921 spot	.45
			20922 med	.45
			20923 wide	.45
			20924 x-wide	.45
H2	2050	21	20921 spot	.65
			20922 med	.65
			20923 wide	.65
			20924 x-wide	.65
H3	2870	28	20921 spot	.91
			20922 med	.91
			20923 wide	.91
			20924 x-wide	.91

*delivered lumens based on 4000K, 90+ cri

Powder Coat Paint Finishes



MW matte white



AP anodized paint



SS satin silver



TG textured gray



FB flat black




SB satin black



CP champagne



BZ bronze




GM gun metal



OR orange 2011



BU blue 5017



BS brass



RD red 3020




YO yellow 1018




MB military blue

Premium Finishes*

Wood Finishes



ASH ashwood



ENG english brown oak



ESP espresso

For accurate color verification, actual finish samples are available upon request.



RAL#

*Available on select series. Consult product submittal for availability.

