

job name:

type:

6"/12" sq.too™ spec sheet 90CRI

material
2" smooth square extruded architectural 6063 aluminum outer housing in six lengths.

LED
COB in 2700K, 3000K, 3500K, or 4000K 90+ cri standard rated >36,000 hours L70 (6.8K) per LM-80 test data, and 71,000 hours projected life per IES TM-21.

downlight optics
Khatod® Cosmo 50mm dia 16mm high (RoHS compliant) available in 12° spot, 25° medium, 38° wide

driver
constant current, class P, class 2 power unit, class A sound rating, universal input (120-277V) programmable driver, 5% minimum dimming level, PF >0.90. protections include short circuit, input/output isolation and surge protection (3KV). wired for 0-10v dimming from factory.


mounting
standard
driver in junction box (requires 2 1/8" deep electrical box). 5"sq canopy painted to match fixture. rigid mount 3/8"dia stem standard. painted to match fixture. satin black canopy standard on wood finishes.

canopy mounted driver (CDVR) (optional)
2"sq x 6"h extruded aluminum driver housing on 5"sq canopy painted to match fixture. rigid mount 3/8"dia stem standard. painted to match fixture.

remote enclosure (.LV) (optional)
the standard driver can be remote mounted up to 33ft from the LED. suspension length should be considered in distance. remote enclosure supplied. for distances greater than 33ft consult factory. for Chicago Plenum installation consult factory.


finish
select from 15 standard powder coat paint finishes or 3 wood finishes (listed below) or specify RAL# for custom colors.

emergency
if required, recommend use of inverter (by other).

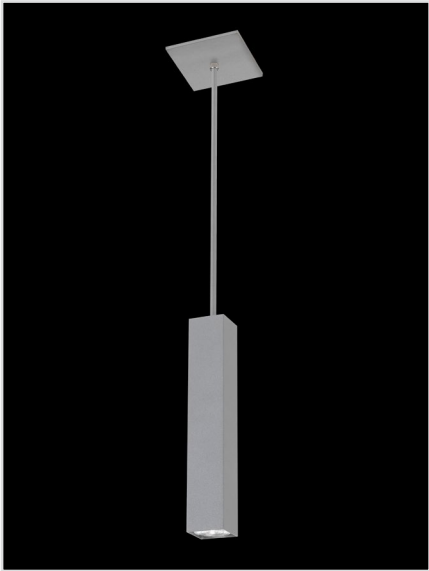

catalog number

size	beam	CCT	lumens	painted finish	options
P4006 driver in j-box	S 12° spot	27 2700K	L1 360 lm	AP anodized paint	STM1 12" stem
P4006.BABA driver in j-box	M 25° med			BS brass	STM2 24" stem
P4006.LV remote enclosure	W 38° wide	30 3000K	L2 630 lm	BU blue	STM3 36" stem
		35 3500K	L3 900 lm	BZ bronze	CDVR canopy mounted driver
P4012 driver in j-box		40 4000K	H1 1265 lm	CP champagne	
P4012.BABA driver in j-box			H2 1805 lm	FB flat black	
P4012.LV remote enclosure				GM gun metal	
				MB military blue	
				MW matte white	
				OR orange	
				RD red	
				SB satin black	
				SS satin silver	
				TG textured gray	
				YO yellow	



premium finish
RAL specify RAL#

wood finish
ASH ashwood
ENG english brown oak
ESP espresso

This product meets the guidelines for the Build America, Buy America Act. Some Exclusions Apply. For more information and full list of eligible SKUs, please contact the factory at info@impactltg.com

job name:

type:

18"/24" sq.too™ spec sheet 90CRI

material
2" smooth square extruded architectural 6063 aluminum outer housing in six lengths.

LED
COB in 2700K, 3000K, 3500K, or 4000K 90+ cri standard rated >36,000 hours L70 (6.8K) per LM-80 test data, and 71,000 hours projected life per IES TM-21.

downlight optics
Khatod® Cosmo 50mm dia 16mm high (RoHS compliant) available in 12° spot, 25° medium, 38° wide

driver
constant current, class P, class 2 power unit, class A sound rating, universal input (120-277V) programmable driver, 5% minimum dimming level, PF >0.90. protections include short circuit, input/output isolation and surge protection (3KV). wired for 0-10v dimming from factory.


mounting
standard
driver in junction box (requires 2 1/8" deep electrical box). 5"sq canopy painted to match fixture. rigid mount 3/8"dia stem standard. painted to match fixture. satin black canopy standard on wood finishes.

canopy mounted driver (CDVR) (optional)
2"sq x 6"h extruded aluminum driver housing on 5"sq canopy painted to match fixture. rigid mount 3/8"dia stem standard. painted to match fixture.

remote enclosure (.LV) (optional)
the standard driver can be remote mounted up to 33ft from the LED. suspension length should be considered in distance. remote enclosure supplied. for distances greater than 33ft consult factory. for Chicago Plenum installation consult factory.

finish
select from 15 standard powder coat paint finishes or 3 wood finishes (listed below) or specify RAL# for custom colors.


emergency
if required, recommend use of inverter (by other).

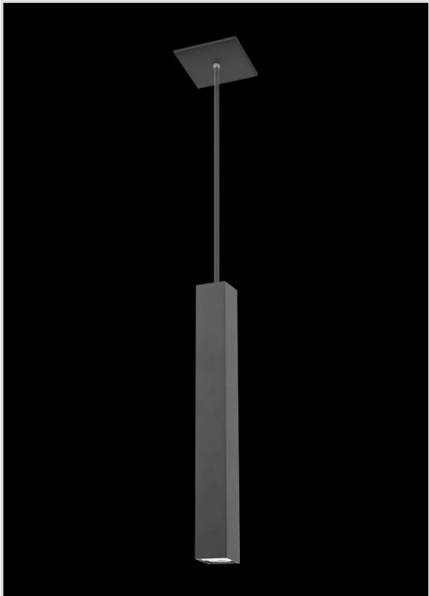

catalog number

--	--	--	--	--	--

size	beam	CCT	lumens	painting finish	options
P4018 driver in j-box	S 12° spot	27 2700K	L1 360 lm	AP anodized paint	STM1 12" stem
P4018.BABA driver in j-box	M 25° med	30 3000K	L2 630 lm	BS brass	STM2 24" stem
P4018.LV remote enclosure 2"sq X 18"ht	W 38° wide	35 3500K	L3 900 lm	BU blue	STM3 36" stem
P4024 driver in j-box		40 4000K	H1 1265 lm	BZ bronze	CDVR canopy mounted driver
P4024.BABA driver in j-box			H2 1805 lm	CP champagne	
P4024.LV remote enclosure				FB flat black	
P4024.LV.BABA* remote enclosure 2"sq X 24"ht				GM gun metal	
				MB military blue	
				MW matte white	
				OR orange	
				RD red	
				SB satin black	
				SS satin silver	
				TG textured gray	
				YO yellow	



This product meets the guidelines for the Build America, Buy America Act. Some Exclusions Apply. For more information and full list of eligible SKUs, please contact the factory at info@impactltg.com

premium finish
RAL specify RAL#

wood finish
ASH ashwood
ENG english brown oak
ESP espresso



job name:

type:

36"/48" sq.too™ spec sheet 90CRI

material
2" smooth square extruded architectural 6063 aluminum outer housing in six lengths.

LED
COB in 2700K, 3000K, 3500K, or 4000K 90+ cri standard rated >36,000 hours L70 (6.8K) per LM-80 test data, and 71,000 hours projected life per IES TM-21.

downlight optics
Khatod® Cosmo 50mm dia 16mm high (RoHS compliant) available in 12° spot, 25° medium, 38° wide

driver
constant current, class P, class 2 power unit, class A sound rating, universal input (120-277V) programmable driver, 5% minimum dimming level, PF >0.90. protections include short circuit, input/output isolation and surge protection (3KV). wired for 0-10v dimming from factory.


mounting
standard
driver in junction box (requires 2 1/8" deep electrical box). 5"sq canopy painted to match fixture. rigid mount 3/8"dia stem standard. painted to match fixture. satin black canopy standard on wood finishes.

canopy mounted driver (CDVR) (optional)
2"sq x 6"h extruded aluminum driver housing on 5"sq canopy painted to match fixture. rigid mount 3/8"dia stem standard. painted to match fixture.

remote enclosure (.LV) (optional)
the standard driver can be remote mounted up to 33ft from the LED. suspension length should be considered in distance. remote enclosure supplied. for distances greater than 33ft consult factory. for Chicago Plenum installation consult factory.

finish
select from 15 standard powder coat paint finishes or 3 wood finishes (listed below) or specify RAL# for custom colors.

emergency
if required, recommend use of inverter (by other).

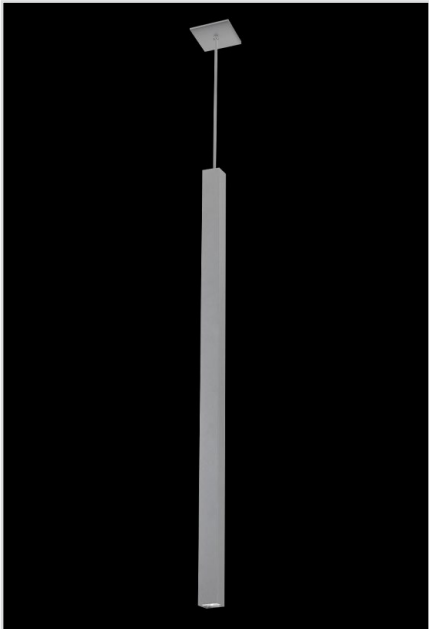


catalog number

--	--	--	--	--	--

size	beam	CCT	lumens	painted finish	options
P4036* driver in j-box	S 12° spot	27 2700K	L1 360 lm	AP anodized paint	STM1 12" stem
P4036.BABA* driver in j-box	M 25° med			BS brass	STM2 24" stem
P4036.LV* remote enclosure	W 38° wide	30 3000K	L2 630 lm	BU blue	STM3 36" stem
P4036.LV.BABA* remote enclosure		35 3500K	L3 900 lm	BZ bronze	CDVR canopy mounted driver
2"sq X 36"ht		40 4000K	H1 1265 lm	CP champagne	
P4048* driver in j-box			H2 1805 lm	FB flat black	
P4048.BABA* driver in j-box				GM gun metal	
P4048.LV* remote enclosure				MB military blue	
P4048.LV.BABA* remote enclosure				MW matte white	
2"sq X 48"ht				OR orange	
				RD red	
				SB satin black	
				SS satin silver	
				TG textured gray	
				YO yellow	



*extended lead time




premium finish
RAL specify RAL#

wood finish
ASH ashwood
ENG english brown oak
ESP espresso


This product meets the guidelines for the Build America, Buy America Act. Some Exclusions Apply. For more information and full list of eligible SKUs, please contact the factory at info@impactltg.com



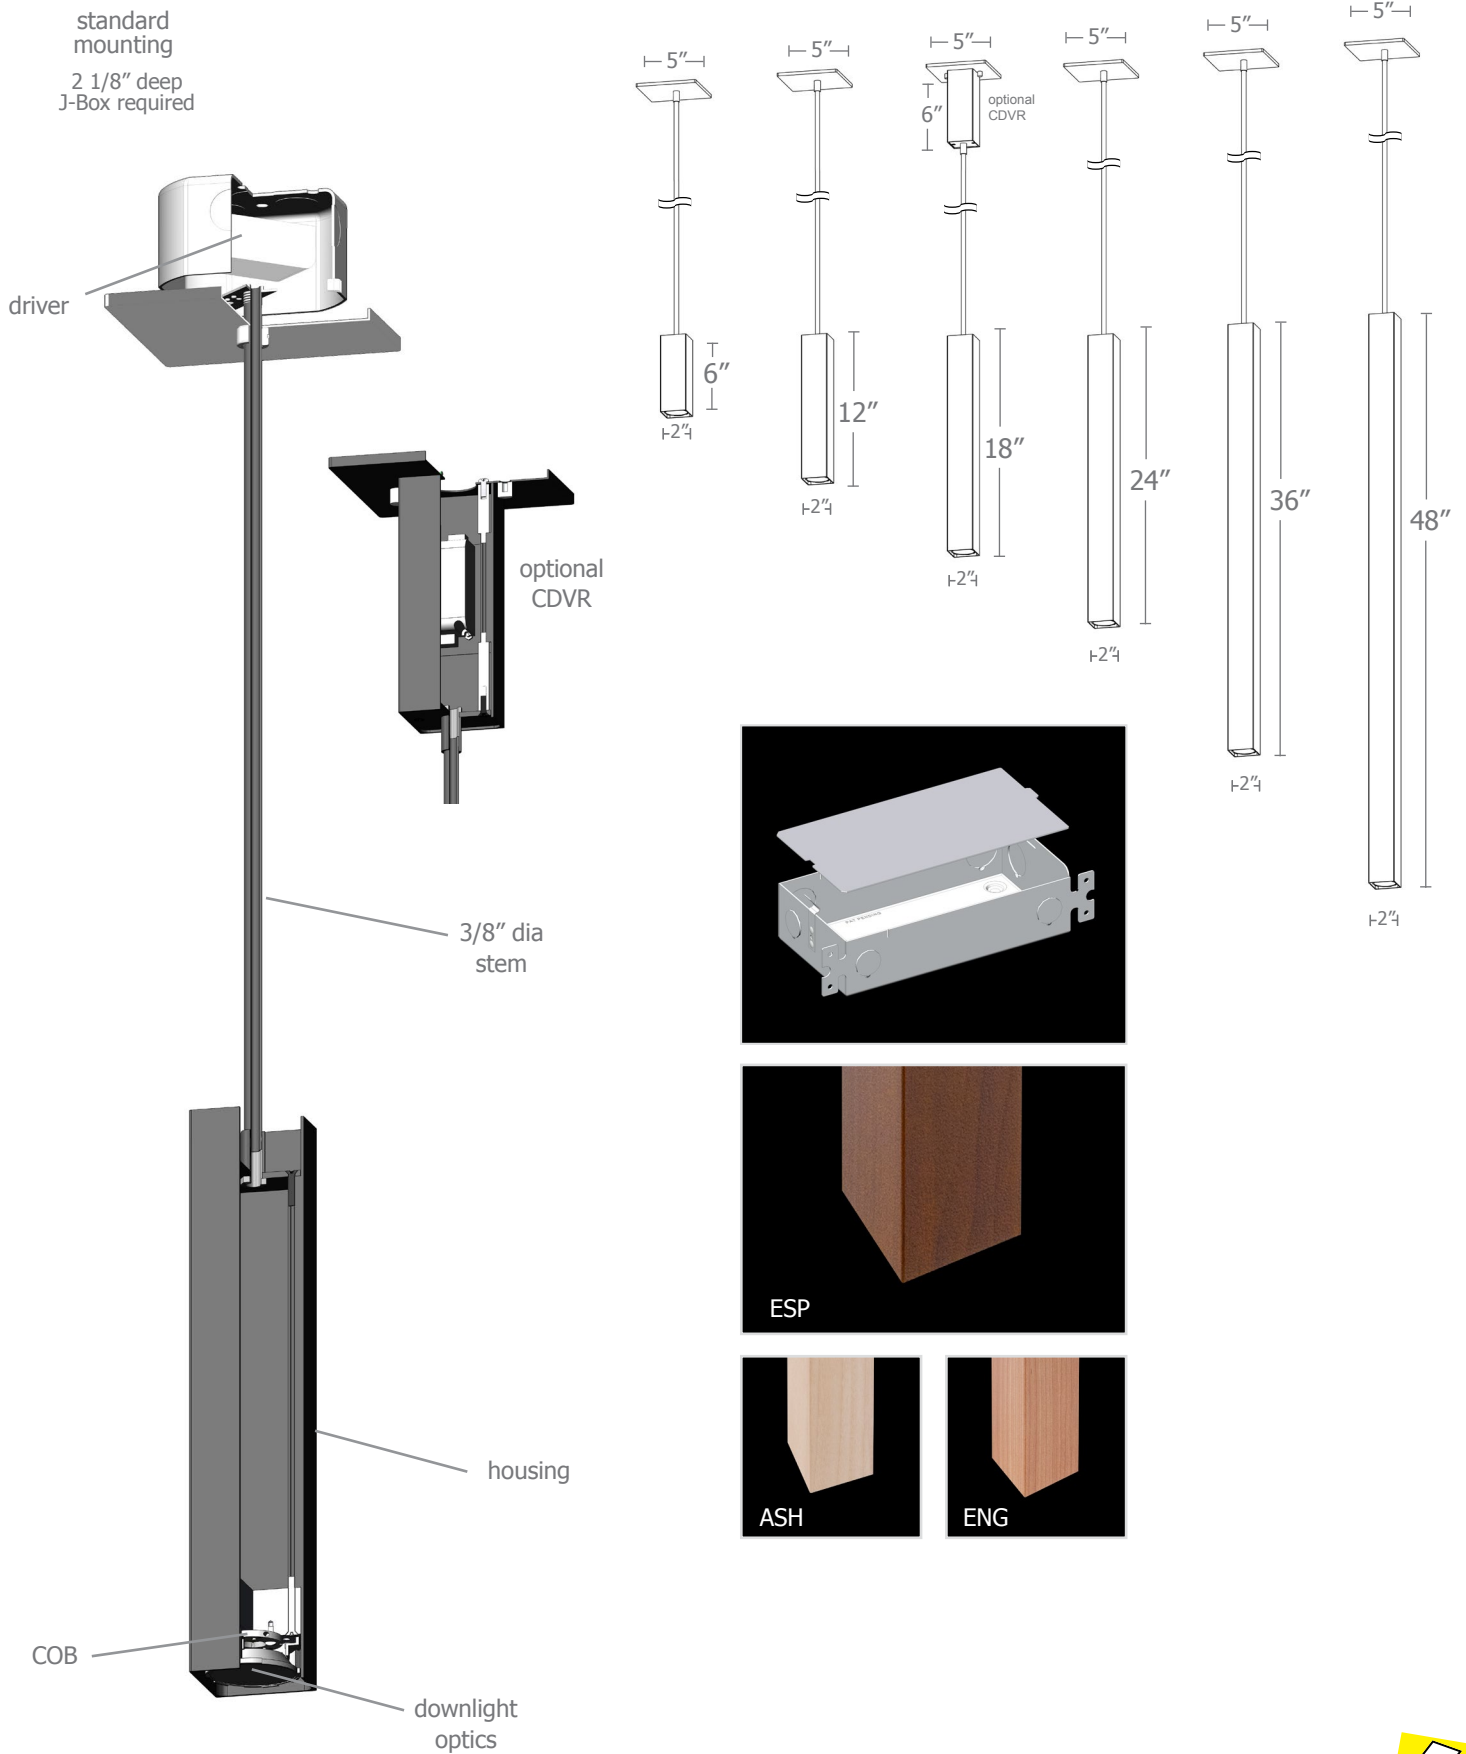

Calculation Table

Consult factory for applications assistance

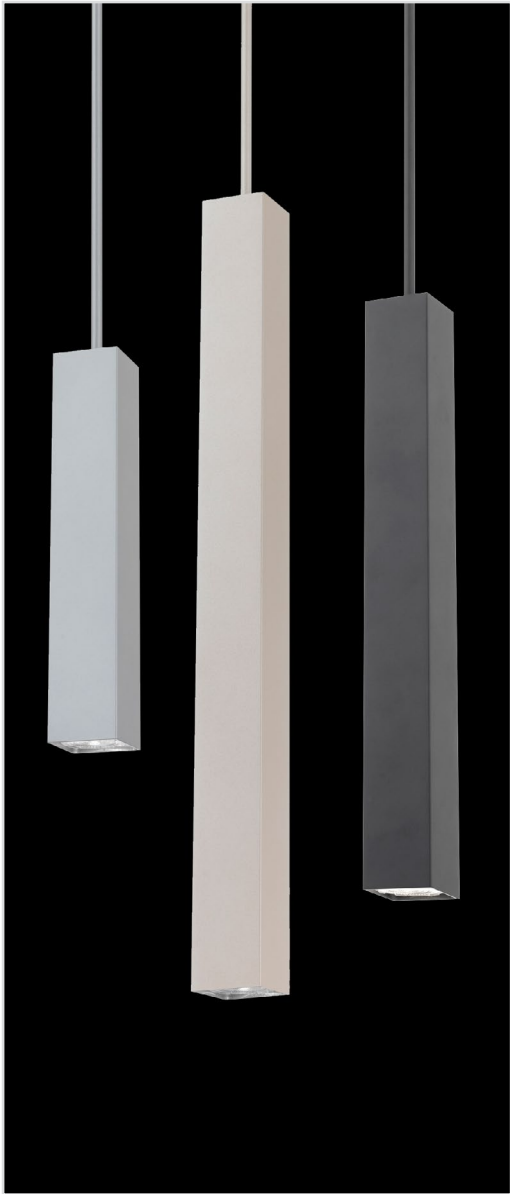


Cat No	Delivered* Lumens	Watts 120V / 277V	IES File #		LLF to be applied
L1	360	3	07222C	spot	.30
			07222B	med	.30
			07222A	wide	.30
L2	630	6	07222C	spot	.53
			07222B	med	.53
			07222A	wide	.53
L3	900	9	07222C	spot	.76
			07222B	med	.76
			07222A	wide	.76
H1	1265	13	07222C	spot	1.07
			07222B	med	1.07
			07222A	wide	1.07
H2	1805	19	07222C	spot	1.52
			07222B	med	1.52
			07222A	wide	1.52


*delivered lumens based on 4000K, 90+ cri

The application of a Light Loss Factor is required to:


- match the lumen output for the power module specified
- incorporate the increased lumen output due to LED/Driver upgrades



07222C
P40xx-S-40H1
S 12° spot




07222B
P40xx-M-40H1
M 25° med



07222A
P40xx-W-40H1
W 38° wide



Powder Coat Paint Finishes



MW matte white




AP anodized paint



SS satin silver



TG textured gray




FB flat black



SB satin black



CP champagne



BZ bronze



GM gun metal



OR orange 2011



BU blue 5017



BS brass



RD red 3020




YO yellow 1018



MB military blue

Premium Finishes*


Wood Finishes



ASH ashwood



ENG english brown oak



ESP espresso

For accurate color verification, actual finish samples are available upon request.



RAL#

*Available on select series. Consult product submittal for availability.

