

--

job name:

type:

36"/48" wāf.r.3™ spec sheet 90CRI

material
trim ring
minimal 3" h roll formed aluminum extrusion. 6061 T1 alloy. .100 typ. wall.

diffuser
satinice WD855 72% light transmission, light scattering, glare reduction, colorless diffusion acrylic.


optics
reflector
.080" aluminum array platform painted high reflectance (>92%) matte white powder coat provides 100% downlight. for uplight, specify under options.

LED
specification-grade LED modules with integrated wide angle optics to minimize diffusion depth and increase illumination uniformity. 90+ CRI. L80>72,000 hrs. 3000K, 3500K, 4000K.

driver
integral, programmable, UL class P, class2, universal input (120-277v), constant current, 0-10v controllable, 1% minimum dimming level. complies with Energy Star®, DLC (DesignLights Consortium™), and CA Title 24 technical requirements.



mounting
5" dia. spun steel canopy in satin white is designed to mount to a 4" octagon junction box (by other). tripod suspension of stainless steel cables attach to reflector with field adjustable grippers that allow for exact AFF mounting heights. slip ring coupler allows for easy wire connections. or select 12ft adjustable suspension. (drawing below)




emergency
recommend use of inverter (by other). optional WREM: wired for remote EM battery (by other).

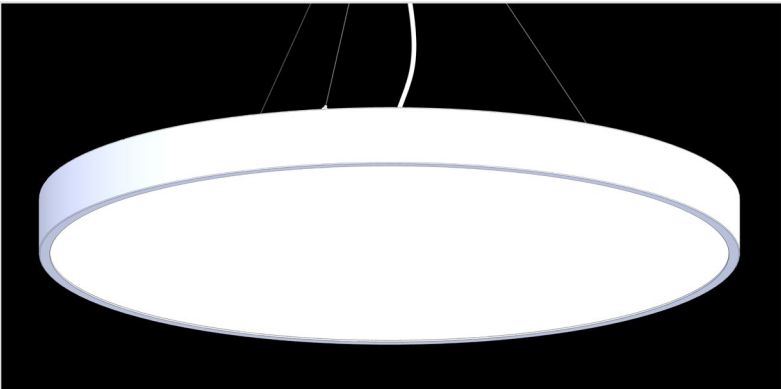


catalog number

size	CCT	lumens	painted finish	power cord	options
P5636 (3ft) 36"dia X 3"ht	30 3000K 35 3500K 40 4000K	FX 4930 lm LO 7395 lm HI 9255 lm HX 13935 lm CL xxxx lm custom lumens consult factory 4930 - 13935 lm	AP anodized paint BS brass BU blue BZ bronze CP champagne FB flat black GM gun metal MB military blue MW matte white OR orange RD red SB satin black SS satin silver TG textured gray YO yellow	WHPC white power cord and canopy BKPC black power cord and canopy SBPC silver braid power cord and white canopy	6FT 72" cables 12FT 12ft adj suspension WREM wired for remote EM battery pack (by other) (see note above) ELD EldoLED* LUT Lutron* *consult factory
P5648 (4ft) 48"dia X 3"ht	30 3000K 35 3500K 40 4000K	FX 8100 lm LO 11660 lm HI 14815 lm HX 23020 lm CL xxxx lm custom lumens consult factory 8100 - 23020 lm	premium finish RAL specify RAL# wood finish ASH ashwood ENG english brown oak ESP espresso		



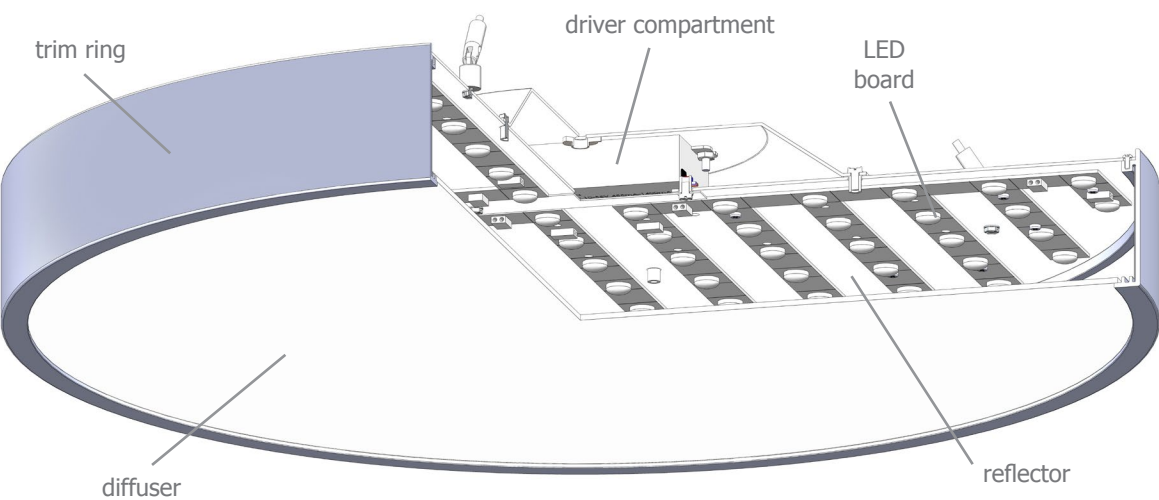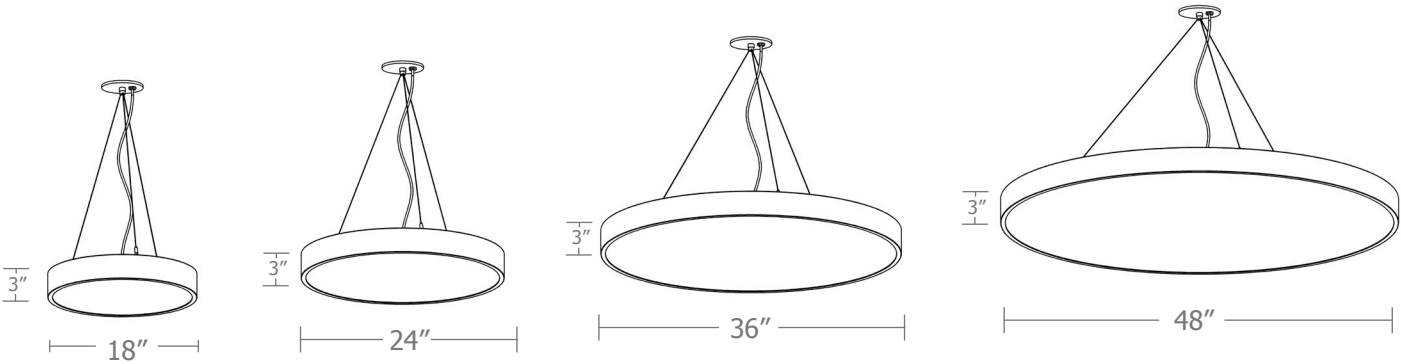

Powder Coat Paint Finishes



MW matte white



AP anodized paint



SS satin silver



TG textured gray



FB flat black




SB satin black



CP champagne



BZ bronze



GM gun metal



OR orange 2011



BU blue 5017



BS brass



RD red 3020




YO yellow 1018




MB military blue

Premium Finishes*


Wood Finishes



ASH ashwood



ENG english brown oak



ESP espresso

For accurate color verification, actual finish samples are available upon request.



RAL#

*Available on select series. Consult product submittal for availability.

