

job name:

type:

30" sprok.it™ spec sheet 90CRI

material
acoustic fin
polyethylene terephthalate (PET) 12mm thick made from recycled material. 14 color options available. NRC rating: 0.25-0.75. Fireproof Level: B1

trim ring
wafer thin 3" h roll formed aluminum extrusion. 6061 T1 alloy. .100 typ. wall. available in 15 standard powder coat paint finishes listed below. premium RAL also available.

diffuser
satinice WD855 minimum 72% light transmission, light scattering, glare reduction, colorless diffusion acrylic.

optics
reflector
.064" aluminum array platform painted high reflectance (>92%) matte white powder coat provides 100% downlight. for uplight, specify under options.

LED
specification-grade LED modules with integrated batwing optics to minimize diffusion depth and increase illumination uniformity. 90+ CRI. L80>72,000 hrs. 3000K, 3500K, 4000K. white power cord standard.

driver
integral, programmable, UL class P, class2, universal input (120-277v), constant current, 0-10v controllable, 1% minimum dimming level.

mounting
5" dia. spun steel canopy in satin white is designed to mount to a 4" octagon junction box (by other). 6' tripod suspension of stainless steel cables attaches to reflector with field adjustable grippers that allow for exact AFF mounting heights. slip ring coupler at ceiling allows for easy wire connections. or select 12ft adjustable suspension (drawing below). white power cord standard.


finish
select from 15 standard powder coat paint finishes listed below.

emergency
recommend use of inverter (by other). optional WREM: wired for remote EM battery (by other).



catalog number

size	fin shape	fin color	CCT	lumens	painted finish	options
P2030 24"dia X 3"ht light engine	BG boomerang	designer	30 3000K	FX 2700 lm	AP anodized paint	6FT 72" adj cables
	FL foil	SBA sesame black	35 3500K	LO 4100 lm	BS brass	12FT 12ft adj suspension
See p.2 for info on P2042	RR rotor	SGA silver gray	40 4000K	HI 4900 lm	BU blue	BKPC black power cord and canopy
	TR taper	PCA peacock		HX 7000 lm	BZ bronze	SBPC silver braid power cord and white canopy
		OCA ocean		CL xxxx lm custom lumens consult factory 2700 - 7000 lm	CP champagne	WREM wired for remote EM battery pack (by other) (see note above)
		SDA sand dune			FB flat black	ELD EldoLED*
		CFA coffee			GM gun metal	LUT Lutron* *consult factory
		SWA seaweed			MB military blue	
		primary			MW matte white	
		RDA red			OR orange	
		ORA orange			RD red	
		OYA orange yellow			SB satin black	
		GRA green			SS satin silver	
		SKA sky blue			TG textured gray	
		BUA blue			YO yellow	
		PRA purple				



job name:

type:

42" sprok.it™ spec sheet 90CRI

material

acoustic fin
polyethylene terephthalate (PET) 12mm thick made from recycled material. 14 color options available. NRC rating: 0.25-0.75. Fireproof Level: B1

trim ring
wafer thin 3"th roll formed aluminum extrusion. 6061 T1 alloy. .100 typ. wall. available in 15 standard powder coat paint finishes listed below. premium RAL and wood finishes also available.

diffuser
satinice WD855 minimum 72% light transmission, light scattering, glare reduction, colorless diffusion acrylic.

optics

reflector
.080" aluminum array platform painted high reflectance (>92%) matte white powder coat provides 100% downlight. for uplight, specify under options.


LED
specification-grade LED modules with integrated batwing optics to minimize diffusion depth and increase illumination uniformity. 90+ CRI. L80>72,000 hrs. 3000K, 3500K, 4000K. white power cord standard.

driver
integral, programmable, UL class P, class2, universal input (120-277v), constant current, 0-10v controllable, 1% minimum dimming level.

mounting
5" dia. spun steel canopy in satin white is designed to mount to a 4" octagon junction box (by other). 6' tripod suspension of stainless steel cables attaches to reflector with field adjustable grippers that allow for exact AFF mounting heights. slip ring coupler at ceiling allows for easy wire connections. or select 12ft adjustable suspension (drawing below). white power cord standard.

finish
select from 15 standard powder coat paint finishes listed below.


emergency
recommend use of inverter (by other). optional WREM: wired for remote EM battery (by other).

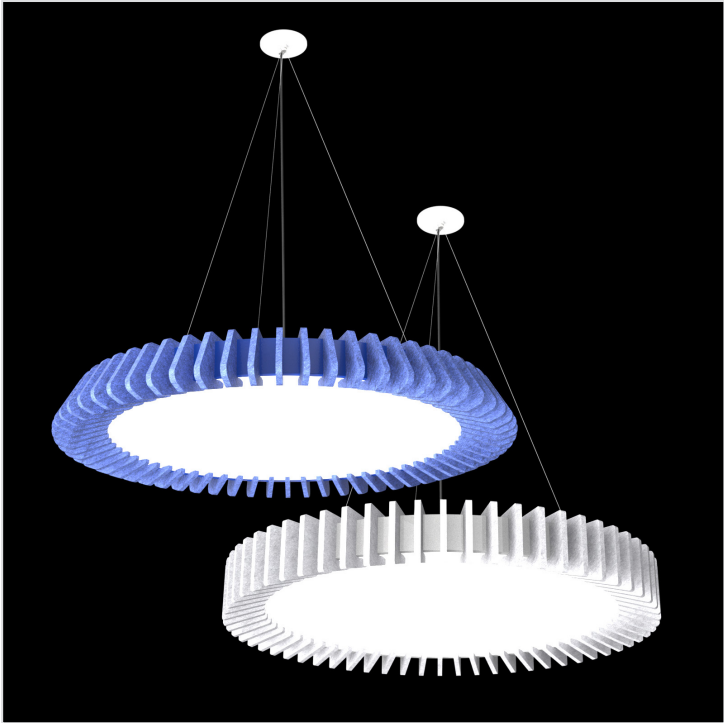

catalog number

size	fin shape	fin color	CCT	lumens	paint finish	options
P2042 36"dia X 3"ht light engine	BG boomerang 	designer SBA sesame black SGA silver gray PCA peacock OCA ocean SDA sand dune CFA coffee SWA seaweed primary RDA red ORA orange OYA orange yellow GRA green SKA sky blue BUA blue PRA purple	30 3000K 35 3500K 40 4000K	FX 4900 lm LO 7400 lm HI 9200 lm HX 13900 lm CL xxxx lm custom lumens consult factory 4900 - 13900 lm	AP anodized paint BS brass BU blue BZ bronze CP champagne FB flat black GM gun metal MB military blue MW matte white OR orange RD red SB satin black SS satin silver TG textured gray YO yellow	6FT 72" adj cables 12FT 12ft adj suspension BKPC black power cord and canopy SBPC silver braid power cord and white canopy WREM wired for remote EM battery pack (by other) (see note above) ELD EldoLED* LUT Lutron* *consult factory




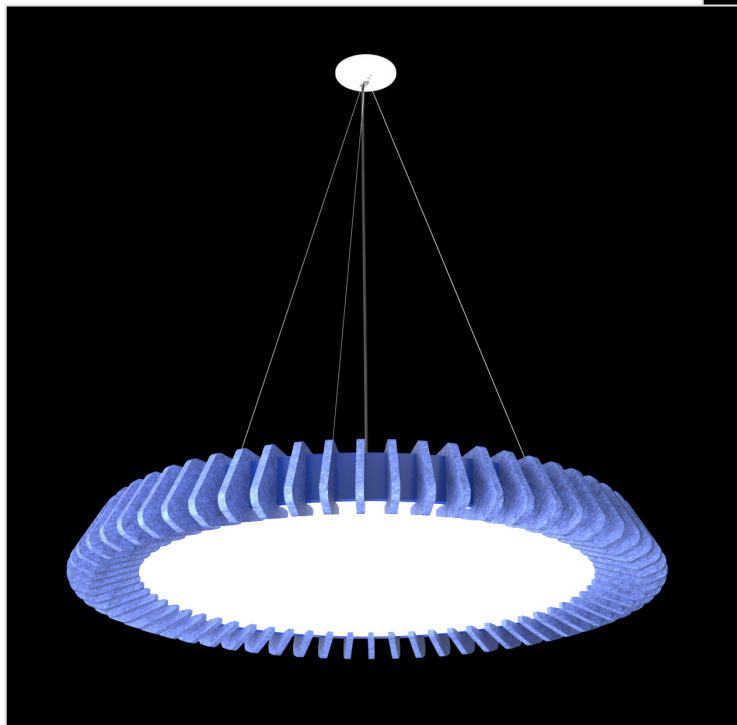

taper (TR)



boomerang (BG)

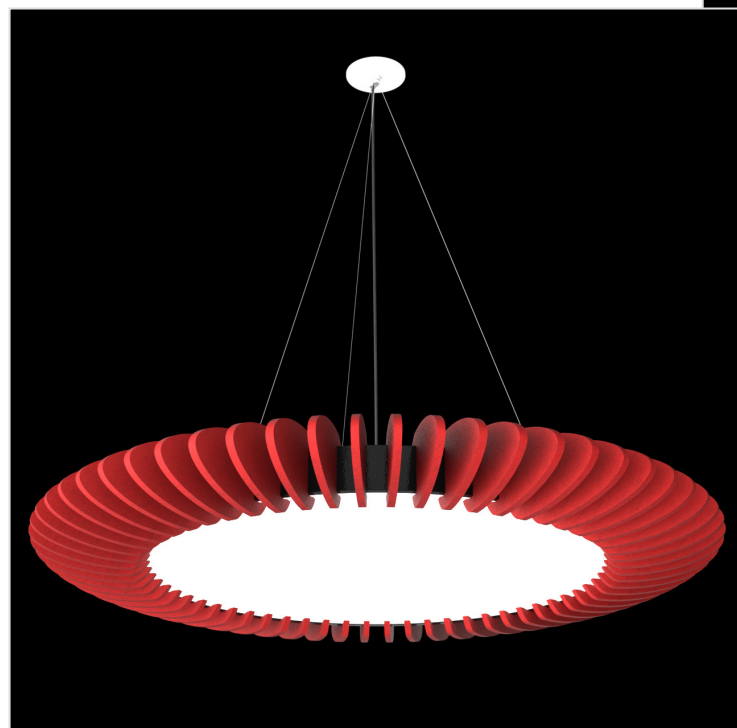


foil (FL)





rotor (RR)



boomerang (BG)

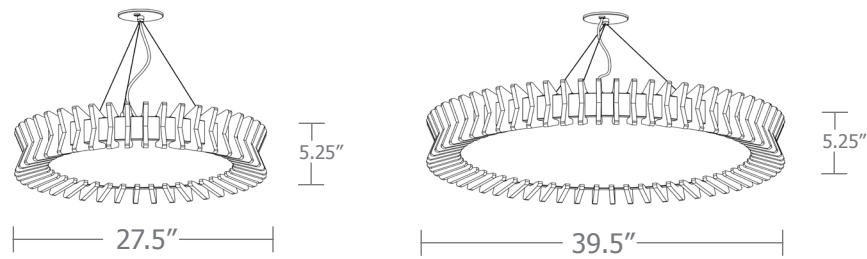


taper (TR)


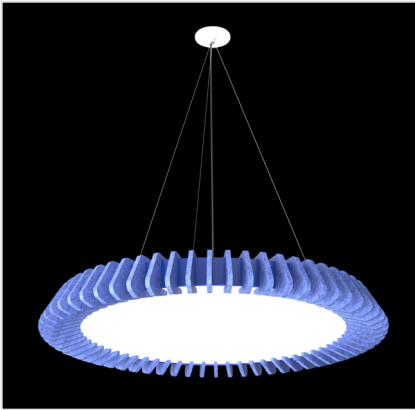
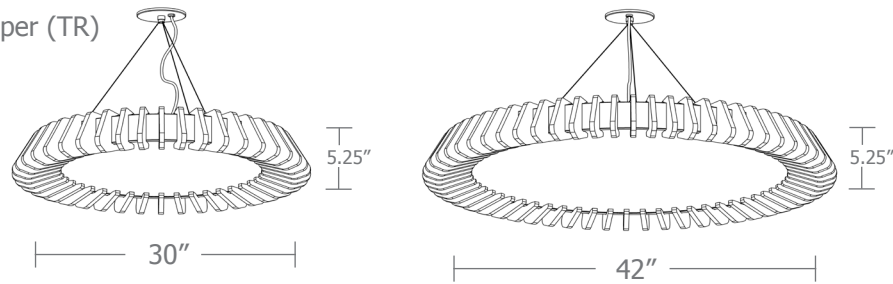


foil (FL)

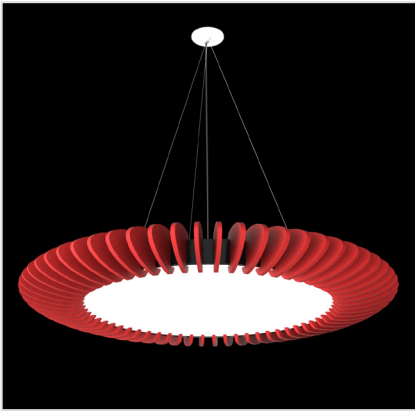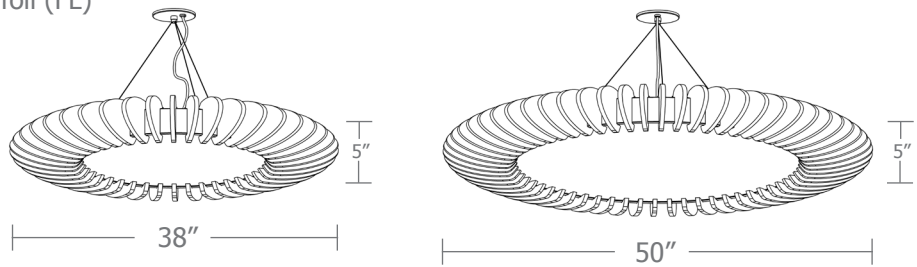

rotor (RR)

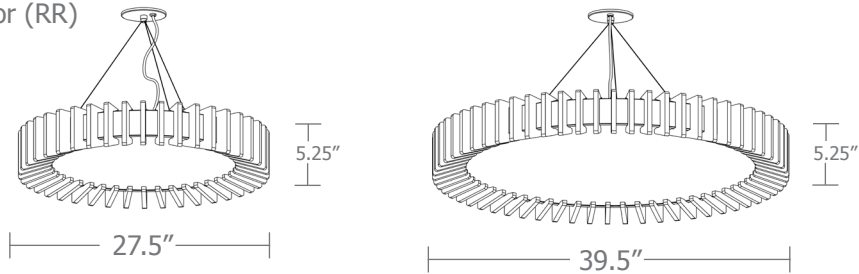


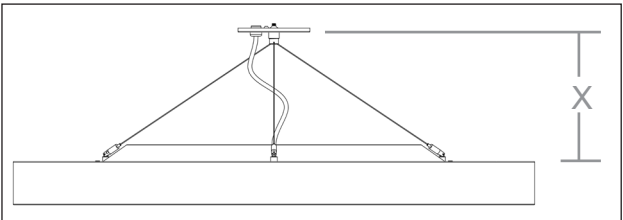
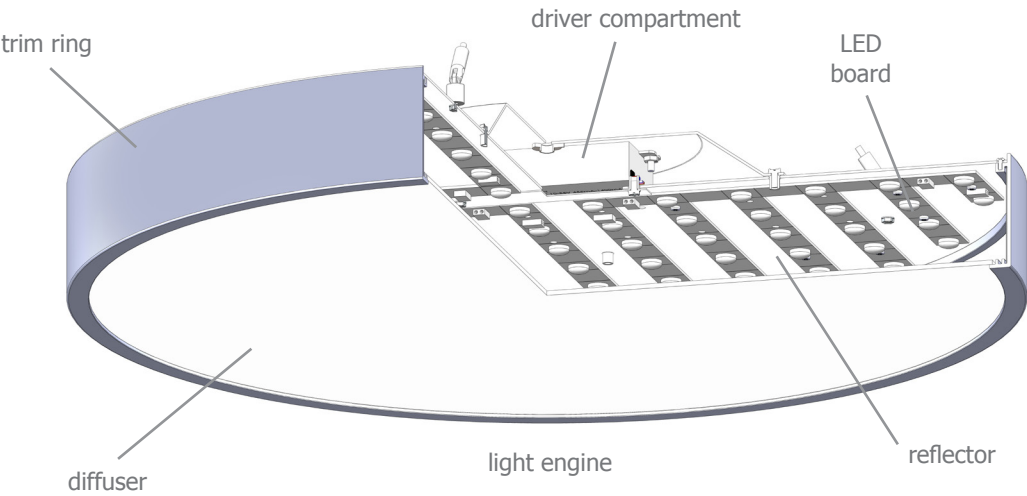
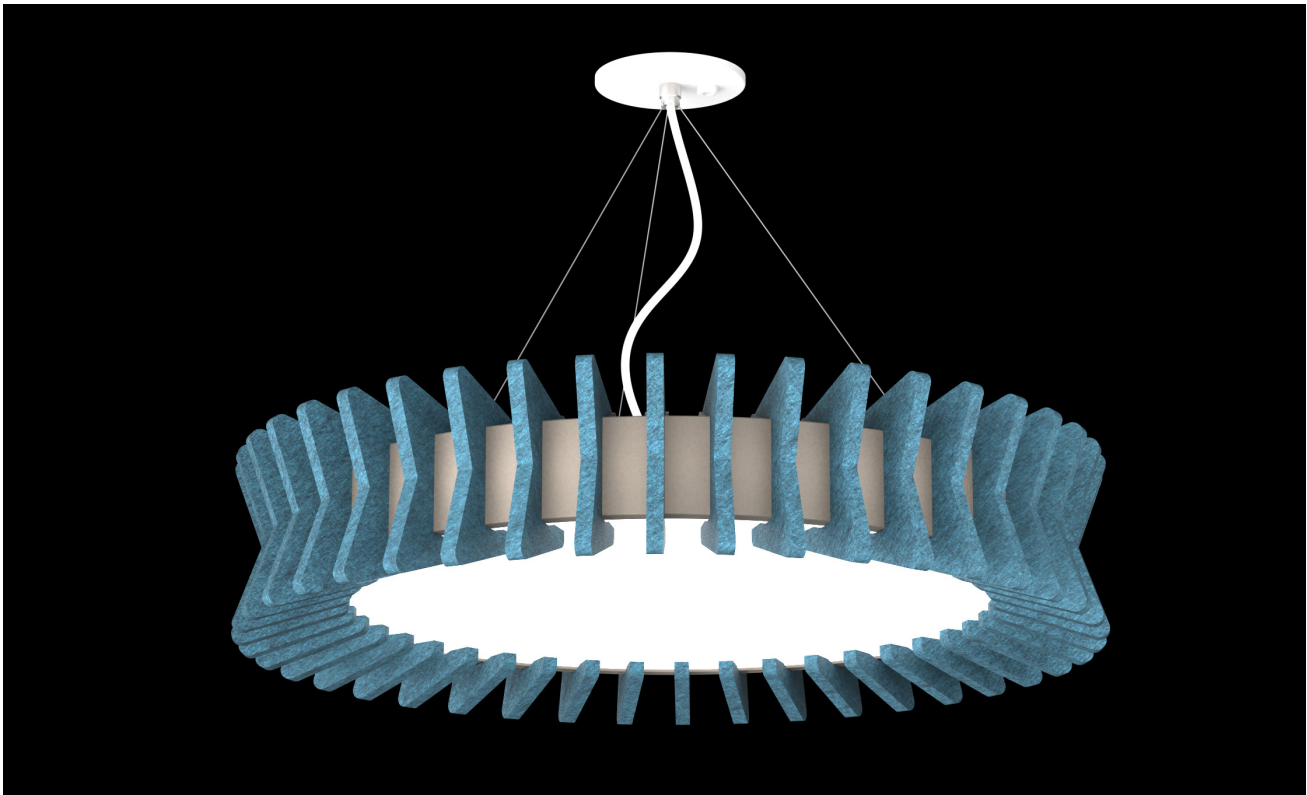


min. suspension length.







	X
P2030	6.5"
P2042	9"



Acoustic Colors

designer		primary	
	SBA sesame black		RDA red
	SGA silver gray		ORA orange
	PCA peacock		OYA orange yellow
	OCA ocean		GRA green
	SDA sand dune		SKA sky blue
	CFA coffee		BUA blue
	SWA seaweed		PRA purple

Powder Coat Paint Finishes

		
MW matte white	AP anodized paint	SS satin silver
		
TG textured gray	FB flat black	SB satin black
		
CP champagne	BZ bronze	GM gun metal
		
OR orange 2011	BU blue 5017	BS brass
		
RD red 3020	YO yellow 1018	MB military blue

For accurate color verification, actual finish samples are available upon request.

