

job name:   
 type:

## glo.stk.4.hrz™ spec sheet 90CRI

### LED

flexible planar LED lighting sheet in 3000K, 3500K, or 4000K (90+ CRI standard), utilizing emitters rated at >77,000hrs L70 per TM21-11 from LM80 data. white power cord standard. optional power cords listed below.

### end caps

ribbed extruded aluminum end caps available in silver anodized and black anodized finish. or choose from 12 standard painted finishes listed below.

### driver

in canopy, class 2, class P universal input (120-277v), constant current, 0-10v dimming, 1% minimum dimming level, PF >.9, THD <20%, protections include open and short circuit, overload and over temperature.

### diffuser

4" dia. .118" Satinice white acrylic cylinder, featuring light diffusion beads evenly distributed throughout the material for optimum light diffusion.

### finish


select from 2 anodized and 12 standard powder coat paint finishes listed below or specify RAL# for custom colors.

### mounting

7" dia. spun .064" aluminum canopy in matte white, 2 pt stainless steel cables and field adjustable grippers that allow for exact AFF mounting heights. non-powerfeed leg has 2" satin white canopy at top.


### emergency



recommend use of inverter (by other).  
 optional WREM: wired for remote EM battery (by other).

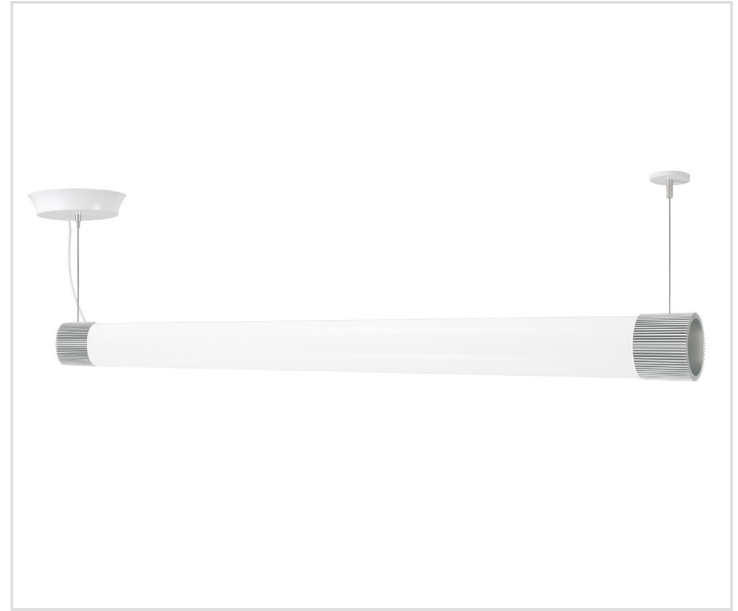

## catalog number

size	CCT	lumens	anodized finishes	power cord	options
<b>P8624 (2ft)</b> 4"dia X 31"long	<b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	<b>LO</b> 1400 lm <b>HI</b> 2150 lm <b>CL*</b> xxxx lm (940lm-3200lm) <small>custom lumens consult factory</small>	<b>AN</b> silver anodized <b>ANB</b> anodized black	<b>WHPC</b> White power cord and canopy <b>SBPC</b> Silver braid power cord and white canopy <b>BKPC</b> Black power cord and canopy	<b>6FT</b> 72" cables <b>12FT</b> 144" cables <b>WREM</b> wired for remote EM battery pack <small>(by other) (see note above)</small>
<b>P8648 (4ft)</b> 4"dia X 55"long	<b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	<b>LO</b> 2400 lm <b>HI</b> 4300 lm <b>CL*</b> xxxx lm (1900lm-6450lm) <small>custom lumens consult factory</small>	<b>BS</b> brass <b>BU</b> blue <b>BZ</b> bronze <b>CP</b> champagne <b>GM</b> gun metal <b>MB</b> military blue <b>MW</b> matte white <b>OR</b> orange <b>RD</b> red <b>SS</b> satin silver <b>TG</b> textured gray <b>YO</b> yellow		
<b>P8672 (6ft)</b> 4"dia X 79"long	<b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	<b>LO</b> 3600 lm <b>HI</b> 6450 lm <b>HX</b> 7500 lm <b>CL*</b> xxxx lm (3000lm-9100lm) <small>custom lumens consult factory</small>	<b>premium finish</b> <b>RAL</b> specify RAL#		



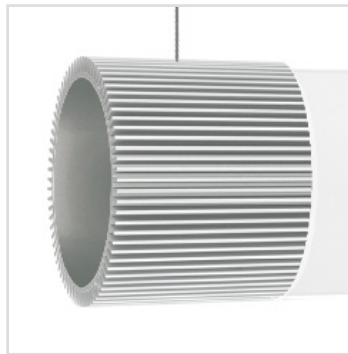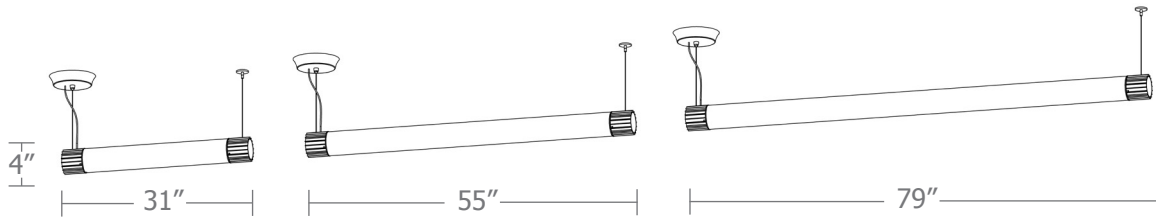

Cat No	Delivered* Lumens	Watts 120V / 277V	IES File #	LLF to be applied
<b>P8624 LO</b>	1400	15	<b>12205</b>	.63
<b>P8624 HI</b>	2150	23	<b>12205</b>	.98
<b>P8648 LO</b>	2400	25	<b>12207</b>	.62
<b>P8648 HI</b>	4300	45	<b>12207</b>	1.06
<b>P8672 LO</b>	3600	38	<b>12267</b>	.59
<b>P8672 HI</b>	6450	68	<b>12267</b>	.94
<b>P8672 HX</b>	7500	79	<b>12267</b>	1.17

\*delivered lumens based on 4000K, 90 cri

