



## tiki.aura™ 5-slider

your lighting rep has recommended  
the award winning  
**tiki.aura™** direct/indirect  
pendant for your project  
Let's take a quick look:




## sizes and lumens


**P4109**



**P4113**

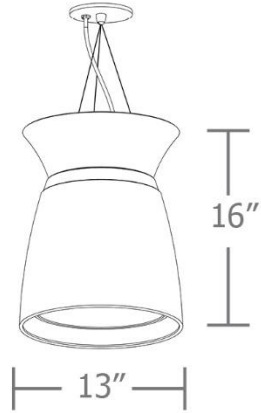

**P4117**

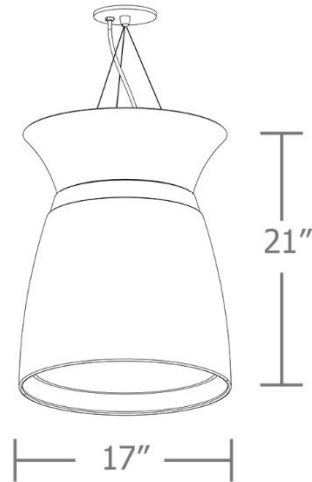

direct / indirect

- P4109 (9"): 995–2780 lm / 970 lm
- P4113 (13"): 1585–4120 lm / 775-1940 lm
- P4117 (17"): 2580–4985 lm / 775-2135 lm




## construction

5" dia. mounting canopy with ultrathin stainless steel Wisp® cable tripod and tiny field adjustable grippers for exact mounting height

dual COB Direct/ Indirect light distribution  
w/ dual circuit option  
2700K, 3000K, 3500K, 4000K  
**90+ CRI** standard

integral programmable drivers, field  
maintainable, universal input (120-277v),  
0-10v controllable to 1% dimming

15 standard powder  
coat paint finishes  
+ custom RAL colors

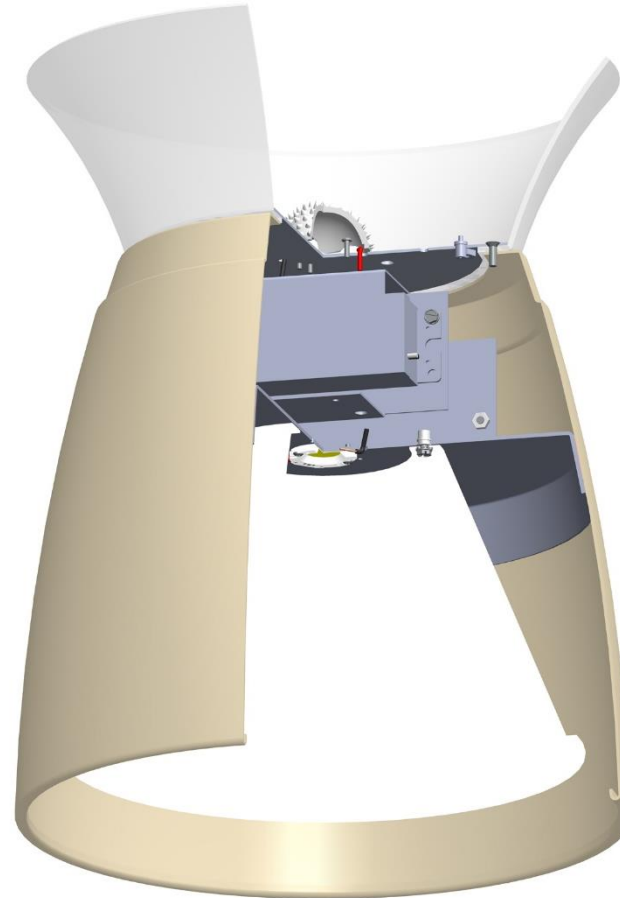


translucent white acrylic  
inverted bell up light element  
**gives tiki.aura its glow!**

.050" spun aluminum conical  
reflector finished in high reflectance  
(>92%) matte white powder coat


precision CNC spun .063"  
aluminum downlight housing  
with rolled bottom edge for added  
strength.

downlight portion either open  
or optional flat frosted lens

# performance

Schedule						
Symbol	QTY	Manufacturer	Catalog Number	Description	Lamp	Wattage
	1	Impact Architectural Lighting LLC	P4117 40 HI 40 HI	17" dia. pendant tiki.aura luminaire w/ open bottom	4000k 90cri LED	68


Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
tiki.aura	+	33.1 fc	56.4 fc	24.2 fc	2.3:1	1.4:1

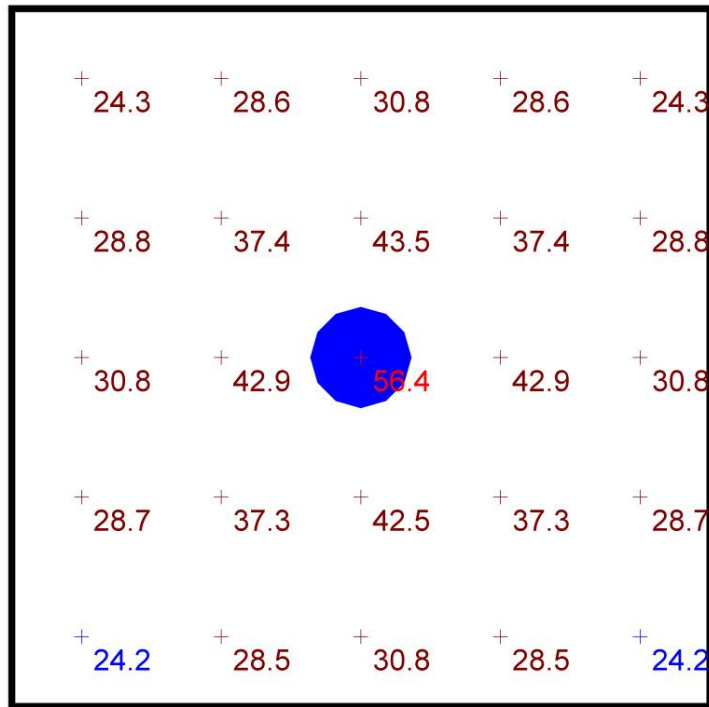

Plan View  
Scale - 1" = 2ft

- 10' x 10' x 16'H space
- 80/50/20 reflectances
- bottom of fixture at 12' aff
- FC readings at 2.5' aff
- layout conducted using P4117-40HI-40HI lumen package **90 cri** (4550 lm direct/ 2135 lm indirect delivered lumens)



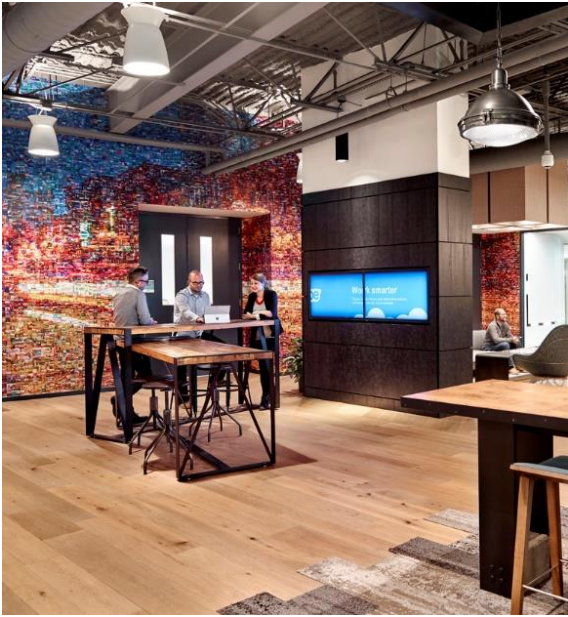

[www.impactltg.com](http://www.impactltg.com)

- spec sheet and color chart
- photometric files
- built to order in Saint Louis, MO, USA
- 4-week lead time

tiki.aura™ 5-slider

